

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204097

Luminaire Tested: **LSR6B40D010BZ EC6B30509730 6LBNMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204097  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B40D010BZ EC6B30509730 6LBNMW1  
Description: PORTFOLIO 6IN CYLINDER  
NARROW DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2251.0 lumens  
Efficiency: N/A  
Efficacy: 53.9 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204097

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBNMW1

### Luminous Intensity Polar Plot

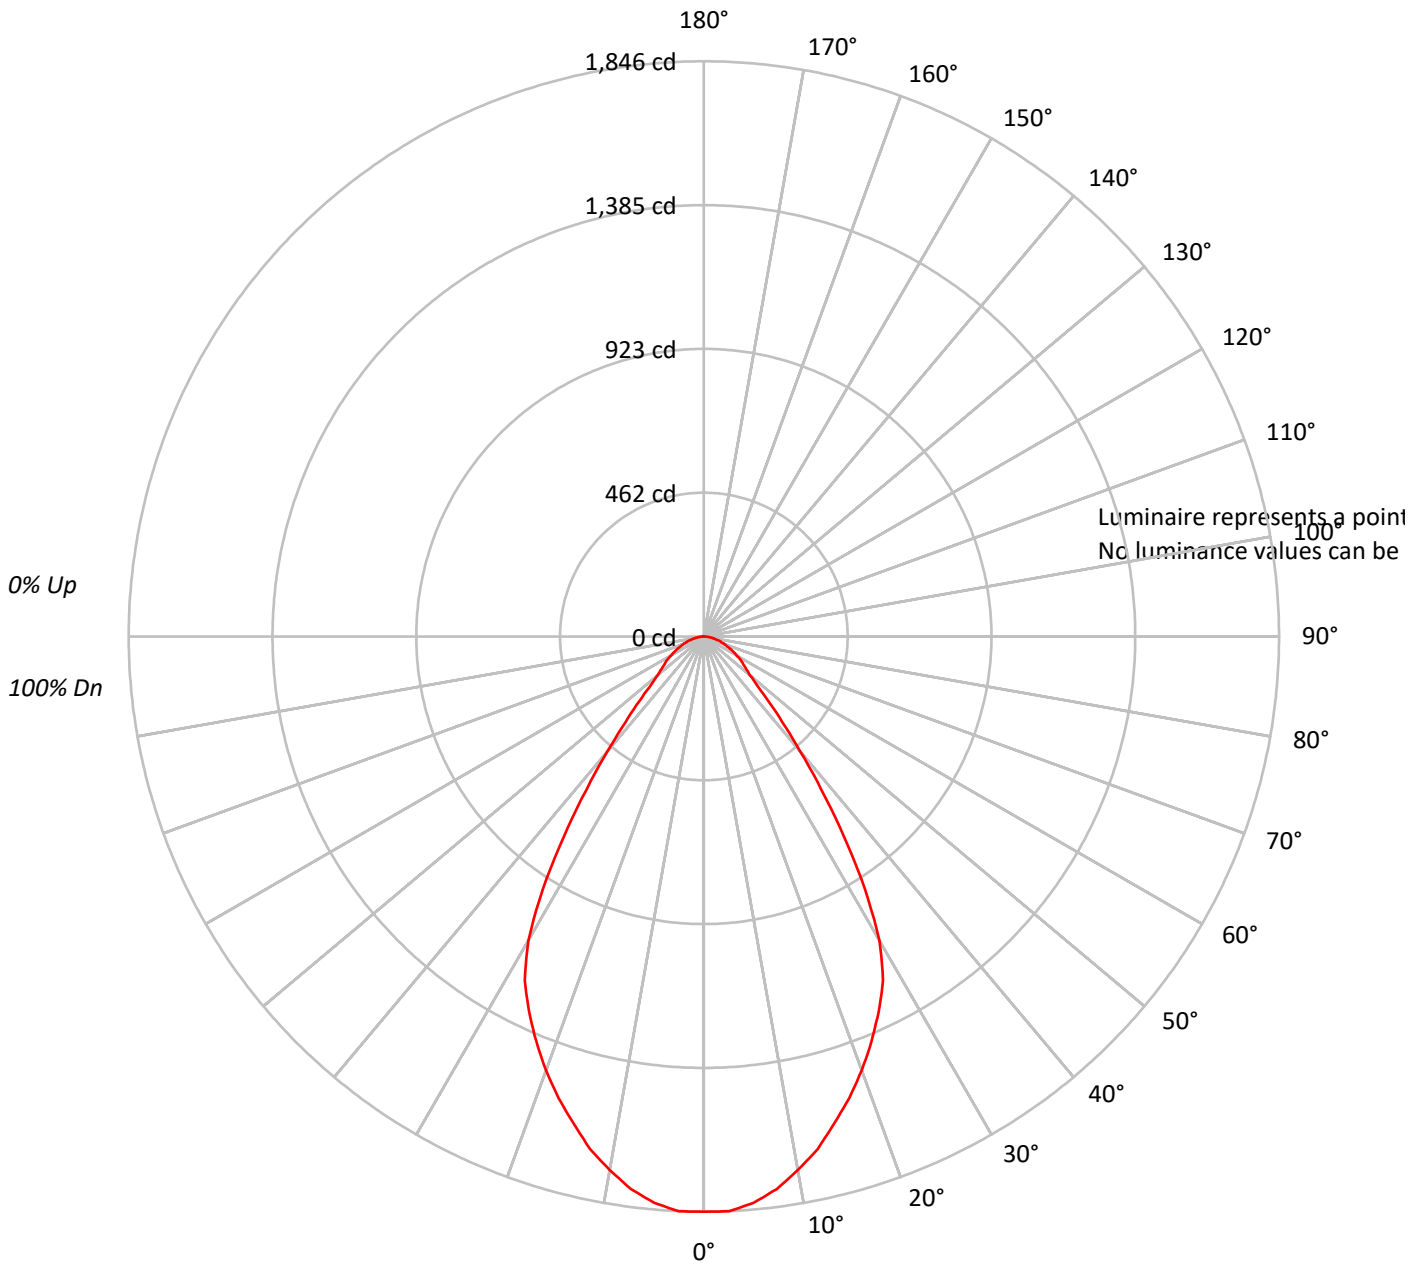



TEST NUMBER: P204097

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBNMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90																																				
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81																																				
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73																																				
4	92	83	76	71	90	82	76	71	80	74	70	77	73	69	75	71	68	66																																				
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																																				
6	81	71	64	59	80	70	63	59	68	63	58	67	62	58	66	61	57	56																																				
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51																																				
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47																																				
9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44																																				
10	65	54	47	43	64	54	47	43	53	47	43	52	46	43	51	46	43	41																																				

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204097

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBNMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	171.4	7.6
10°-20°	454.4	20.2
20°-30°	606.6	26.9
30°-40°	489.4	21.7
40°-50°	234.6	10.4
50°-60°	139.0	6.2
60°-70°	92.4	4.1
70°-80°	49.5	2.2
80°-90°	13.6	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1232.4	54.8
0°-40°	1721.8	76.5
0°-60°	2095.4	93.1
0°-90°	2251.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2251.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1846	
5°	1825	171
15°	1617	454
25°	1327	607
35°	784	489
45°	290	235
55°	154	139
65°	93	92
75°	46	50
85°	11	14
90°	0	



TEST NUMBER: P204097

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBNMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1846.1
2.5°	1846.1
5°	1824.6
7.5°	1788.8
10°	1738.7
12.5°	1685.1
15°	1617.1
17.5°	1552.7
20°	1481.1
22.5°	1406.0
25°	1327.3
27.5°	1245.0
30°	1127.0
32.5°	962.4
35°	783.5
37.5°	618.9
40°	479.4
42.5°	372.1
45°	289.8
47.5°	229.0
50°	193.2
52.5°	171.7
55°	153.8
57.5°	139.5
60°	121.6
62.5°	107.3
65°	93.0
67.5°	78.7
70°	68.0
72.5°	57.2
75°	46.5
77.5°	35.8
80°	28.6
82.5°	21.5
85°	10.7
87.5°	3.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)