

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202964

Luminaire Tested: **LSR6B40D010BZ EC6B30509730 6LBWGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202964  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B40D010BZ EC6B30509730 6LBWGPH1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2075.9 lumens  
Efficiency: N/A  
Efficacy: 49.7 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202964

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBWGPH1

### Luminous Intensity Polar Plot

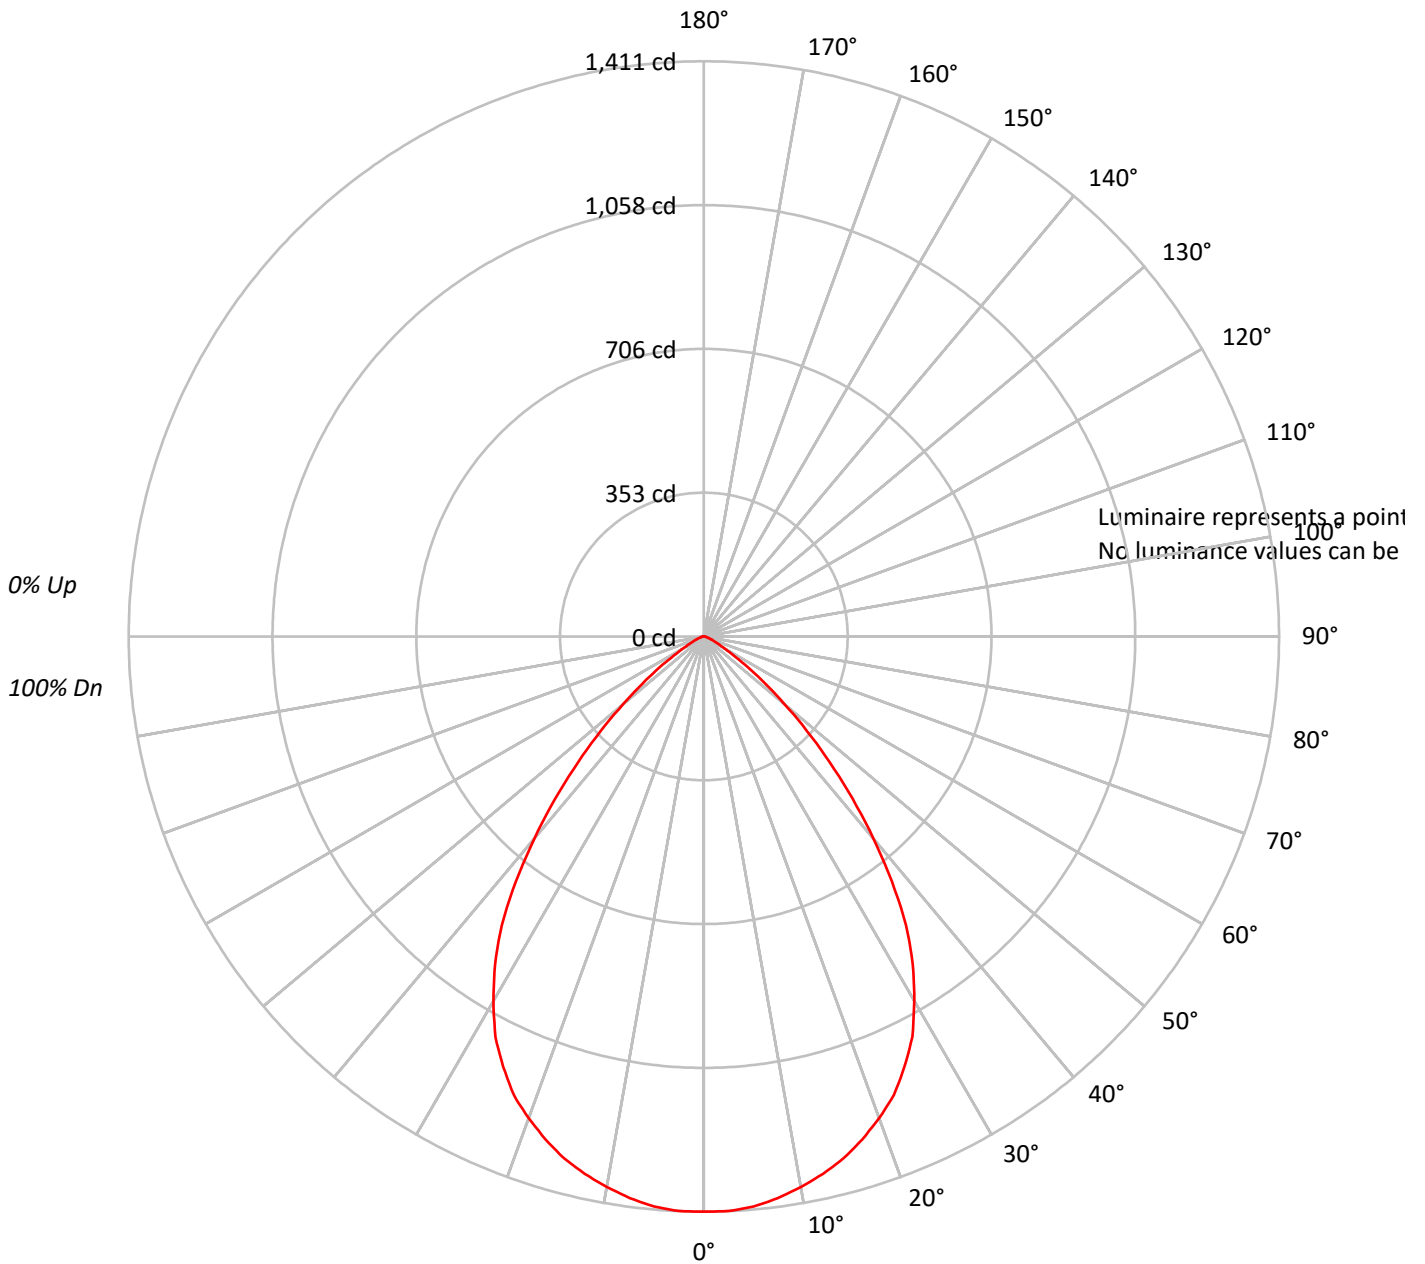



TEST NUMBER: P202964

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBWGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82		
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74		
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67		
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61		
6	81	71	64	59	80	70	63	59	68	62	58	67	62	58	65	61	57	56		
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51		
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47		
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43		
10	64	53	46	42	63	52	46	42	51	45	41	51	45	41	50	45	41	40		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202964

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBWGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	132.9	6.4
10°-20°	372.7	18.0
20°-30°	533.3	25.7
30°-40°	531.5	25.6
40°-50°	338.6	16.3
50°-60°	124.8	6.0
60°-70°	31.2	1.5
70°-80°	9.4	0.5
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1038.9	50.0
0°-40°	1570.5	75.7
0°-60°	2033.9	98.0
0°-90°	2075.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2075.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1411	
5°	1404	133
15°	1325	373
25°	1164	533
35°	864	532
45°	436	339
55°	132	125
65°	29	31
75°	7	9
85°	0	1
90°	0	



TEST NUMBER: P202964

CATALOG NUMBER: LSR6B40D010BZ EC6B30509730 6LBWGPH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1410.9
2.5°	1410.9
5°	1403.8
7.5°	1389.5
10°	1371.6
12.5°	1350.2
15°	1325.2
17.5°	1293.0
20°	1257.3
22.5°	1218.0
25°	1164.5
27.5°	1107.3
30°	1032.3
32.5°	953.7
35°	864.4
37.5°	757.3
40°	646.5
42.5°	539.4
45°	435.8
47.5°	342.9
50°	257.2
52.5°	189.3
55°	132.2
57.5°	85.7
60°	57.2
62.5°	39.3
65°	28.6
67.5°	21.4
70°	17.9
72.5°	10.7
75°	7.1
77.5°	7.1
80°	3.6
82.5°	3.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)