

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203160

Luminaire Tested: **LSR6B40D010BZ EC6B30508035 6LBWMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203160  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B40D010BZ EC6B30508035 6LBWMW1  
Description: PORTFOLIO 6IN CYLINDER  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4046.5 lumens  
Efficiency: N/A  
Efficacy: 96.8 lumens/watt  
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203160

CATALOG NUMBER: LSR6B40D010BZ EC6B30508035 6LBWMW1

### Luminous Intensity Polar Plot

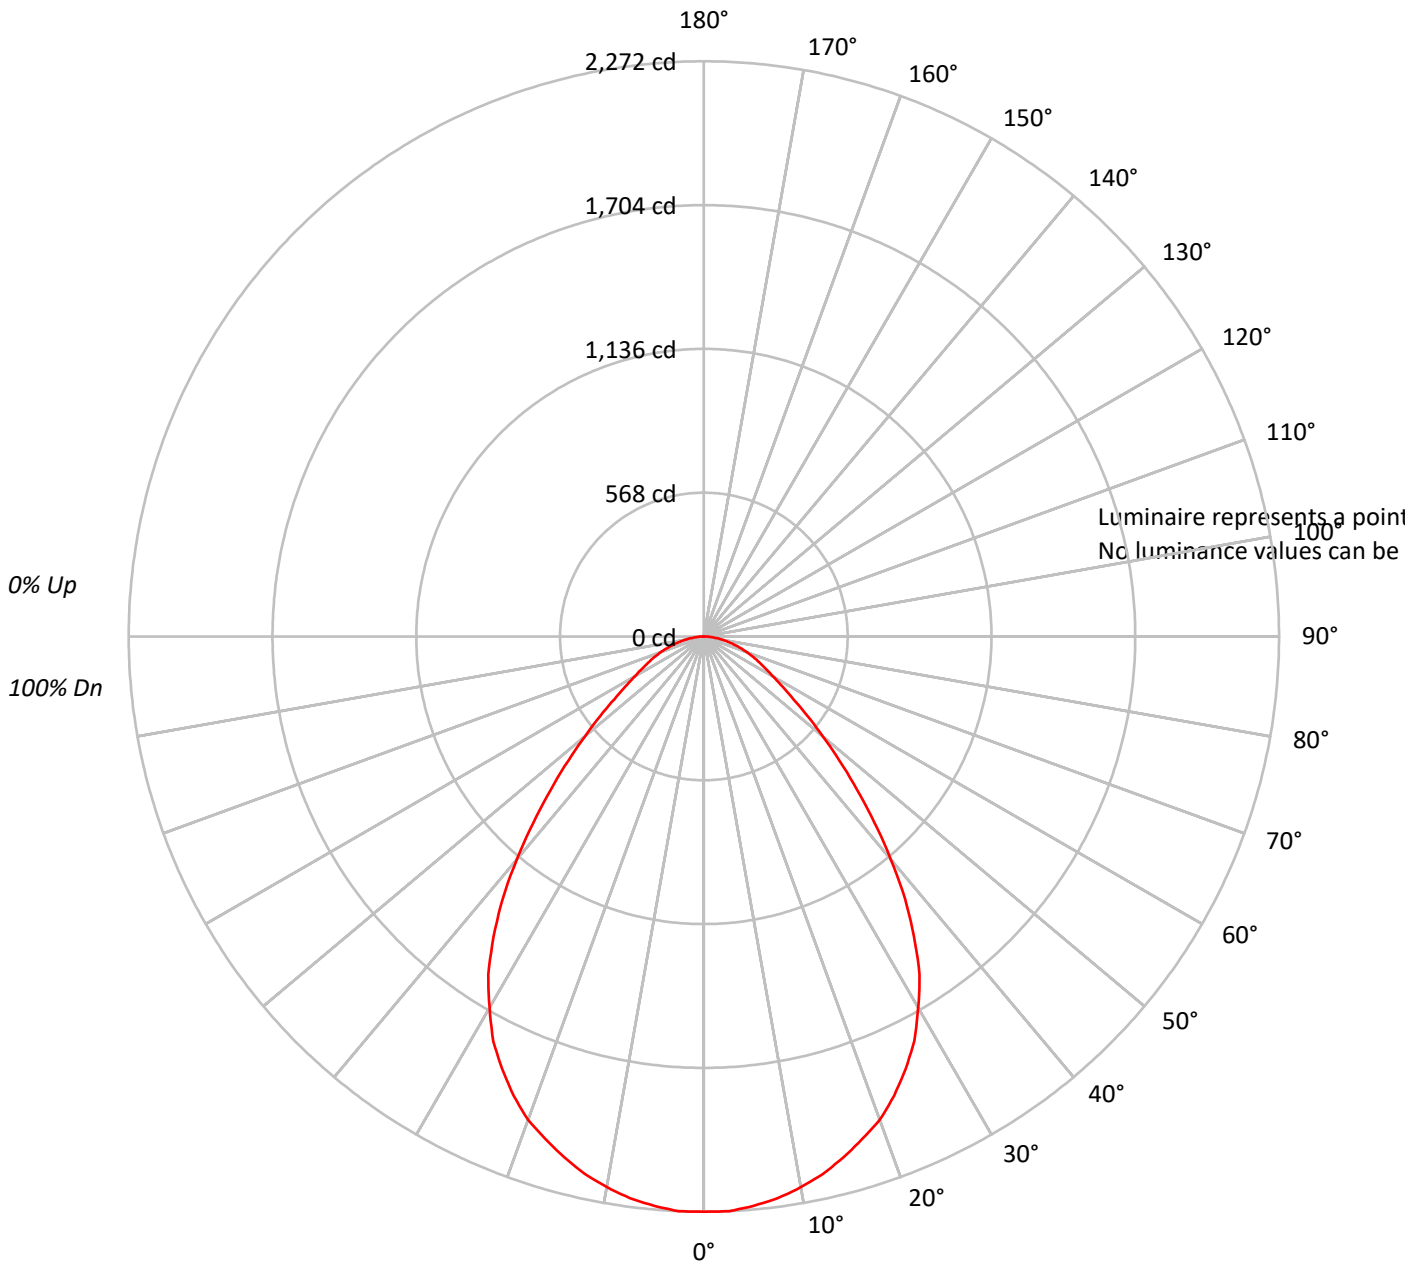



TEST NUMBER: P203160

CATALOG NUMBER: LSR6B40D010BZ EC6B30508035 6LBWMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77																			
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68																			
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60																			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54																			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49																			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44																			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40																			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37																			
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203160

CATALOG NUMBER: LSR6B40D010BZ EC6B30508035 6LBWMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	214.0	5.3
10°-20°	600.1	14.8
20°-30°	864.7	21.4
30°-40°	897.8	22.2
40°-50°	663.8	16.4
50°-60°	396.5	9.8
60°-70°	240.9	6.0
70°-80°	132.0	3.3
80°-90°	36.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1678.9	41.5
0°-40°	2576.6	63.7
0°-60°	3636.9	89.9
0°-90°	4046.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4046.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2272	
5°	2258	214
15°	2130	600
25°	1885	865
35°	1448	898
45°	854	664
55°	432	396
65°	240	241
75°	123	132
85°	29	37
90°	0	



TEST NUMBER: P203160

CATALOG NUMBER: LSR6B40D010BZ EC6B30508035 6LBWMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2272.4
2.5°	2272.4
5°	2257.7
7.5°	2238.0
10°	2208.6
12.5°	2174.2
15°	2130.0
17.5°	2081.0
20°	2031.9
22.5°	1963.2
25°	1884.7
27.5°	1801.2
30°	1693.2
32.5°	1585.3
35°	1447.8
37.5°	1305.5
40°	1148.5
42.5°	996.3
45°	854.0
47.5°	726.4
50°	613.5
52.5°	515.3
55°	431.9
57.5°	368.1
60°	314.1
62.5°	274.8
65°	240.5
67.5°	211.0
70°	181.6
72.5°	152.1
75°	122.7
77.5°	98.2
80°	73.6
82.5°	54.0
85°	29.4
87.5°	14.7
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)