

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204713

Luminaire Tested: **LSR6B40D010BZ EC6B30509035 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204713
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30509035 6LBPSMW1
Description: PORTFOLIO 6IN CYLINDER
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3930.5 lumens
Efficiency: N/A
Efficacy: 94.0 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204713

CATALOG NUMBER: LSR6B40D010BZ EC6B30509035 6LBPSMW1

Luminous Intensity Polar Plot

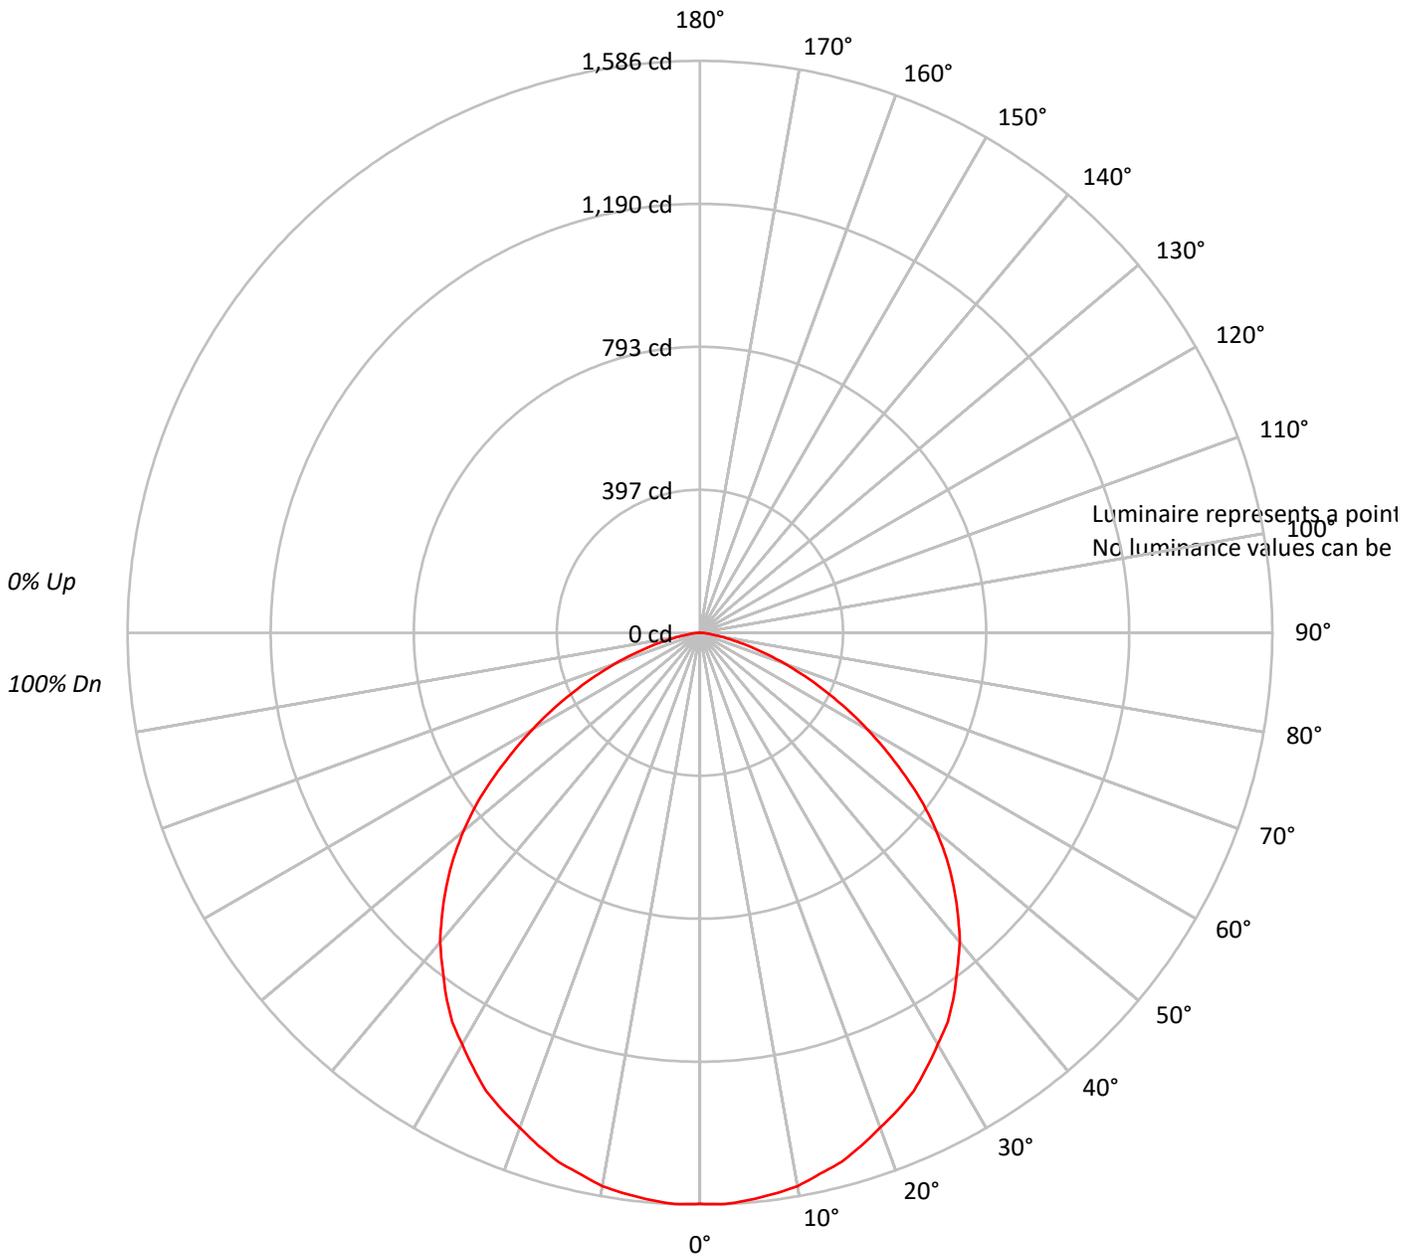




TEST NUMBER: P204713

CATALOG NUMBER: LSR6B40D010BZ EC6B30509035 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86			
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74			
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63			
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54			
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47			
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42			
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37			
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33			
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30			
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27			

AVERAGE LUMINANCE (cd/sqm):

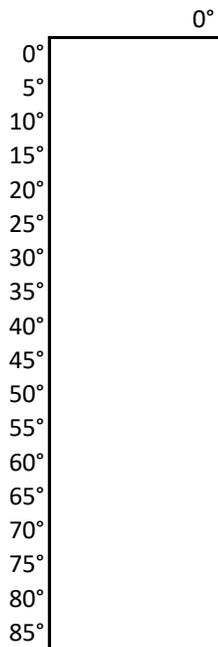



TEST NUMBER: P204713

CATALOG NUMBER: LSR6B40D010BZ EC6B30509035 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.0	3.8
10°-20°	427.7	10.9
20°-30°	644.2	16.4
30°-40°	766.5	19.5
40°-50°	765.1	19.5
50°-60°	622.2	15.8
60°-70°	382.8	9.7
70°-80°	148.3	3.8
80°-90°	23.7	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1221.9	31.1
0°-40°	1988.4	50.6
0°-60°	3375.7	85.9
0°-90°	3930.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3930.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1584	
5°	1579	150
15°	1518	428
25°	1402	644
35°	1227	766
45°	994	765
55°	696	622
65°	384	383
75°	135	148
85°	19	24
90°	0	



TEST NUMBER: P204713

CATALOG NUMBER: LSR6B40D010BZ EC6B30509035 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1583.6
2.5°	1585.9
5°	1579.0
7.5°	1569.6
10°	1558.0
12.5°	1537.0
15°	1518.4
17.5°	1490.5
20°	1460.2
22.5°	1432.2
25°	1402.0
27.5°	1360.1
30°	1318.1
32.5°	1278.5
35°	1227.3
37.5°	1171.4
40°	1120.2
42.5°	1057.3
45°	994.4
47.5°	926.9
50°	854.7
52.5°	780.2
55°	696.3
57.5°	614.8
60°	535.6
62.5°	458.8
65°	384.3
67.5°	314.4
70°	249.2
72.5°	188.6
75°	135.1
77.5°	88.5
80°	53.6
82.5°	32.6
85°	18.6
87.5°	9.3
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)