

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203573

Luminaire Tested: **LSR6B40D010BZ EC6B30508040 6LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203573
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30508040 6LBMMW1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3470.5 lumens
Efficiency: N/A
Efficacy: 83.0 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203573

CATALOG NUMBER: LSR6B40D010BZ EC6B30508040 6LBMMW1

Luminous Intensity Polar Plot

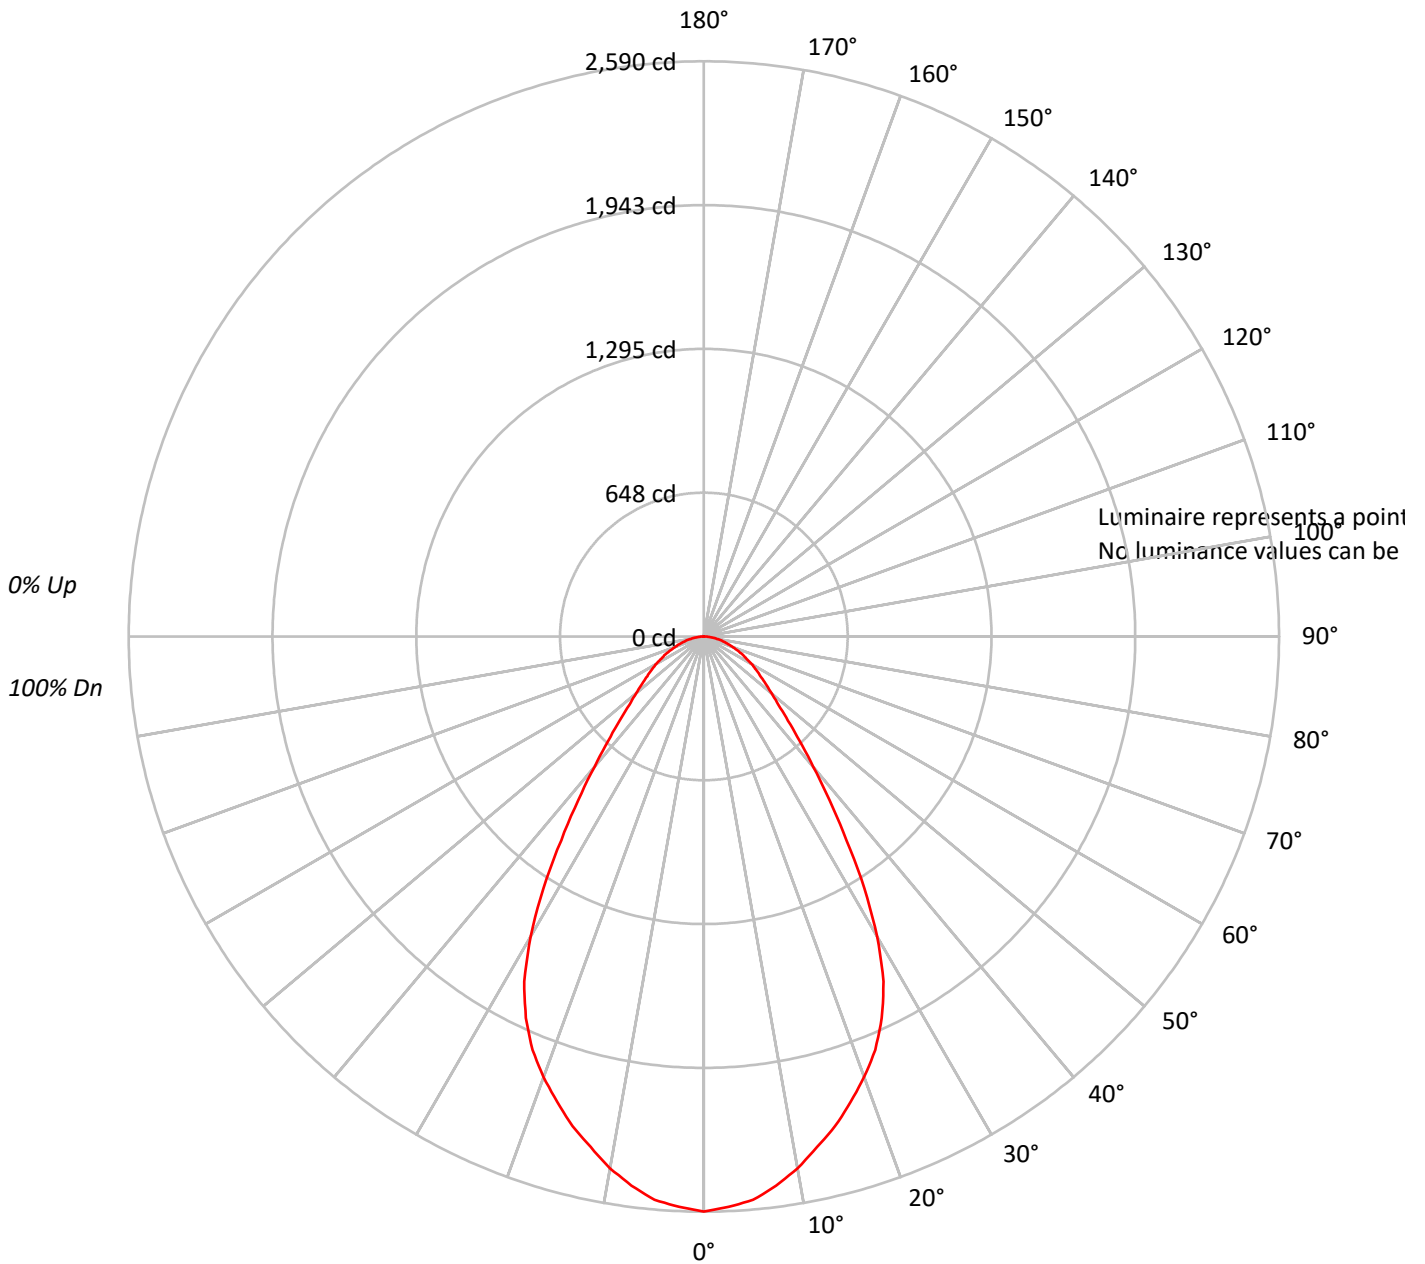



TEST NUMBER: P203573

CATALOG NUMBER: LSR6B40D010BZ EC6B30508040 6LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89		
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79		
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71		
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64		
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58		
6	79	68	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53		
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48		
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44		
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41		
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203573

CATALOG NUMBER: LSR6B40D010BZ EC6B30508040 6LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	239.2	6.9
10°-20°	640.8	18.5
20°-30°	860.4	24.8
30°-40°	705.7	20.3
40°-50°	423.8	12.2
50°-60°	281.6	8.1
60°-70°	188.8	5.4
70°-80°	101.6	2.9
80°-90°	28.6	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1740.3	50.1
0°-40°	2446.0	70.5
0°-60°	3151.5	90.8
0°-90°	3470.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3470.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2590	
5°	2546	239
15°	2283	641
25°	1896	860
35°	1120	706
45°	536	424
55°	311	282
65°	192	189
75°	96	102
85°	24	29
90°	0	



TEST NUMBER: P203573

CATALOG NUMBER: LSR6B40D010BZ EC6B30508040 6LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2589.6
2.5°	2570.4
5°	2546.5
7.5°	2493.8
10°	2431.6
12.5°	2355.0
15°	2283.2
17.5°	2197.1
20°	2110.9
22.5°	2015.2
25°	1895.5
27.5°	1751.9
30°	1560.4
32.5°	1345.0
35°	1120.1
37.5°	928.6
40°	765.9
42.5°	636.6
45°	536.1
47.5°	454.7
50°	397.3
52.5°	349.4
55°	311.1
57.5°	277.6
60°	248.9
62.5°	215.4
65°	191.5
67.5°	162.7
70°	138.8
72.5°	114.9
75°	95.7
77.5°	76.6
80°	57.4
82.5°	43.1
85°	23.9
87.5°	9.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)