

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202755

Luminaire Tested: **LSR6B40D010BZ EC6B30509040 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202755
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30509040 6LBWH1
Description: PORTFOLIO 6IN CYLINDER
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3206.3 lumens
Efficiency: N/A
Efficacy: 76.7 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202755

CATALOG NUMBER: LSR6B40D010BZ EC6B30509040 6LBWH1

Luminous Intensity Polar Plot

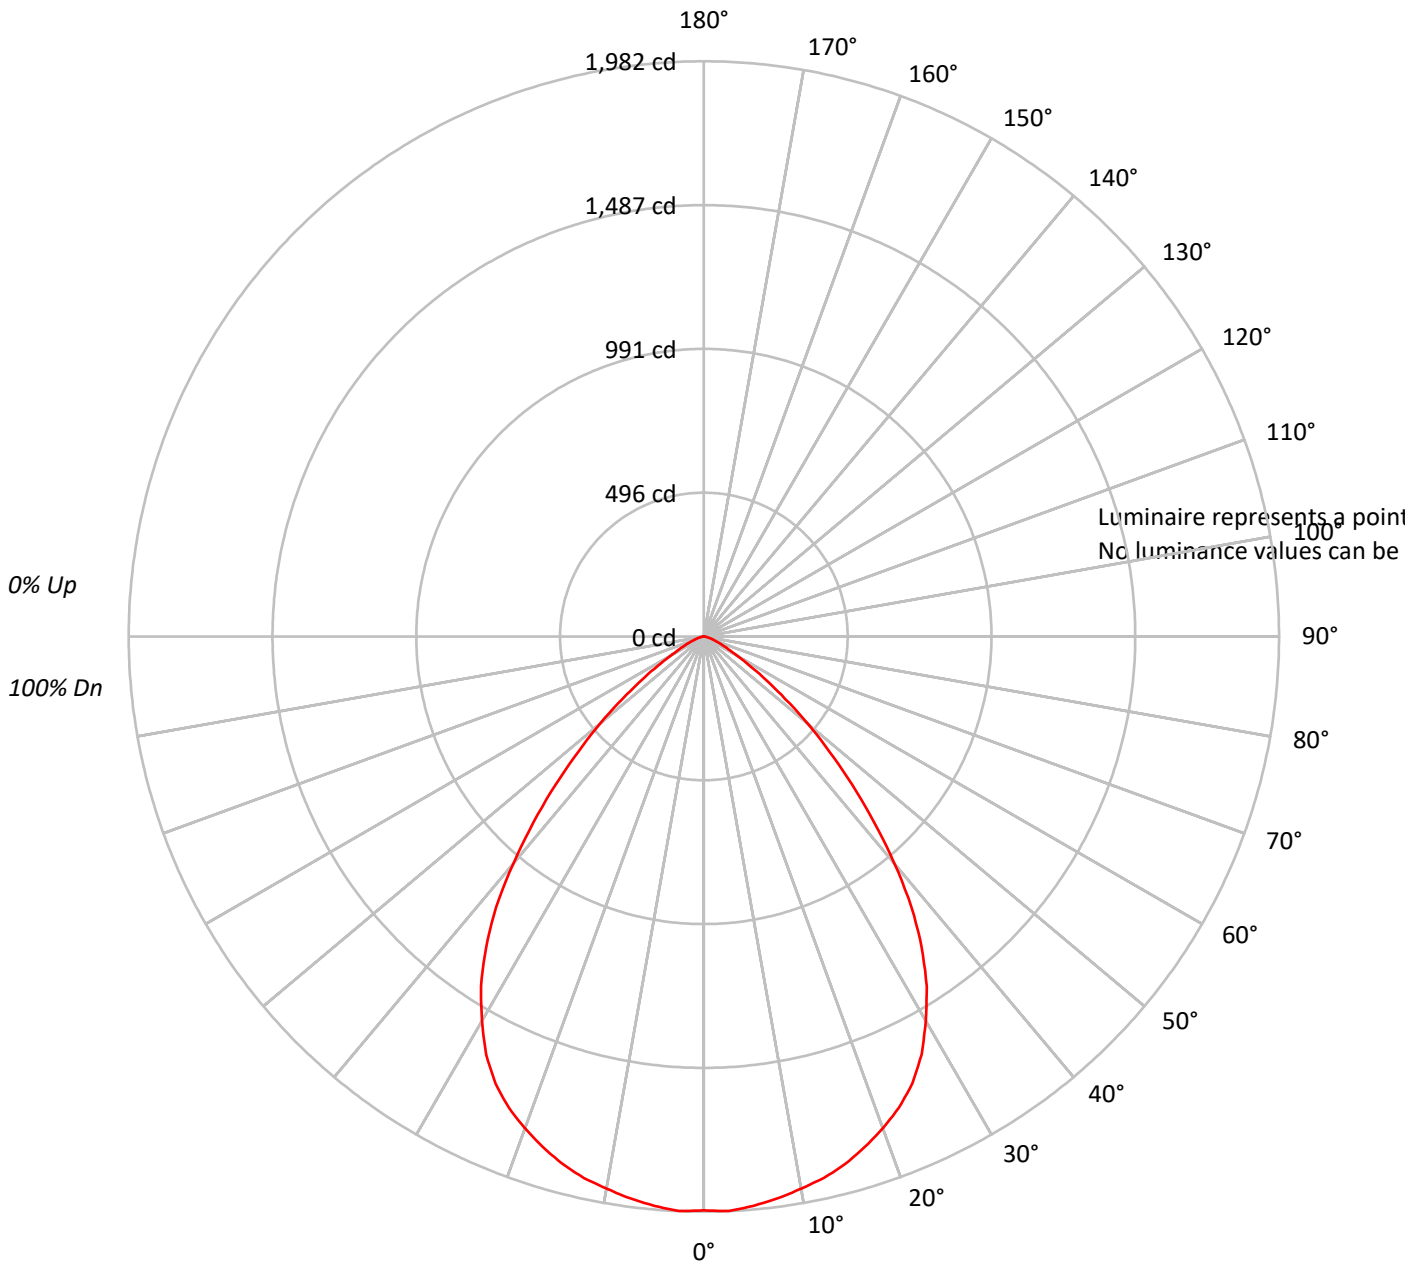



TEST NUMBER: P202755

CATALOG NUMBER: LSR6B40D010BZ EC6B30509040 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91																																				
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81																																				
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73																																				
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65																																				
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59																																				
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53																																				
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49																																				
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44																																				
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41																																				
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38																																				

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202755

CATALOG NUMBER: LSR6B40D010BZ EC6B30509040 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.8	5.8
10°-20°	530.0	16.5
20°-30°	777.1	24.2
30°-40°	808.8	25.2
40°-50°	559.6	17.5
50°-60°	243.6	7.6
60°-70°	74.7	2.3
70°-80°	22.4	0.7
80°-90°	3.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1493.9	46.6
0°-40°	2302.6	71.8
0°-60°	3105.7	96.9
0°-90°	3206.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3206.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1978	
5°	1969	187
15°	1882	530
25°	1699	777
35°	1309	809
45°	723	560
55°	262	244
65°	71	75
75°	21	22
85°	4	3
90°	0	



TEST NUMBER: P202755

CATALOG NUMBER: LSR6B40D010BZ EC6B30509040 6LBWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1977.6
2.5°	1981.7
5°	1969.3
7.5°	1952.7
10°	1931.9
12.5°	1911.1
15°	1882.0
17.5°	1844.6
20°	1803.1
22.5°	1757.4
25°	1699.2
27.5°	1624.5
30°	1528.9
32.5°	1429.2
35°	1308.7
37.5°	1175.8
40°	1022.0
42.5°	868.3
45°	722.9
47.5°	585.8
50°	465.3
52.5°	353.1
55°	261.7
57.5°	187.0
60°	128.8
62.5°	95.6
65°	70.6
67.5°	54.0
70°	37.4
72.5°	29.1
75°	20.8
77.5°	12.5
80°	8.3
82.5°	4.2
85°	4.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)