

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205320

Luminaire Tested: **LSR6B40D010BZ EC6B30508050 6LBNI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205320  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B40D010BZ EC6B30508050 6LBNLI1  
Description: PORTFOLIO 6IN CYLINDER  
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3438.9 lumens  
Efficiency: N/A  
Efficacy: 82.3 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205320

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNLI1

### Luminous Intensity Polar Plot

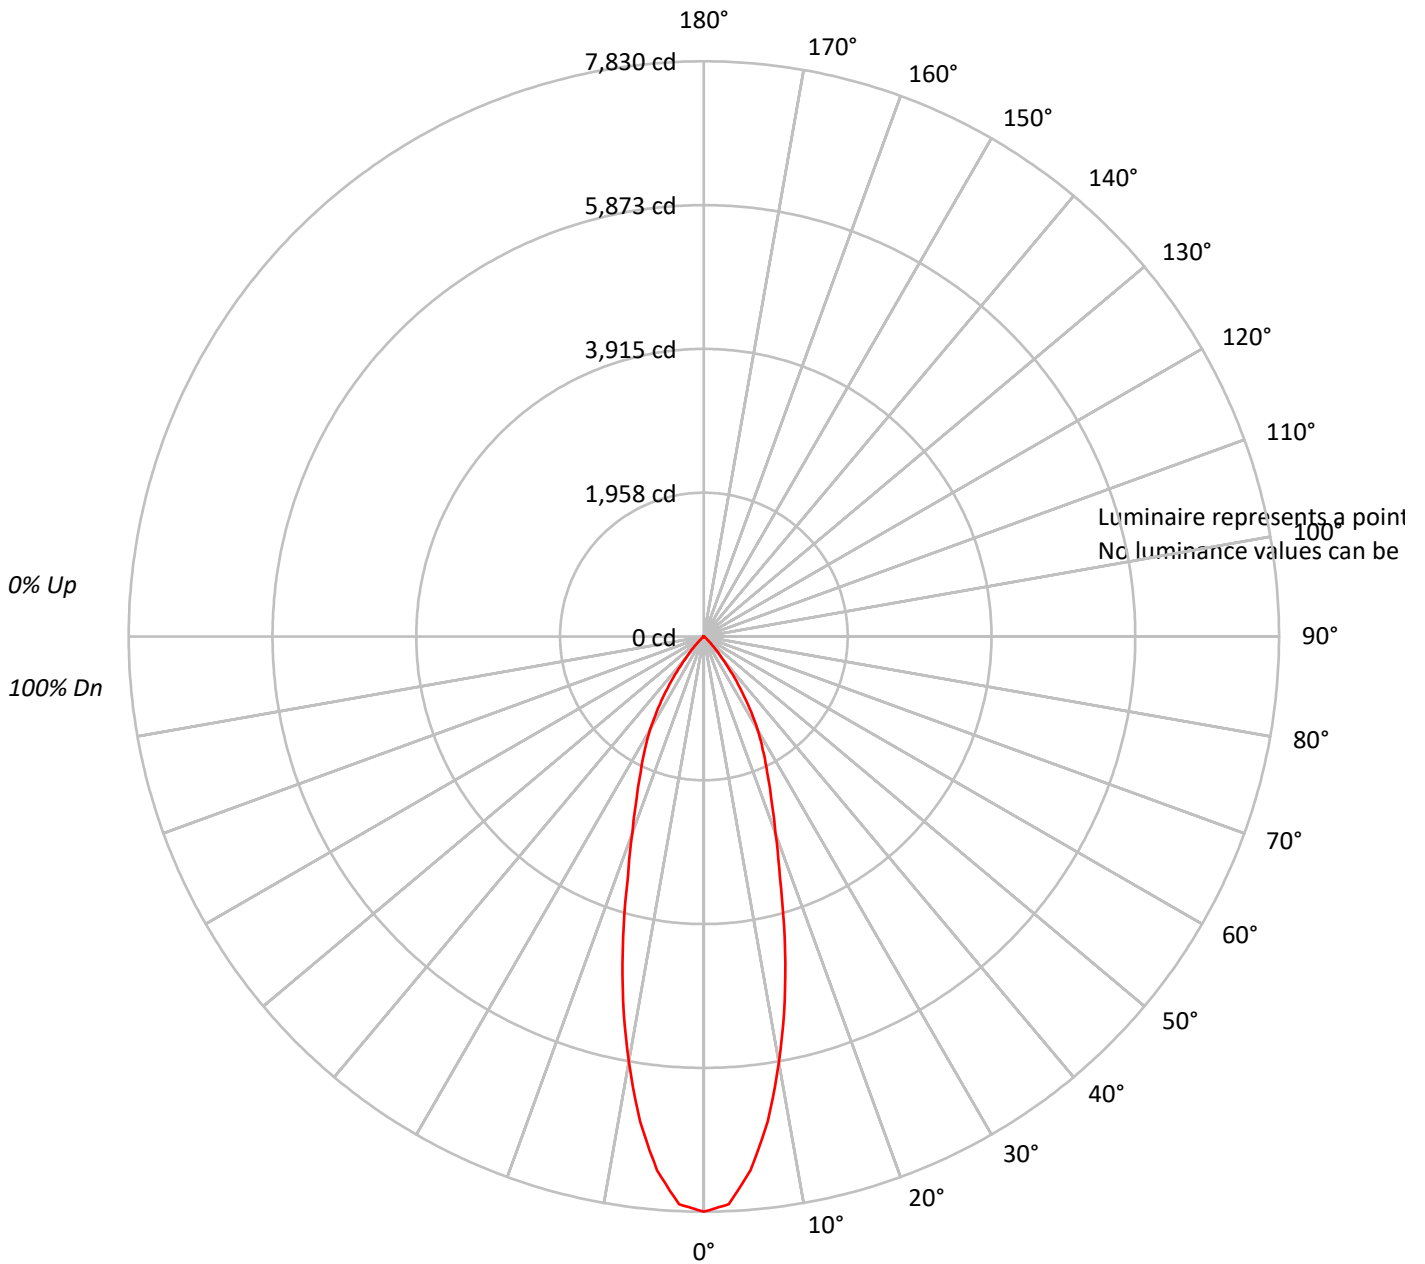




TEST NUMBER: P205320

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									20
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95																												
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89																												
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	85																												
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80																												
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76																												
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	72																												
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68																												
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	65																												
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62																												
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	59																												

**AVERAGE LUMINANCE (cd/sqm):**

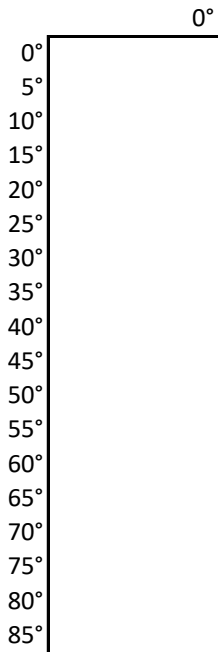



TEST NUMBER: P205320

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	651.0	18.9
10°-20°	1168.4	34.0
20°-30°	944.7	27.5
30°-40°	544.2	15.8
40°-50°	115.1	3.3
50°-60°	9.9	0.3
60°-70°	5.0	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2764.1	80.4
0°-40°	3308.3	96.2
0°-60°	3433.3	99.8
0°-90°	3438.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3438.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7830	
5°	7294	651
15°	4244	1168
25°	2038	945
35°	863	544
45°	124	115
55°	10	10
65°	5	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P205320

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNLI1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7829.5
2.5°	7735.3
5°	7294.0
7.5°	6659.3
10°	5880.8
12.5°	5082.5
15°	4244.5
17.5°	3436.3
20°	2846.2
22.5°	2395.0
25°	2038.0
27.5°	1735.5
30°	1462.8
32.5°	1160.3
35°	862.8
37.5°	600.0
40°	391.7
42.5°	238.0
45°	124.0
47.5°	49.6
50°	14.9
52.5°	14.9
55°	9.9
57.5°	9.9
60°	5.0
62.5°	5.0
65°	5.0
67.5°	5.0
70°	5.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)