

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204089

Luminaire Tested: **LSR6B40D010BZ EC6B30508050 6LBNMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204089
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30508050 6LBNMW1
Description: PORTFOLIO 6IN CYLINDER
NARROW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3121.7 lumens
Efficiency: N/A
Efficacy: 74.7 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204089

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNMW1

Luminous Intensity Polar Plot

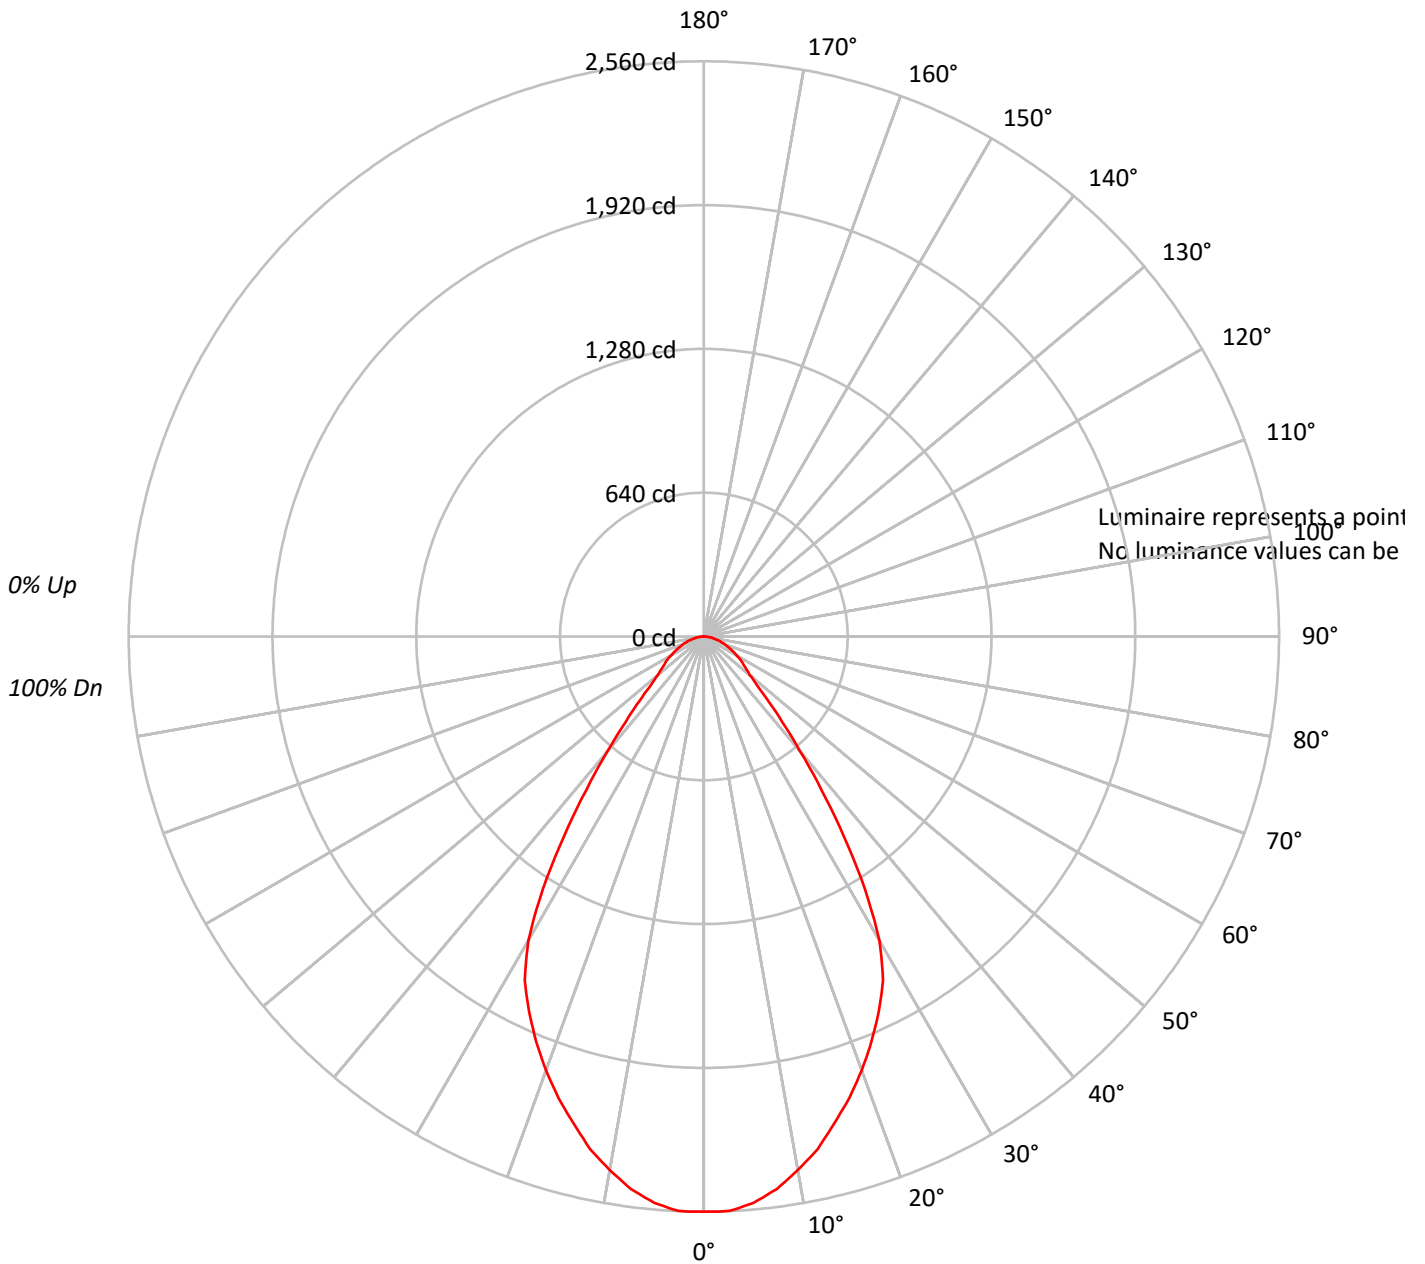



TEST NUMBER: P204089

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90																												
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81																												
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73																												
4	92	83	76	71	90	82	76	71	80	74	70	77	73	69	75	71	68	66																												
5	87	77	70	64	85	76	69	64	74	68	64	72	67	63	70	66	62	61																												
6	81	71	64	59	80	70	63	59	68	63	58	67	62	58	66	61	57	56																												
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51																												
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47																												
9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44																												
10	65	54	47	43	64	54	47	43	53	47	43	52	46	43	51	46	43	41																												

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204089

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	237.7	7.6
10°-20°	630.1	20.2
20°-30°	841.3	26.9
30°-40°	678.7	21.7
40°-50°	325.3	10.4
50°-60°	192.8	6.2
60°-70°	128.2	4.1
70°-80°	68.7	2.2
80°-90°	18.9	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1709.2	54.8
0°-40°	2387.9	76.5
0°-60°	2906.0	93.1
0°-90°	3121.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3121.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2560	
5°	2530	238
15°	2243	630
25°	1841	841
35°	1087	679
45°	402	325
55°	213	193
65°	129	128
75°	64	69
85°	15	19
90°	0	



TEST NUMBER: P204089

CATALOG NUMBER: LSR6B40D010BZ EC6B30508050 6LBNMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2560.1
2.5°	2560.1
5°	2530.4
7.5°	2480.7
10°	2411.3
12.5°	2336.9
15°	2242.6
17.5°	2153.3
20°	2054.1
22.5°	1949.9
25°	1840.7
27.5°	1726.6
30°	1562.9
32.5°	1334.6
35°	1086.6
37.5°	858.3
40°	664.8
42.5°	516.0
45°	401.9
47.5°	317.5
50°	267.9
52.5°	238.2
55°	213.3
57.5°	193.5
60°	168.7
62.5°	148.8
65°	129.0
67.5°	109.2
70°	94.3
72.5°	79.4
75°	64.5
77.5°	49.6
80°	39.7
82.5°	29.8
85°	14.9
87.5°	5.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)