

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P274417

Luminaire Tested: **LD6B20DE010W2N2765 EU6B1020W2N902765 6LBS0H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P274417
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35136)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B20DE010W2N2765 EU6B1020W2N902765 6LBS0H
Description: PORTFOLIO 6" W2N RN DOWNLIGHT, SHALLOW WITH HAZE FINISH
Light Source: W2N 2700K-6500K CCT TUNING RANGE
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1785.3 lumens
Efficiency: N/A
Efficacy: 63.8 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P274417

CATALOG NUMBER: LD6B20DE010W2N2765 EU6B1020W2N902765 6LBS0H

Luminous Intensity Polar Plot

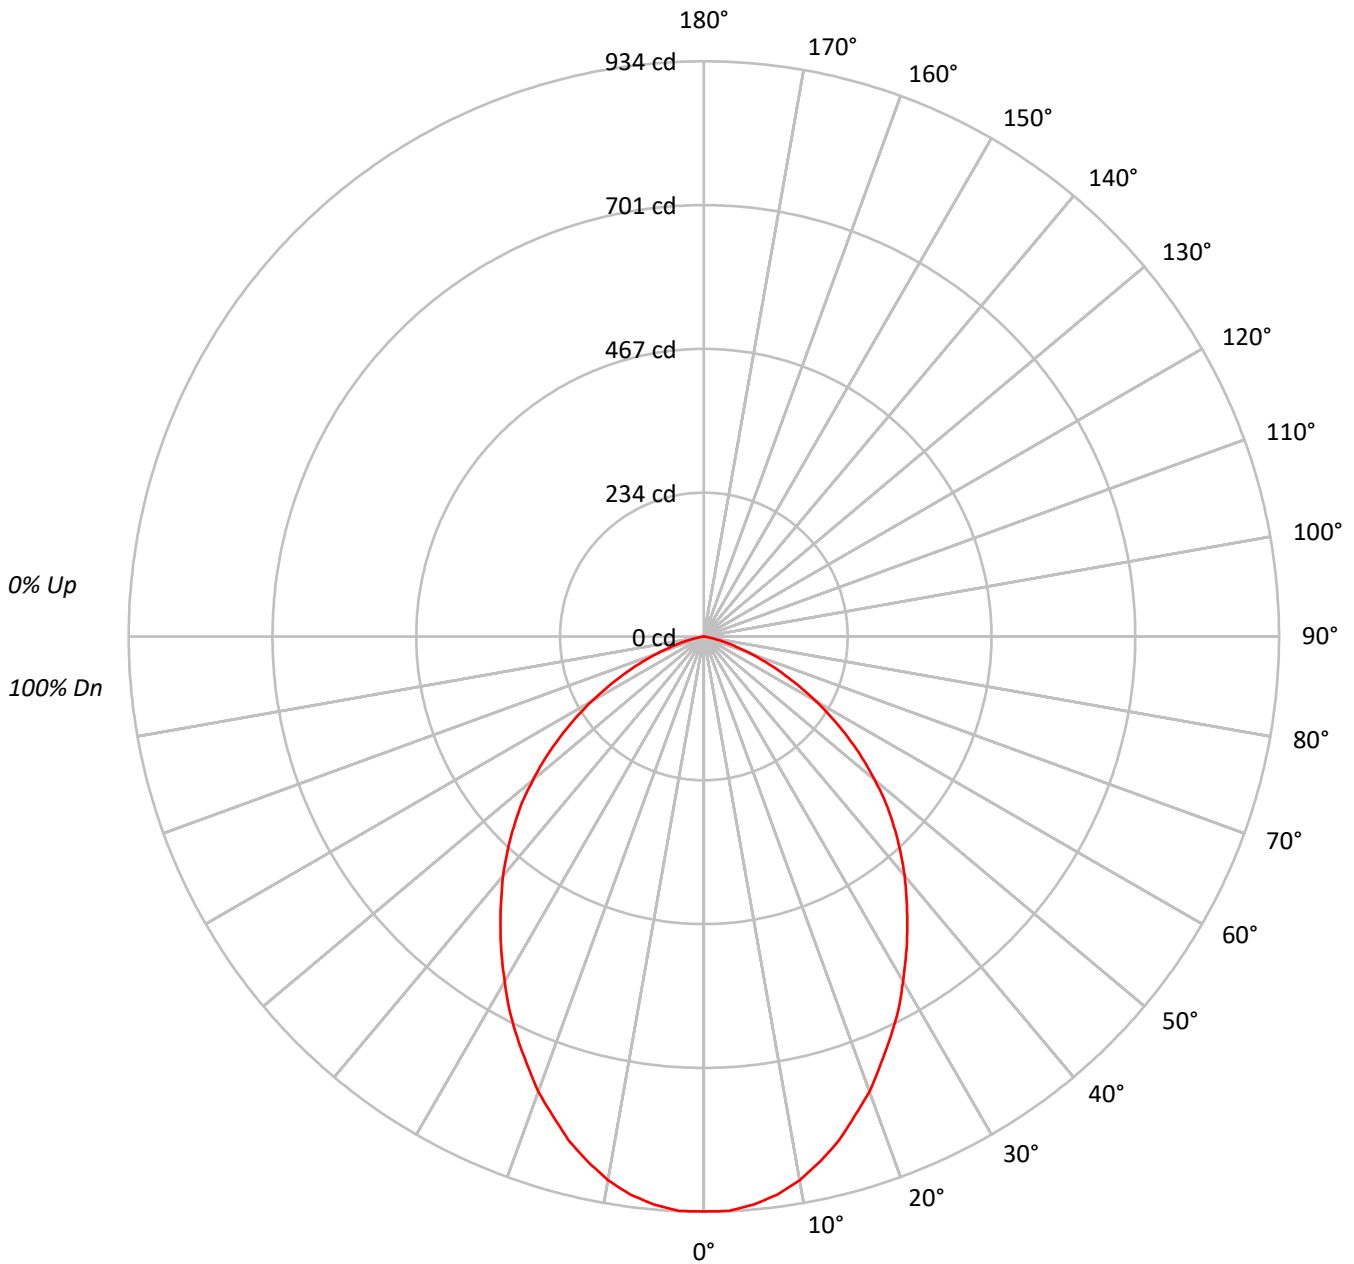



TEST NUMBER: P274417

CATALOG NUMBER: LD6B20DE010W2N2765 EU6B1020W2N902765 6LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60915
5°	60630
10°	59384
15°	57222
20°	54591
25°	51649
30°	48718
35°	45867
40°	43187
45°	40264
50°	36711
55°	32417
60°	27440
65°	21550
70°	15375
75°	8419
80°	1465
85°	0



TEST NUMBER: P274417

CATALOG NUMBER: LD6B20DE010W2N2765 EU6B1020W2N902765 6LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.5	4.9
10°-20°	237.7	13.3
20°-30°	330.1	18.5
30°-40°	360.2	20.2
40°-50°	336.1	18.8
50°-60°	255.1	14.3
60°-70°	139.7	7.8
70°-80°	38.4	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	655.3	36.7
0°-40°	1015.5	56.9
0°-60°	1606.7	90.0
0°-90°	1785.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1785.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	934	
5°	926	87
15°	847	238
25°	718	330
35°	576	360
45°	436	336
55°	285	255
65°	140	140
75°	33	38
85°	0	1
90°	0	



TEST NUMBER: P274417

CATALOG NUMBER: LD6B20DE010W2N2765 EU6B1020W2N902765 6LBS0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	933.7
2.5°	933.7
5°	925.8
7.5°	914.0
10°	896.4
12.5°	872.8
15°	847.2
17.5°	815.8
20°	786.3
22.5°	750.9
25°	717.5
27.5°	684.1
30°	646.7
32.5°	611.3
35°	575.9
37.5°	540.6
40°	507.1
42.5°	471.8
45°	436.4
47.5°	401.0
50°	361.7
52.5°	324.3
55°	285.0
57.5°	247.7
60°	210.3
62.5°	173.0
65°	139.6
67.5°	108.1
70°	80.6
72.5°	55.0
75°	33.4
77.5°	15.7
80°	3.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)