

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179792

Luminaire Tested: **LDA6A65927D010TE LARH20SP 6LFC1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179792
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26681)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A65927D010TE LARH20SP 6LFC1H
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 20° Spot
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4306.2 lumens
Efficiency: N/A
Efficacy: 55.2 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.51
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 78
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179792

CATALOG NUMBER: LDA6A65927D010TE LARH20SP 6LFC1H

Luminous Intensity Polar Plot

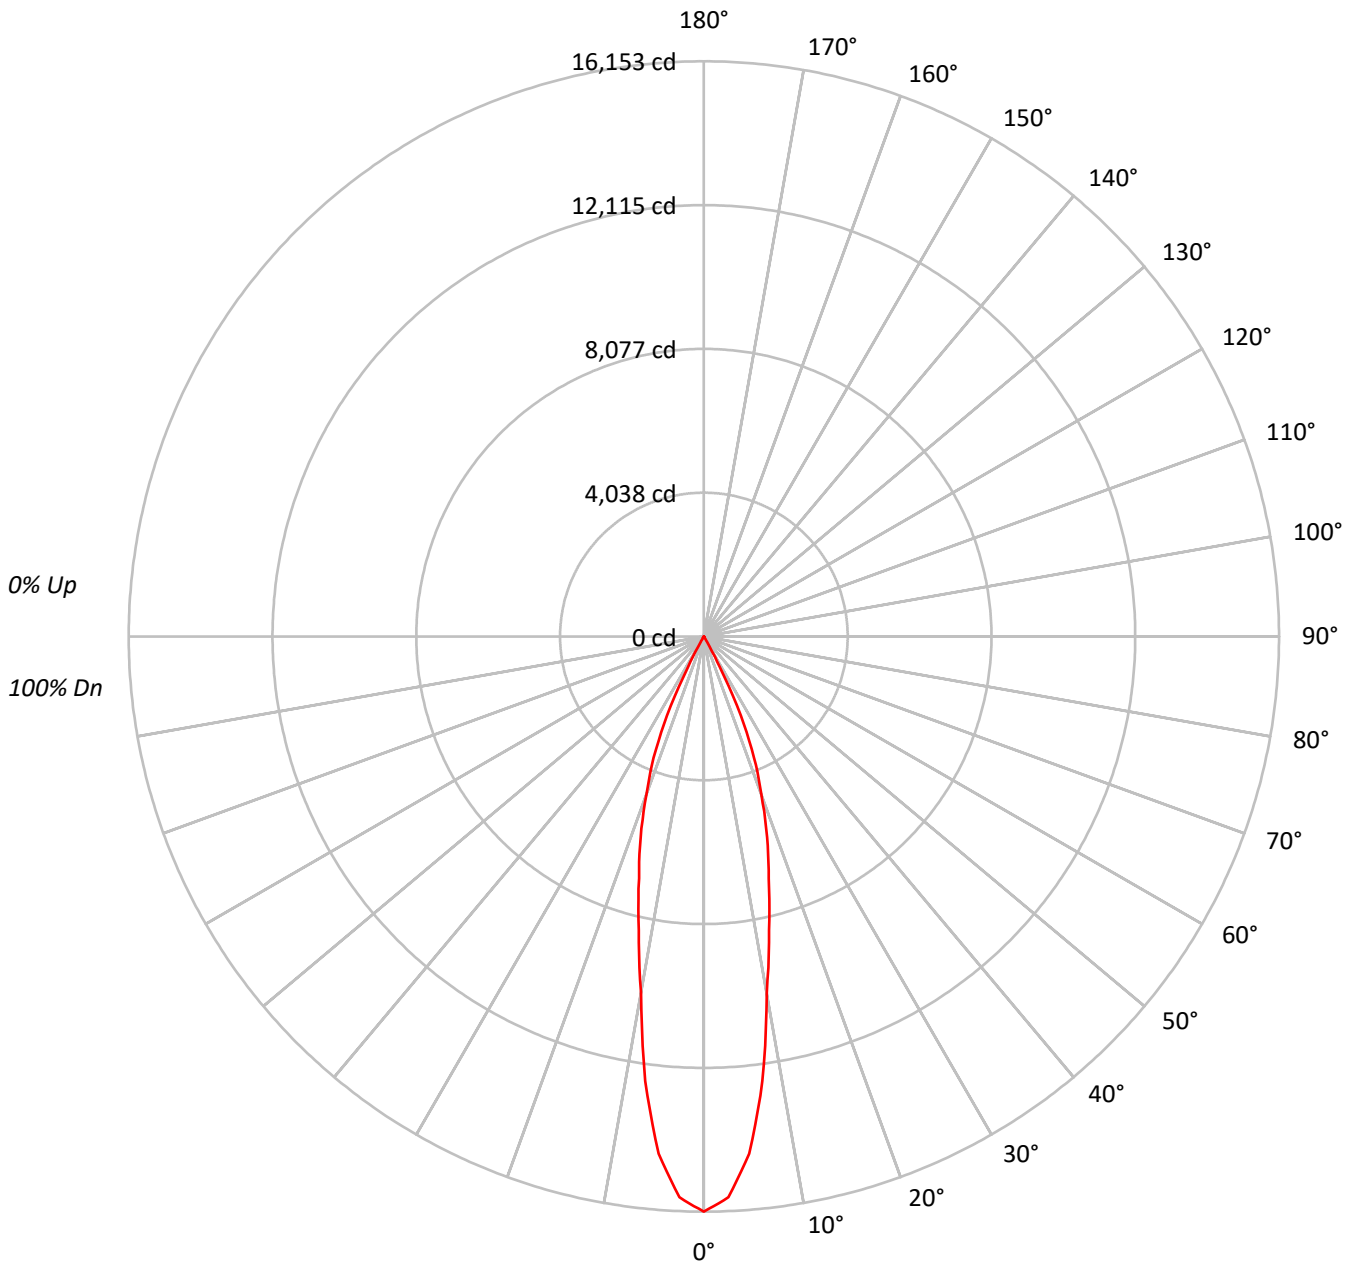



TEST NUMBER: P179792

CATALOG NUMBER: LDA6A65927D010TE LARH20SP 6LFC1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96	96	96	96
2	111	107	104	102	109	106	103	101	103	100	98	100	98	96	97	96	94	93	93	93	93
3	107	103	99	96	106	101	98	95	99	96	94	96	94	92	94	92	91	90	90	90	90
4	104	98	94	91	102	97	94	91	95	92	90	93	91	89	92	89	88	86	86	86	86
5	101	94	90	87	99	94	90	87	92	89	86	91	88	85	89	87	85	83	83	83	83
6	97	91	87	84	96	90	86	83	89	85	83	88	85	82	87	84	82	81	81	81	81
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78	78	78	78
8	92	85	81	78	91	84	80	77	83	80	77	83	79	77	82	79	77	76	76	76	76
9	89	82	78	75	88	82	78	75	81	77	75	80	77	74	79	76	74	73	73	73	73
10	87	80	75	73	86	79	75	73	79	75	72	78	75	72	77	74	72	71	71	71	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	885499
5°	802320
10°	565699
15°	399571
20°	275206
25°	148339
30°	10457
35°	2510
40°	1596
45°	1109
50°	913
55°	593
60°	493
65°	467
70°	289
75°	191
80°	284
85°	0



TEST NUMBER: P179792

CATALOG NUMBER: LDA6A65927D010TE LARH20SP 6LFC1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1247.5	29.0
10°-20°	1967.0	45.7
20°-30°	1037.6	24.1
30°-40°	31.7	0.7
40°-50°	11.5	0.3
50°-60°	6.1	0.1
60°-70°	3.4	0.1
70°-80°	1.3	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4252.0	98.7
0°-40°	4283.7	99.5
0°-60°	4301.3	99.9
0°-90°	4306.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4306.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16153	
5°	14580	###
15°	7040	1967
25°	2452	1038
35°	38	32
45°	14	12
55°	6	6
65°	4	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179792

CATALOG NUMBER: LDA6A65927D010TE LARH20SP 6LFC1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	16152.8
2.5°	15765.4
5°	14579.8
7.5°	12595.1
10°	10162.4
12.5°	8443.8
15°	7040.4
17.5°	5910.1
20°	4717.4
22.5°	3686.2
25°	2452.4
27.5°	961.5
30°	165.2
32.5°	50.9
35°	37.5
37.5°	27.7
40°	22.3
42.5°	17.9
45°	14.3
47.5°	11.6
50°	10.7
52.5°	8.0
55°	6.2
57.5°	5.4
60°	4.5
62.5°	4.5
65°	3.6
67.5°	2.7
70°	1.8
72.5°	1.8
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)