

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179808

Luminaire Tested: **LDA6A65927D010TE LARH30NF 6LFC1H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P179808  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26682)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA6A65927D010TE LARH30NF 6LFC1H  
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 30° Narrow Flood  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4812.4 lumens  
Efficiency: N/A  
Efficacy: 61.7 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 78  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P179808

CATALOG NUMBER: LDA6A65927D010TE LARH30NF 6LFC1H

### Luminous Intensity Polar Plot

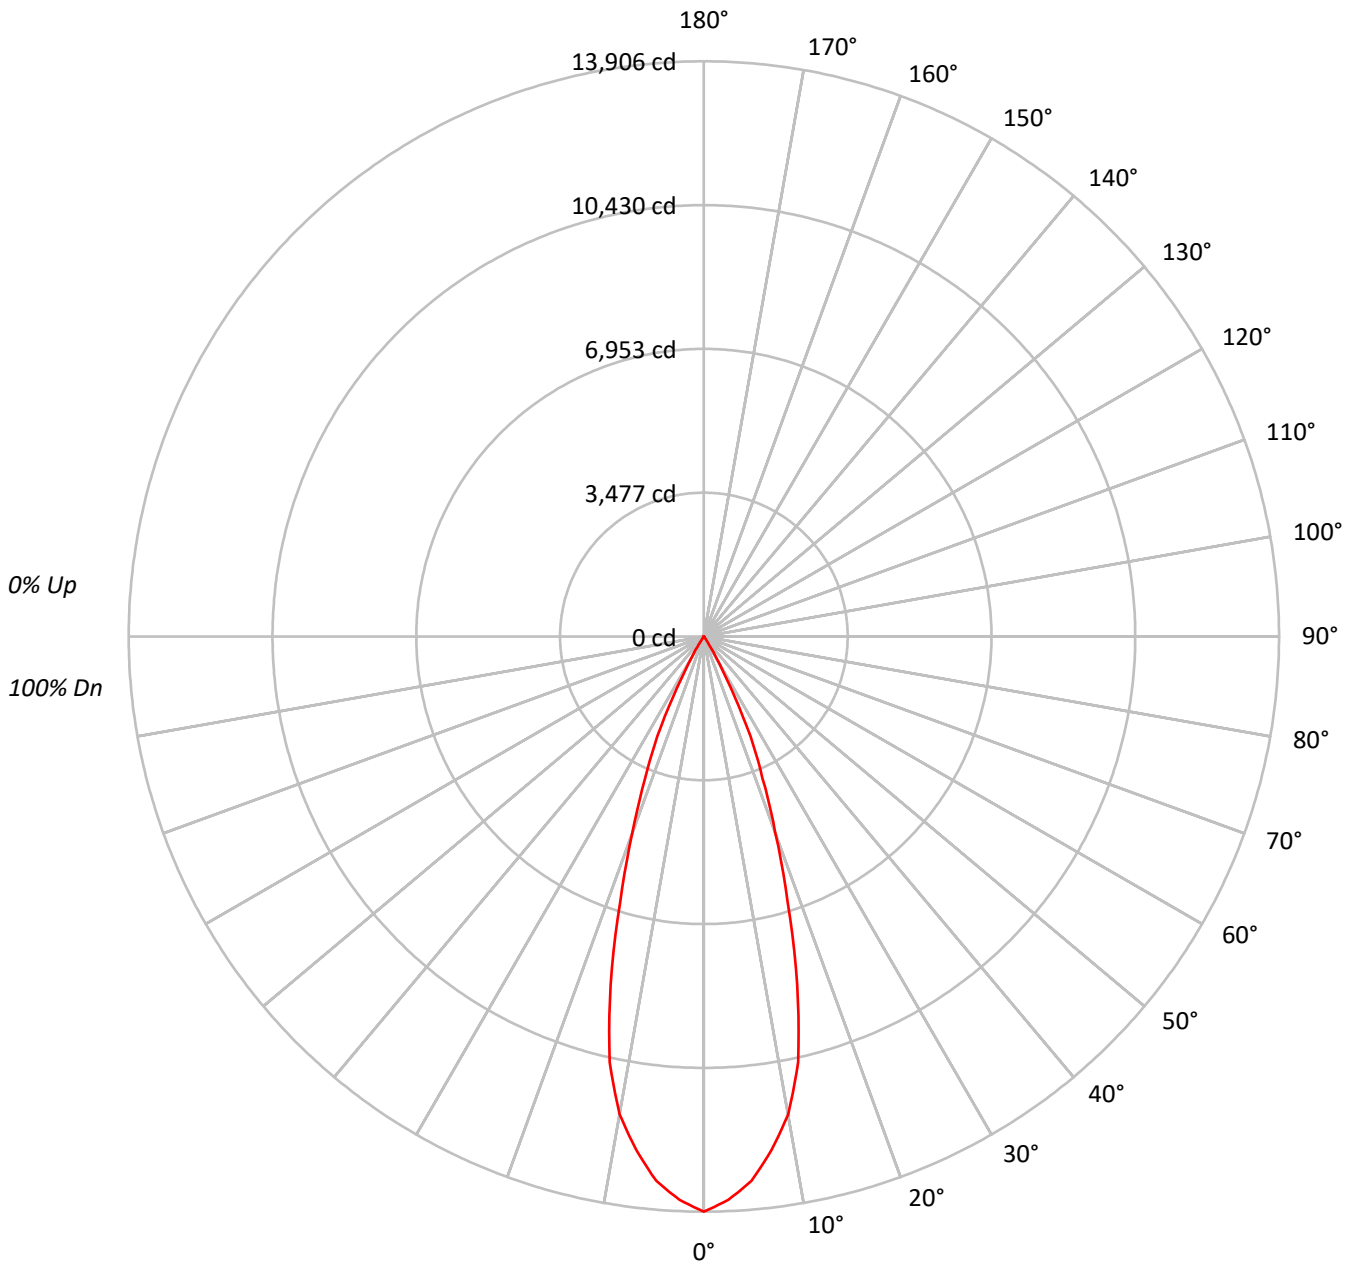



TEST NUMBER: P179808

CATALOG NUMBER: LDA6A65927D010TE LARH30NF 6LFC1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																												
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	92																												
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89																												
4	103	98	94	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86																												
5	100	94	89	86	99	93	89	86	91	88	85	90	87	84	88	86	84	83																												
6	97	90	86	83	96	89	85	82	88	84	82	87	84	81	86	83	81	80																												
7	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77																												
8	91	84	79	76	90	83	79	76	82	79	76	81	78	76	81	78	75	74																												
9	88	81	77	74	87	80	76	73	80	76	73	79	75	73	78	75	73	72																												
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	70																												

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	762357
5°	727144
10°	653100
15°	494651
20°	294230
25°	160769
30°	36569
35°	3467
40°	1403
45°	690
50°	461
55°	430
60°	296
65°	350
70°	289
75°	191
80°	284
85°	0



TEST NUMBER: P179808

CATALOG NUMBER: LDA6A65927D010TE LARH30NF 6LFC1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1212.6	25.2
10°-20°	2334.0	48.5
20°-30°	1160.8	24.1
30°-40°	89.8	1.9
40°-50°	8.0	0.2
50°-60°	3.7	0.1
60°-70°	2.3	0.0
70°-80°	1.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4707.4	97.8
0°-40°	4797.2	99.7
0°-60°	4808.9	99.9
0°-90°	4812.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4812.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	13906	
5°	13214	###
15°	8716	2334
25°	2658	1161
35°	52	90
45°	9	8
55°	4	4
65°	3	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179808

CATALOG NUMBER: LDA6A65927D010TE LARH30NF 6LFC1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	13906.5
2.5°	13631.6
5°	13213.7
7.5°	12518.2
10°	11732.5
12.5°	10537.9
15°	8715.7
17.5°	6731.0
20°	5043.5
22.5°	3699.8
25°	2657.9
27.5°	1392.8
30°	577.7
32.5°	229.5
35°	51.8
37.5°	30.4
40°	19.6
42.5°	13.4
45°	8.9
47.5°	7.1
50°	5.4
52.5°	4.5
55°	4.5
57.5°	3.6
60°	2.7
62.5°	2.7
65°	2.7
67.5°	1.8
70°	1.8
72.5°	0.9
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)