

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179773

Luminaire Tested: **LDA6A65830D010TE LARH40FL 6LAL1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179773
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26680)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A65830D010TE LARH40FL 6LAL1LI
Description: PORTFOLIO 6" Lensed Adjustable, Self-flanged, 40° Flood
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5921.6 lumens
Efficiency: N/A
Efficacy: 75.9 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 78
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179773

CATALOG NUMBER: LDA6A65830D010TE LARH40FL 6LAL1LI

Luminous Intensity Polar Plot

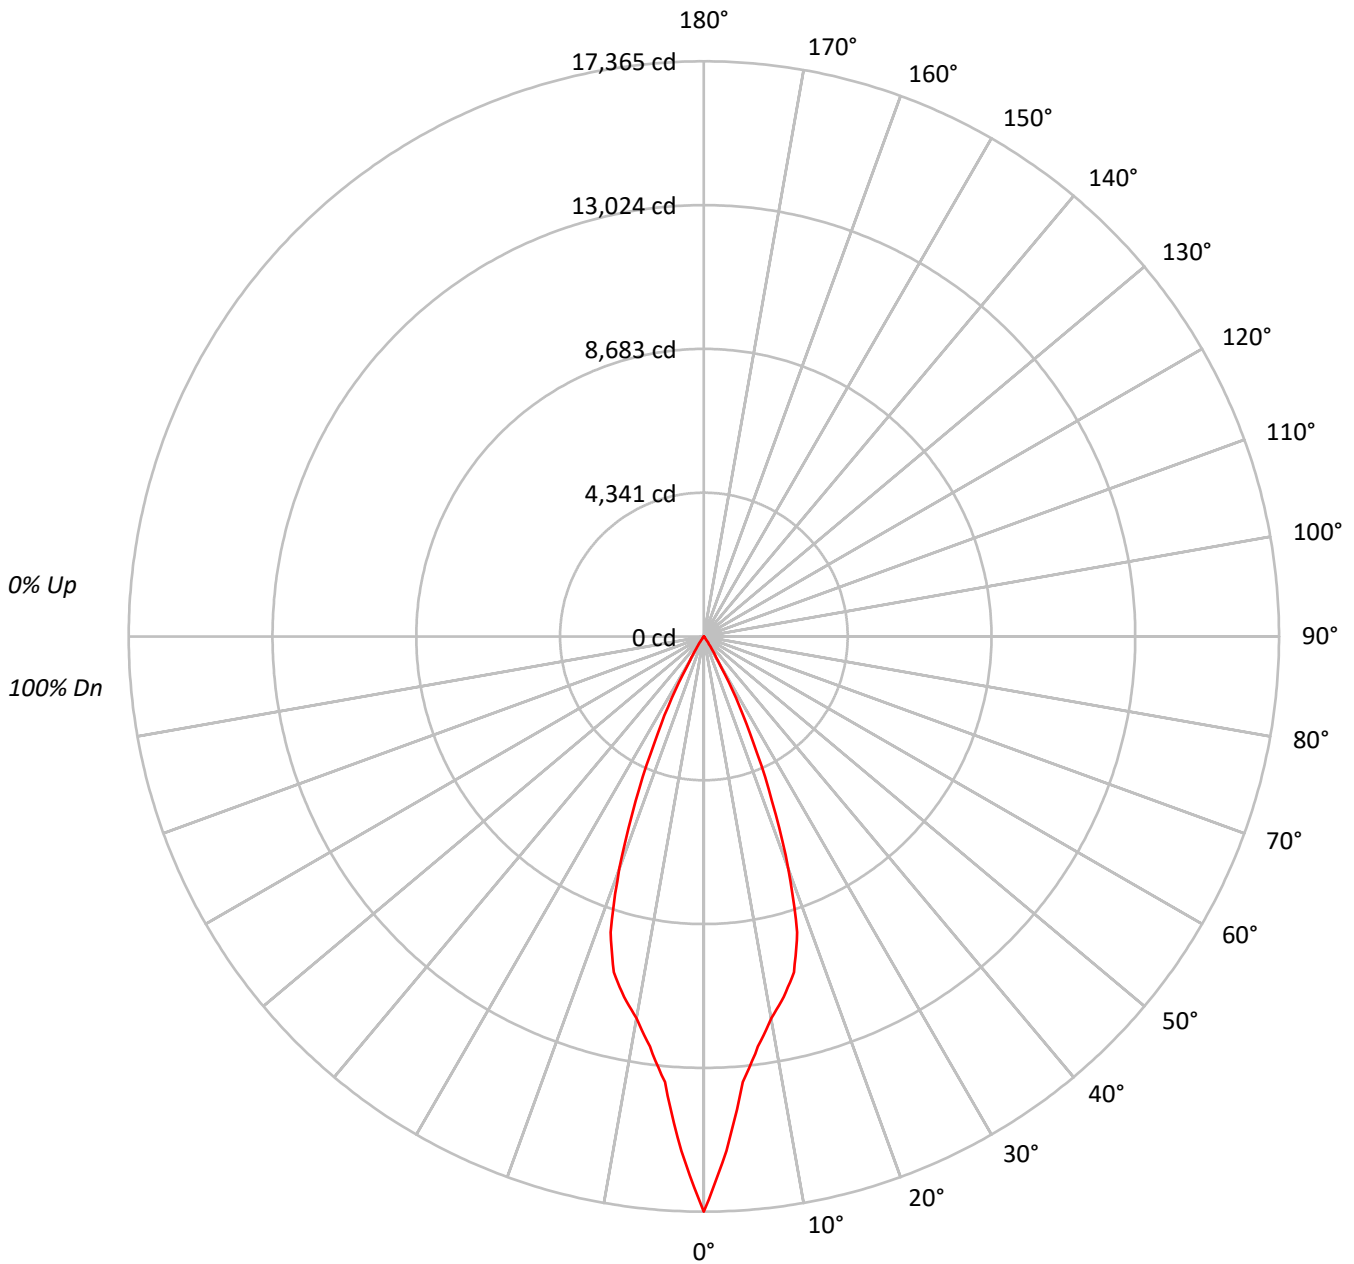



TEST NUMBER: P179773

CATALOG NUMBER: LDA6A65830D010TE LARH40FL 6LAL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96	96	96	96
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	94	98	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	88	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	80	87	83	80	85	82	79	84	81	79	78	78	78	78
7	92	85	80	77	91	85	80	77	83	79	77	82	79	76	81	78	76	75	75	75	75
8	89	82	77	74	88	81	77	74	80	76	74	79	76	73	79	75	73	72	72	72	72
9	86	79	74	71	85	78	74	71	78	74	71	77	73	71	76	73	70	69	69	69	69
10	83	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	67	67	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	951963
5°	743257
10°	651814
15°	595713
20°	435123
25°	212329
30°	51818
35°	11852
40°	2548
45°	1155
50°	588
55°	879
60°	877
65°	739
70°	545
75°	487
80°	347
85°	0



TEST NUMBER: P179773

CATALOG NUMBER: LDA6A65830D010TE LARH40FL 6LAL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1251.3	21.1
10°-20°	2818.7	47.6
20°-30°	1660.4	28.0
30°-40°	162.0	2.7
40°-50°	12.9	0.2
50°-60°	7.3	0.1
60°-70°	5.7	0.1
70°-80°	2.7	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5730.5	96.8
0°-40°	5892.5	99.5
0°-60°	5912.8	99.9
0°-90°	5921.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5921.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	17365	
5°	13506	###
15°	10496	2819
25°	3510	1660
35°	177	162
45°	15	13
55°	9	7
65°	6	6
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P179773

CATALOG NUMBER: LDA6A65830D010TE LARH40FL 6LAL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	17365.2
2.5°	15542.8
5°	13506.5
7.5°	12490.1
10°	11709.4
12.5°	11141.4
15°	10496.4
17.5°	9361.5
20°	7458.6
22.5°	5379.8
25°	3510.3
27.5°	2094.9
30°	818.6
32.5°	428.9
35°	177.1
37.5°	58.6
40°	35.6
42.5°	23.0
45°	14.9
47.5°	9.2
50°	6.9
52.5°	8.0
55°	9.2
57.5°	8.0
60°	8.0
62.5°	6.9
65°	5.7
67.5°	4.6
70°	3.4
72.5°	3.4
75°	2.3
77.5°	2.3
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)