

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179758

Luminaire Tested: **LDA6A65835D010TE LARH30NF 6LAL1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26679)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A65835D010TE LARH30NF 6LAL1LI
Description: PORTFOLIO 6" Lensed Adjustable, Self-flanged, 30° Narrow Flood
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5890.5 lumens
Efficiency: N/A
Efficacy: 75.5 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.51
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 78
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179758

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LAL1LI

Luminous Intensity Polar Plot

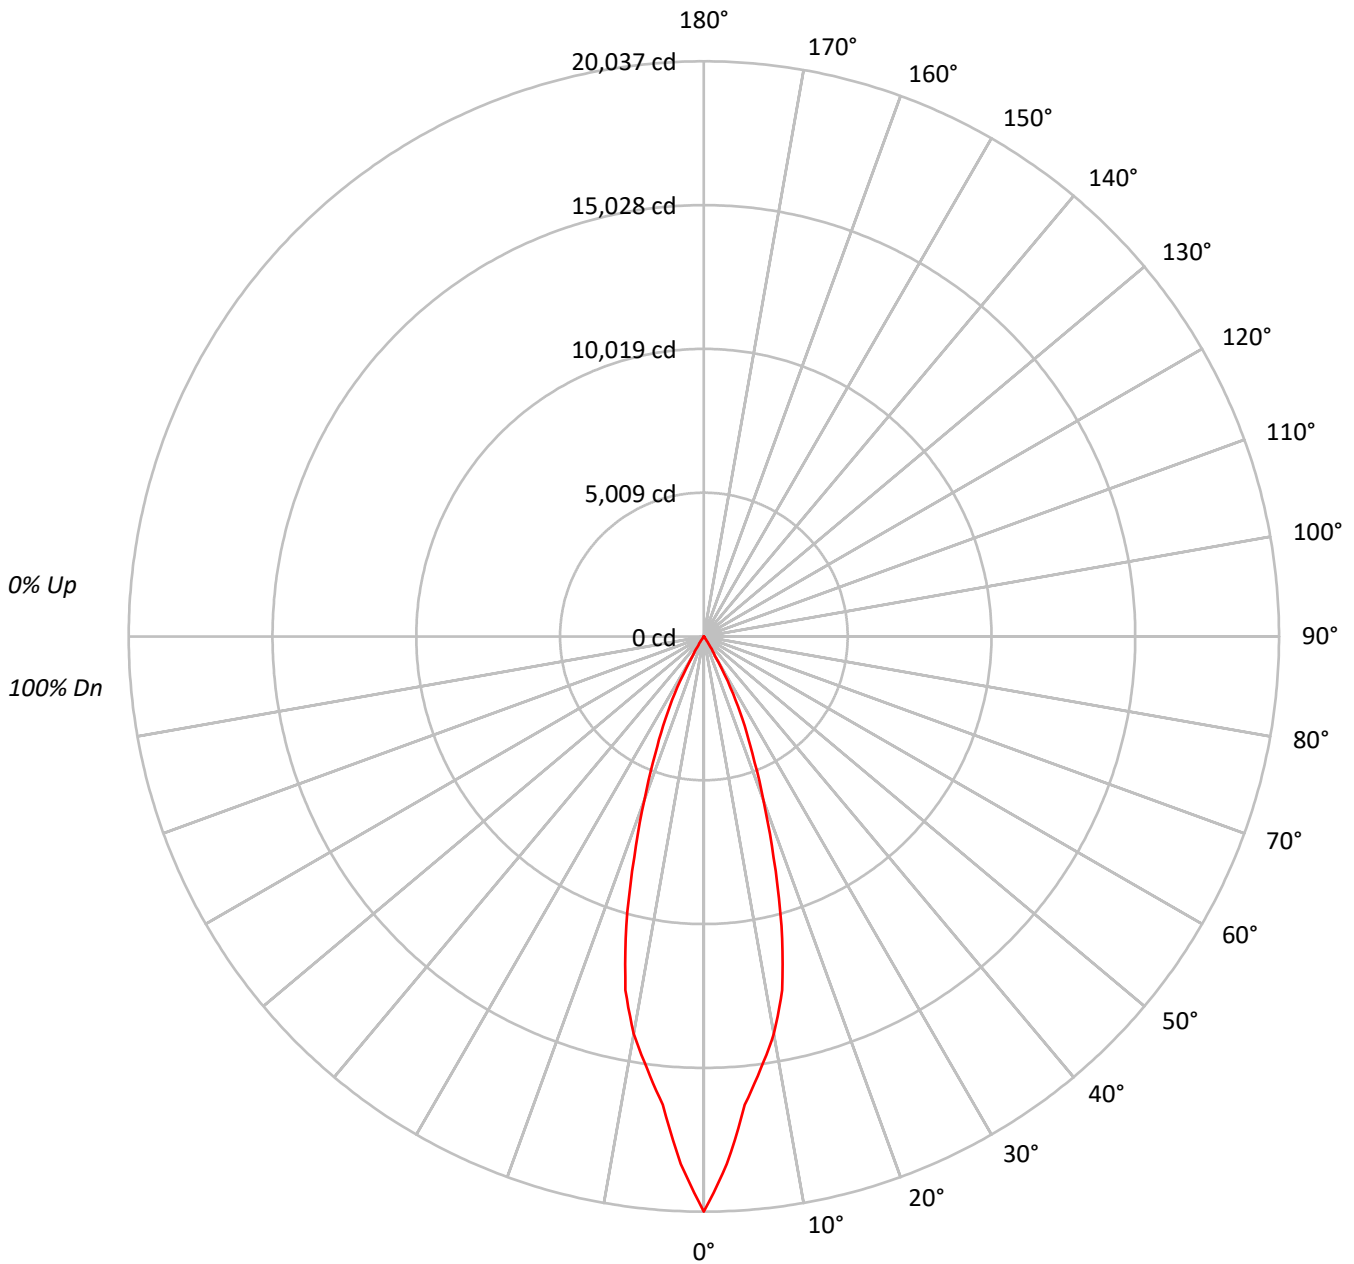



TEST NUMBER: P179758

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LAL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92			
3	107	102	98	95	105	101	97	94	98	95	93	96	94	92	94	92	90	89			
4	103	98	93	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86			
5	100	94	89	86	99	93	89	86	91	88	85	90	87	84	88	86	84	82			
6	97	90	86	82	95	89	85	82	88	84	82	87	84	81	86	83	81	80			
7	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72			
10	85	78	74	71	84	78	74	71	77	73	71	76	73	71	76	73	70	69			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1098410
5°	901219
10°	782317
15°	592552
20°	352160
25°	191842
30°	49552
35°	4631
40°	1961
45°	1016
50°	512
55°	803
60°	789
65°	623
70°	577
75°	508
80°	379
85°	0



TEST NUMBER: P179758

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LAL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1507.0	25.6
10°-20°	2796.2	47.5
20°-30°	1435.0	24.4
30°-40°	126.1	2.1
40°-50°	11.1	0.2
50°-60°	6.9	0.1
60°-70°	4.9	0.1
70°-80°	2.8	0.0
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5738.2	97.4
0°-40°	5864.3	99.6
0°-60°	5882.2	99.9
0°-90°	5890.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5890.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20037	
5°	16377	###
15°	10441	2796
25°	3172	1435
35°	69	126
45°	13	11
55°	8	7
65°	5	5
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P179758

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LAL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	20036.6
2.5°	18388.8
5°	16377.0
7.5°	15180.2
10°	14053.8
12.5°	12618.3
15°	10440.7
17.5°	8073.3
20°	6036.5
22.5°	4409.0
25°	3171.6
27.5°	2004.6
30°	782.8
32.5°	343.6
35°	69.2
37.5°	39.4
40°	27.4
42.5°	19.1
45°	13.1
47.5°	9.5
50°	6.0
52.5°	7.2
55°	8.4
57.5°	8.4
60°	7.2
62.5°	6.0
65°	4.8
67.5°	3.6
70°	3.6
72.5°	3.6
75°	2.4
77.5°	2.4
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)