

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179806

Luminaire Tested: **LDA6A65835D010TE LARH30NF 6LFC1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179806
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26682)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A65835D010TE LARH30NF 6LFC1H
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 30° Narrow Flood
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6430.9 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 78
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179806

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LFC1H

Luminous Intensity Polar Plot

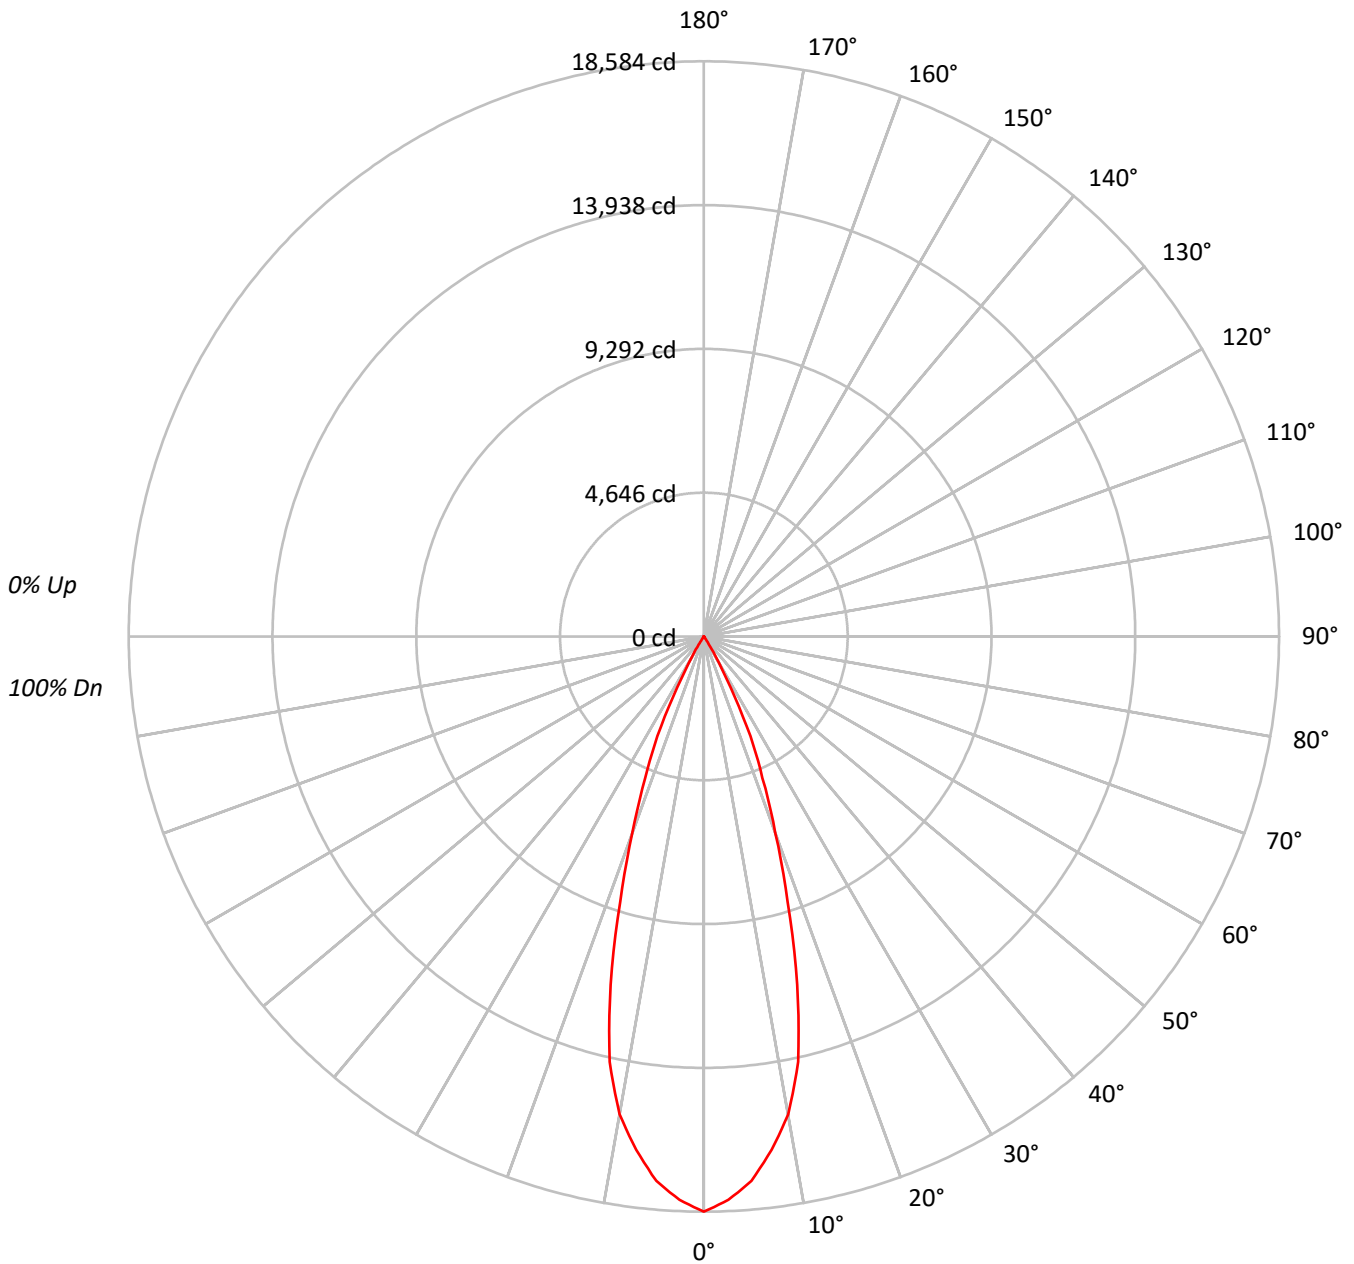



TEST NUMBER: P179806

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LFC1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	92			
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89			
4	103	98	94	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86			
5	100	94	89	86	99	93	89	86	91	88	85	90	87	84	88	86	84	83			
6	97	90	86	83	96	89	85	82	88	84	82	87	84	81	86	83	81	80			
7	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77			
8	91	84	79	76	90	83	79	76	82	79	76	81	78	76	81	78	75	74			
9	88	81	77	74	87	80	76	73	80	76	73	79	75	73	78	75	73	72			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	70			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1018756
5°	971701
10°	872752
15°	661014
20°	393189
25°	214839
30°	48862
35°	4631
40°	1875
45°	923
50°	614
55°	573
60°	395
65°	467
70°	385
75°	254
80°	379
85°	0



TEST NUMBER: P179806

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LFC1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1620.5	25.2
10°-20°	3119.0	48.5
20°-30°	1551.2	24.1
30°-40°	119.9	1.9
40°-50°	10.6	0.2
50°-60°	5.0	0.1
60°-70°	3.1	0.0
70°-80°	1.4	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6290.7	97.8
0°-40°	6410.6	99.7
0°-60°	6426.2	99.9
0°-90°	6430.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6430.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18584	
5°	17658	###
15°	11647	3119
25°	3552	1551
35°	69	120
45°	12	11
55°	6	5
65°	4	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179806

CATALOG NUMBER: LDA6A65835D010TE LARH30NF 6LFC1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	18583.6
2.5°	18216.1
5°	17657.8
7.5°	16728.4
10°	15678.4
12.5°	14082.1
15°	11647.0
17.5°	8994.7
20°	6739.8
22.5°	4944.2
25°	3551.8
27.5°	1861.2
30°	771.9
32.5°	306.6
35°	69.2
37.5°	40.6
40°	26.2
42.5°	17.9
45°	11.9
47.5°	9.5
50°	7.2
52.5°	6.0
55°	6.0
57.5°	4.8
60°	3.6
62.5°	3.6
65°	3.6
67.5°	2.4
70°	2.4
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)