

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179807

Luminaire Tested: **LDA6A65840D010TE LARH30NF 6LFC1H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P179807  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26682)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA6A65840D010TE LARH30NF 6LFC1H  
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 30° Narrow Flood  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6599.9 lumens  
Efficiency: N/A  
Efficacy: 84.6 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 78  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P179807

CATALOG NUMBER: LDA6A65840D010TE LARH30NF 6LFC1H

### Luminous Intensity Polar Plot

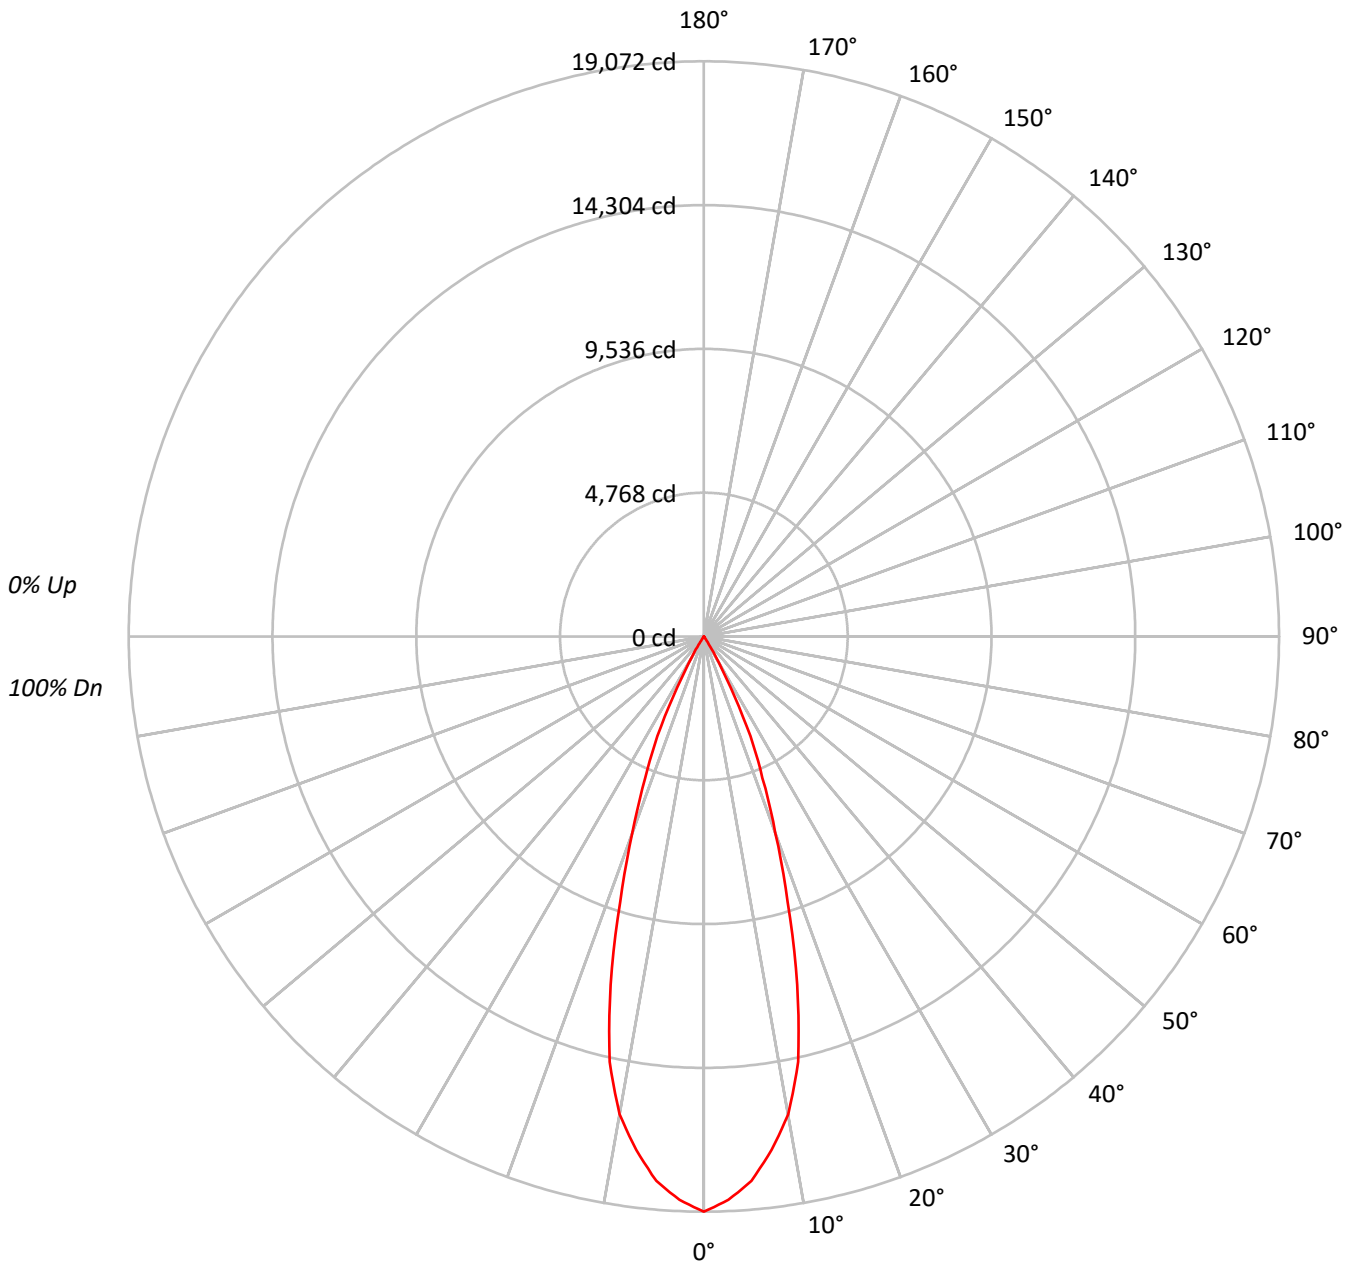



TEST NUMBER: P179807

CATALOG NUMBER: LDA6A65840D010TE LARH30NF 6LFC1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	92			
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89			
4	103	98	94	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86			
5	100	94	89	86	99	93	89	86	91	88	85	90	87	84	88	86	84	83			
6	97	90	86	83	96	89	85	82	88	84	82	87	84	81	86	83	81	80			
7	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77			
8	91	84	79	76	90	83	79	76	82	79	76	81	78	76	81	78	75	74			
9	88	81	77	74	87	80	76	73	80	76	73	79	75	73	78	75	73	72			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	70			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1045541
5°	997246
10°	895703
15°	678392
20°	403527
25°	220489
30°	50147
35°	4752
40°	1925
45°	946
50°	623
55°	583
60°	406
65°	480
70°	385
75°	254
80°	379
85°	0



TEST NUMBER: P179807

CATALOG NUMBER: LDA6A65840D010TE LARH30NF 6LFC1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1663.1	25.2
10°-20°	3201.0	48.5
20°-30°	1592.0	24.1
30°-40°	123.1	1.9
40°-50°	10.9	0.2
50°-60°	5.0	0.1
60°-70°	3.2	0.0
70°-80°	1.4	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6456.1	97.8
0°-40°	6579.1	99.7
0°-60°	6595.1	99.9
0°-90°	6599.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6599.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	19072	
5°	18122	###
15°	11953	3201
25°	3645	1592
35°	71	123
45°	12	11
55°	6	5
65°	4	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179807

CATALOG NUMBER: LDA6A65840D010TE LARH30NF 6LFC1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	19072.2
2.5°	18695.1
5°	18122.0
7.5°	17168.2
10°	16090.7
12.5°	14452.3
15°	11953.2
17.5°	9231.2
20°	6917.0
22.5°	5074.2
25°	3645.2
27.5°	1910.2
30°	792.2
32.5°	314.7
35°	71.0
37.5°	41.6
40°	26.9
42.5°	18.4
45°	12.2
47.5°	9.8
50°	7.3
52.5°	6.1
55°	6.1
57.5°	4.9
60°	3.7
62.5°	3.7
65°	3.7
67.5°	2.4
70°	2.4
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)