

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204245

Luminaire Tested: **LE_6B10D010 EC6B10209024 6LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204245
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209024 6LBSWH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1005.0 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204245

CATALOG NUMBER: LE_6B10D010 EC6B10209024 6LBSWH1

Luminous Intensity Polar Plot

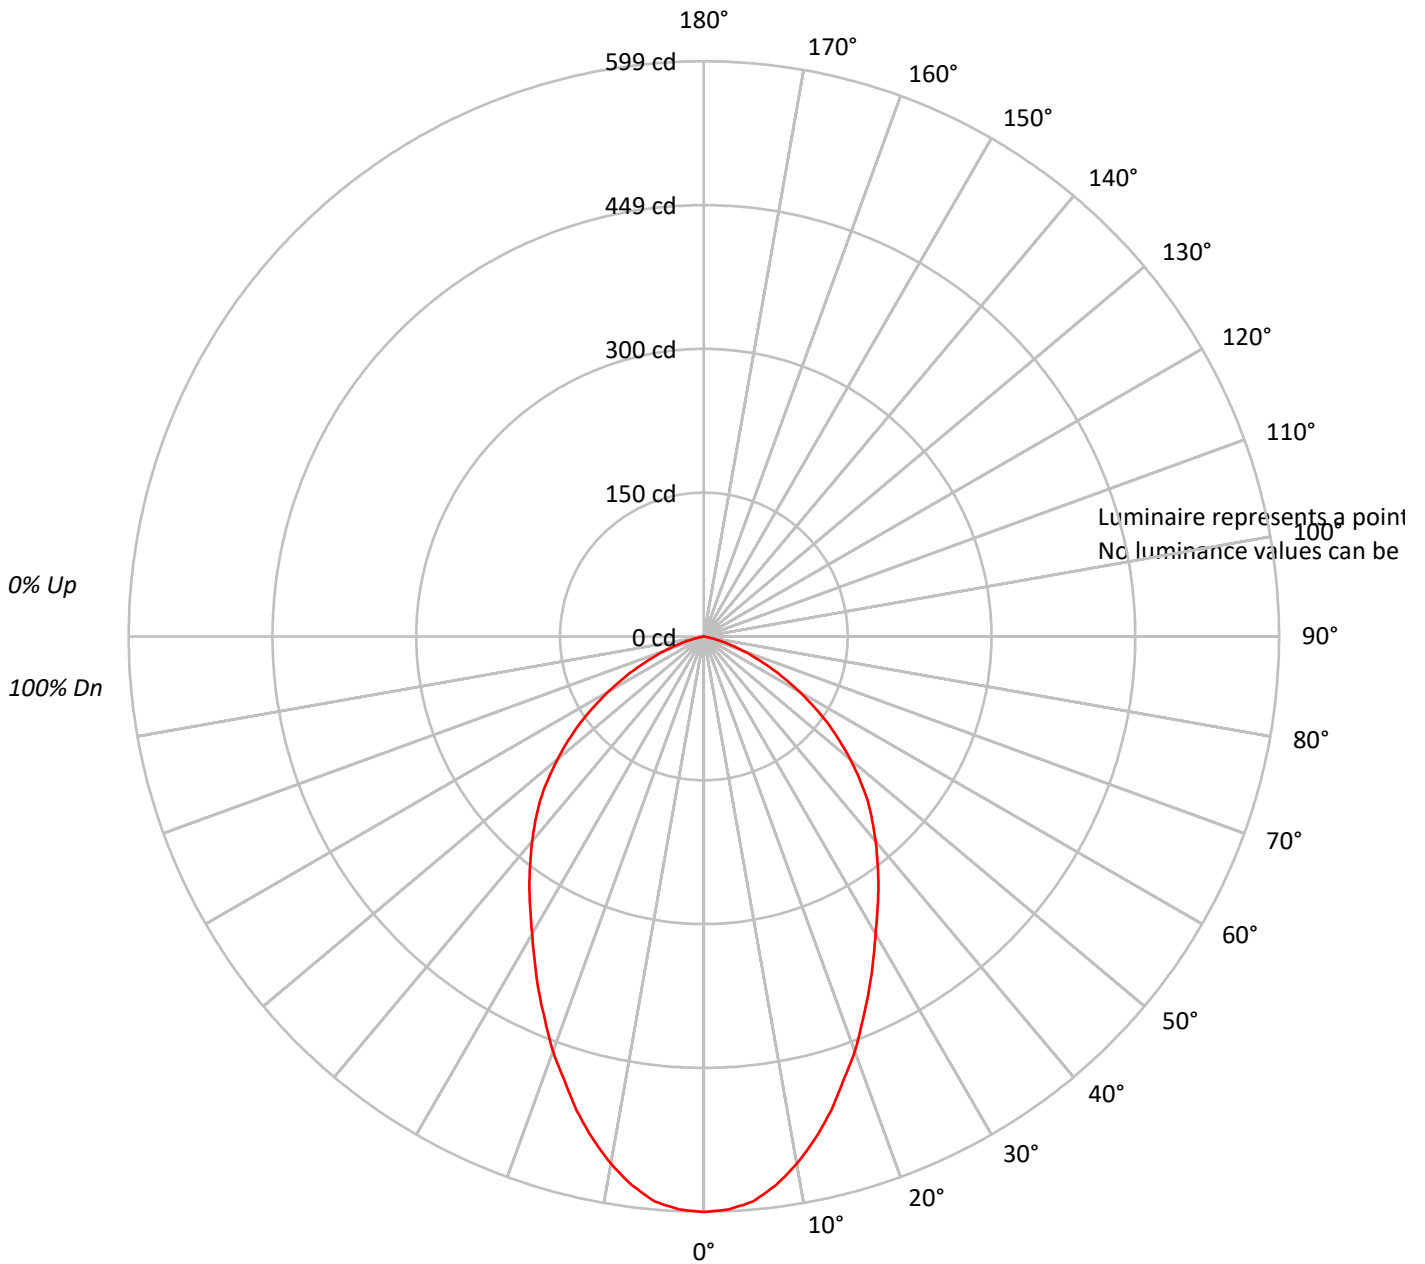



TEST NUMBER: P204245

CATALOG NUMBER: LE_6B10D010 EC6B10209024 6LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89				89
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77				77
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67				67
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59				59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47				47
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42				42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38				38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35				35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32				32

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204245

CATALOG NUMBER: LE_6B10D010 EC6B10209024 6LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.3	5.5
10°-20°	143.1	14.2
20°-30°	187.2	18.6
30°-40°	198.2	19.7
40°-50°	184.8	18.4
50°-60°	140.0	13.9
60°-70°	75.8	7.5
70°-80°	20.4	2.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	385.5	38.4
0°-40°	583.7	58.1
0°-60°	908.5	90.4
0°-90°	1005.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1005.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	599	
5°	591	55
15°	511	143
25°	407	187
35°	317	198
45°	241	185
55°	157	140
65°	76	76
75°	18	20
85°	0	0
90°	0	



TEST NUMBER: P204245

CATALOG NUMBER: LE_6B10D010 EC6B10209024 6LBSWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	599.4
2.5°	597.2
5°	590.6
7.5°	576.2
10°	557.6
12.5°	535.6
15°	511.4
17.5°	483.9
20°	459.8
22.5°	432.2
25°	406.9
27.5°	381.6
30°	357.4
32.5°	336.5
35°	316.8
37.5°	297.0
40°	278.2
42.5°	259.5
45°	240.9
47.5°	220.0
50°	199.1
52.5°	178.1
55°	157.2
57.5°	135.2
60°	114.4
62.5°	94.6
65°	75.9
67.5°	58.2
70°	42.9
72.5°	29.8
75°	17.6
77.5°	7.8
80°	2.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)