

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203313

Luminaire Tested: **LE\_6B10D010 EC6B10208027 6LBMWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203313  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B10D010 EC6B10208027 6LBMWH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1003.4 lumens  
Efficiency: N/A  
Efficacy: 101.4 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203313

CATALOG NUMBER: LE\_6B10D010 EC6B10208027 6LBMWH1

### Luminous Intensity Polar Plot

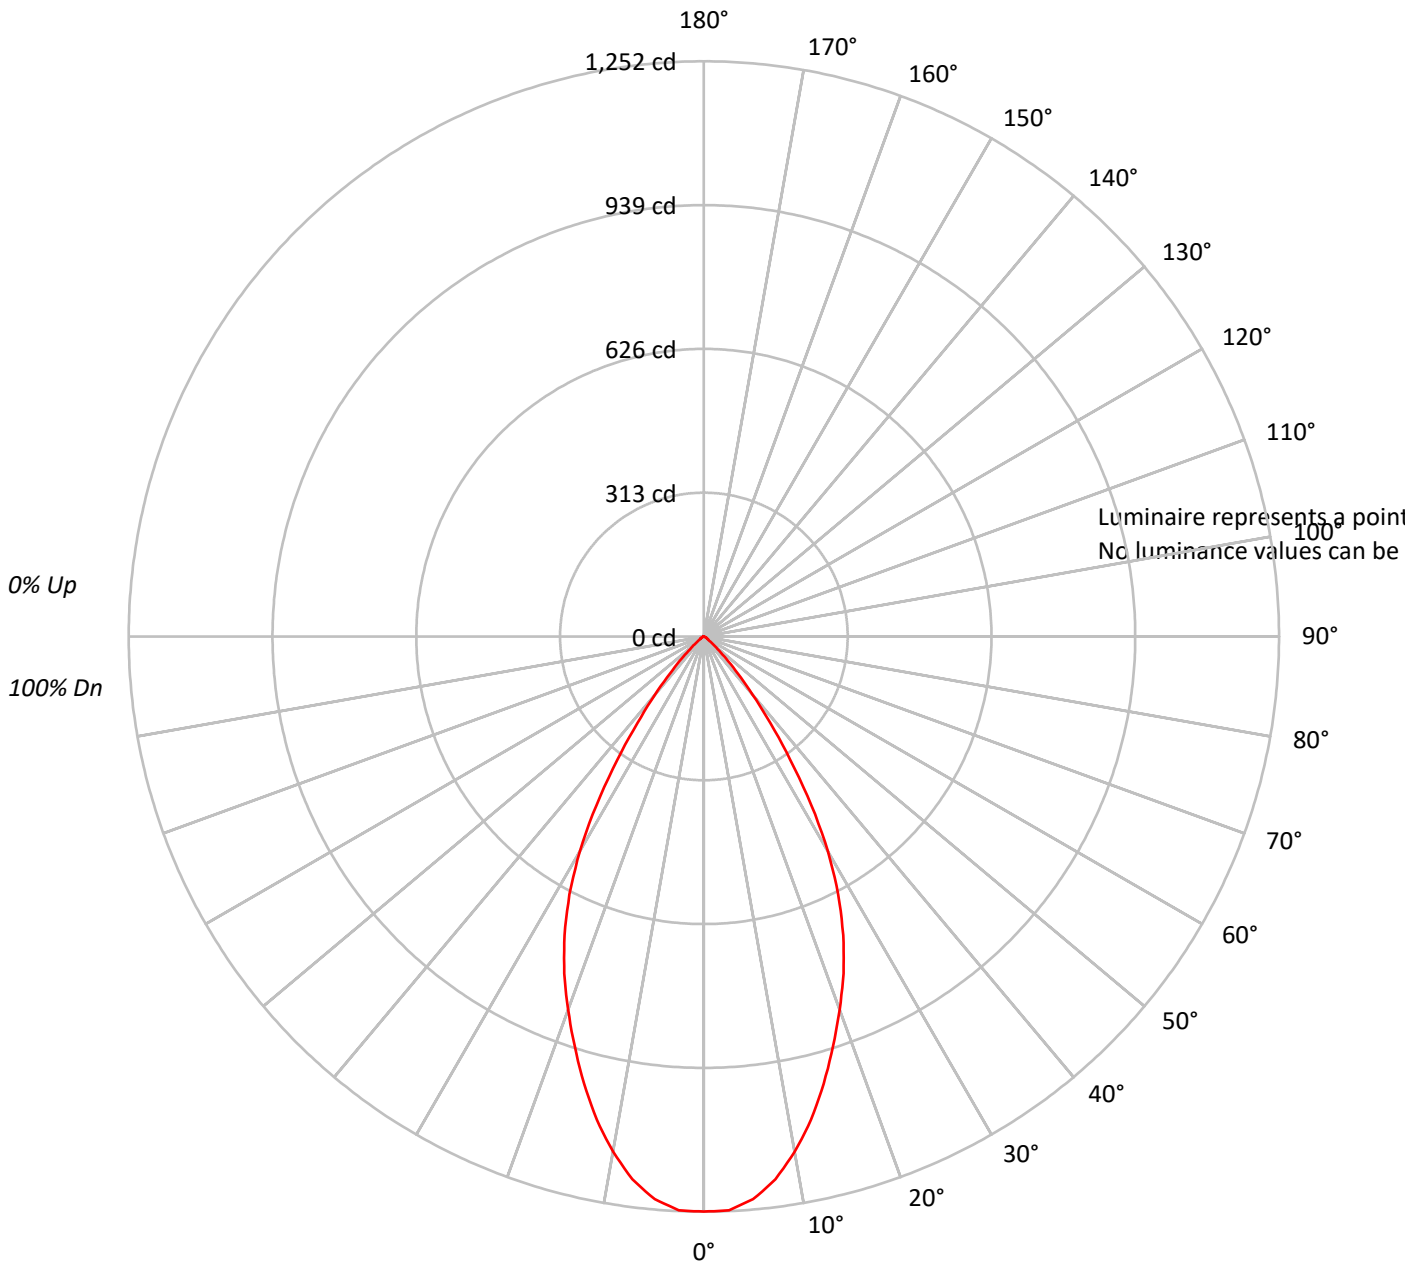



TEST NUMBER: P203313

CATALOG NUMBER: LE\_6B10D010 EC6B10208027 6LBMWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58			
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55			
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203313

CATALOG NUMBER: LE\_6B10D010 EC6B10208027 6LBMWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	114.4	11.4
10°-20°	280.9	28.0
20°-30°	325.0	32.4
30°-40°	207.8	20.7
40°-50°	58.9	5.9
50°-60°	10.6	1.1
60°-70°	4.3	0.4
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	720.4	71.8
0°-40°	928.1	92.5
0°-60°	997.6	99.4
0°-90°	1003.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1003.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1252	
5°	1229	114
15°	1008	281
25°	717	325
35°	328	208
45°	68	59
55°	10	11
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P203313

CATALOG NUMBER: LE\_6B10D010 EC6B10208027 6LBMWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1251.8
2.5°	1250.2
5°	1229.4
7.5°	1191.8
10°	1138.6
12.5°	1077.2
15°	1007.5
17.5°	935.0
20°	863.8
22.5°	794.0
25°	717.2
27.5°	633.5
30°	540.0
32.5°	435.4
35°	327.9
37.5°	237.2
40°	164.6
42.5°	108.9
45°	68.4
47.5°	40.5
50°	23.8
52.5°	14.0
55°	9.8
57.5°	8.4
60°	7.0
62.5°	5.6
65°	4.1
67.5°	2.8
70°	2.8
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)