

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202592

Luminaire Tested: **LE_6B10D010 EC6B10208027 6LBMWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202592
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10208027 6LBMWMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 997.2 lumens
Efficiency: N/A
Efficacy: 100.7 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202592

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMWMH1

Luminous Intensity Polar Plot

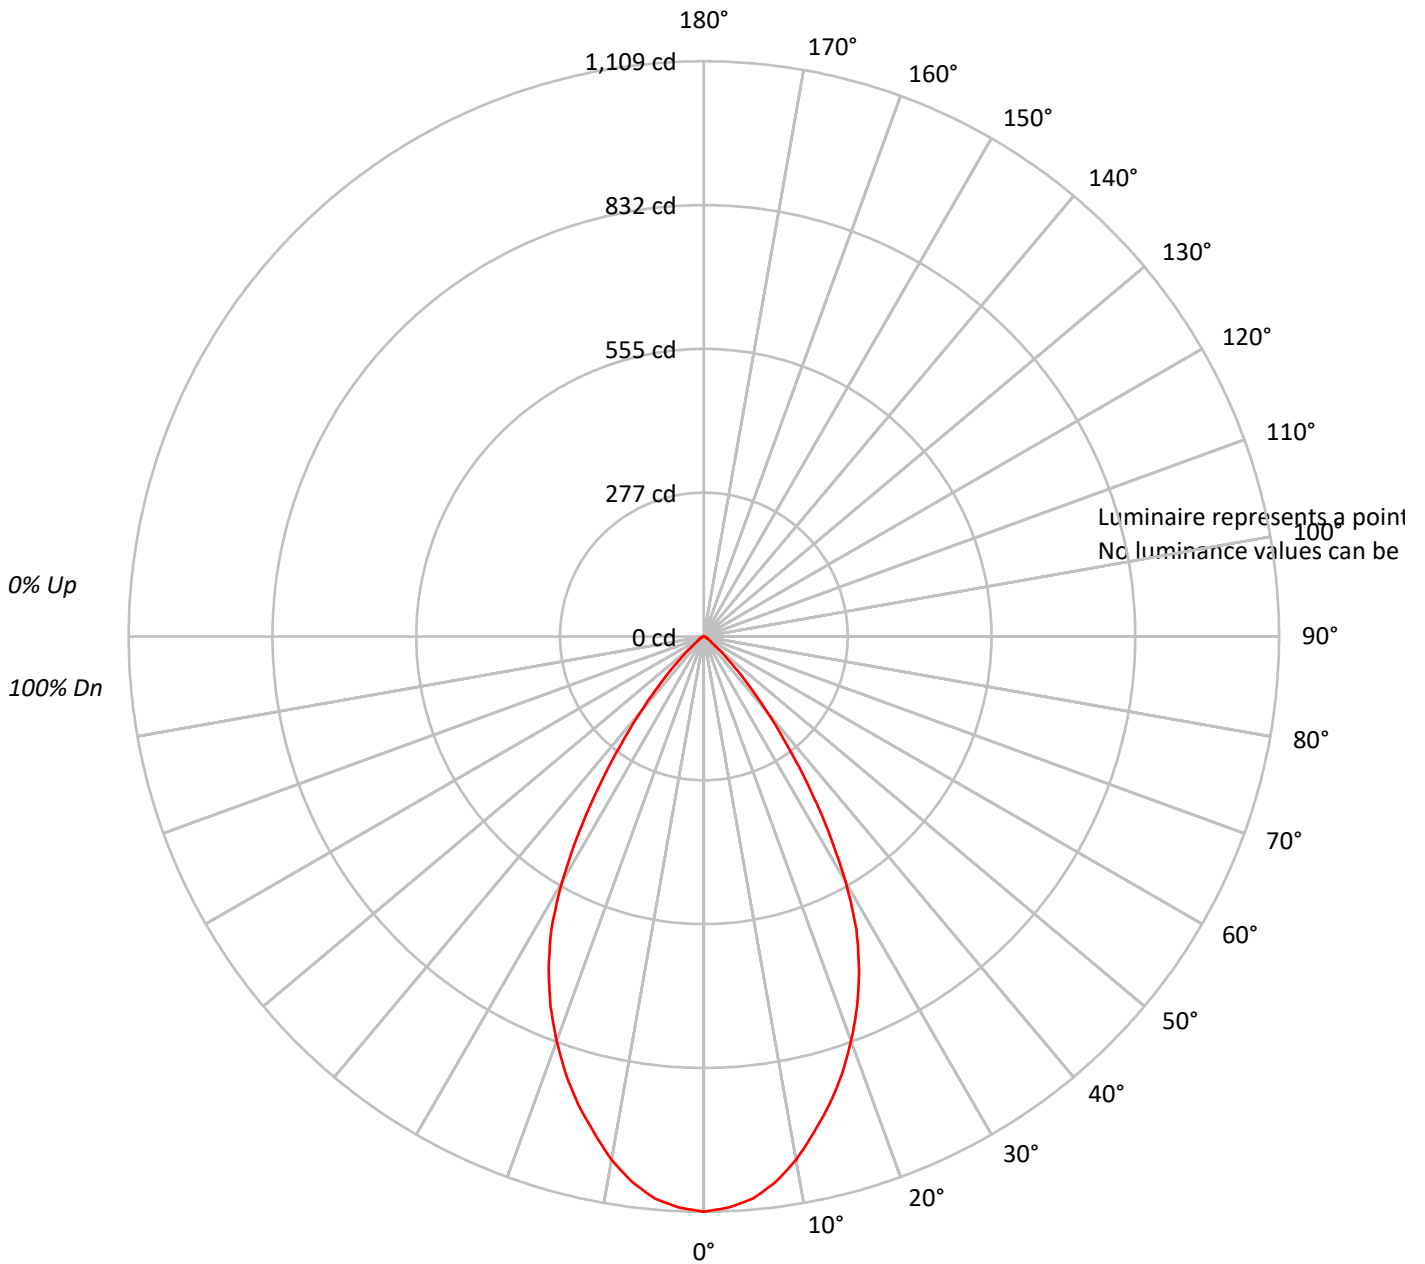



TEST NUMBER: P202592

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69			
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64			
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202592

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.8	10.2
10°-20°	261.3	26.2
20°-30°	320.9	32.2
30°-40°	220.0	22.1
40°-50°	70.7	7.1
50°-60°	14.3	1.4
60°-70°	5.6	0.6
70°-80°	2.2	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	683.9	68.6
0°-40°	904.0	90.6
0°-60°	989.0	99.2
0°-90°	997.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	997.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1109	
5°	1088	102
15°	935	261
25°	708	321
35°	351	220
45°	84	71
55°	14	14
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P202592

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1108.9
2.5°	1102.1
5°	1087.8
7.5°	1060.8
10°	1024.4
12.5°	979.5
15°	934.6
17.5°	884.8
20°	829.8
22.5°	772.2
25°	708.0
27.5°	636.9
30°	547.2
32.5°	448.2
35°	351.0
37.5°	262.2
40°	188.6
42.5°	128.6
45°	83.8
47.5°	51.6
50°	31.2
52.5°	19.5
55°	14.4
57.5°	11.0
60°	8.5
62.5°	6.8
65°	5.9
67.5°	4.2
70°	3.4
72.5°	2.5
75°	1.8
77.5°	1.8
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)