

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P35128

Luminaire Tested: **LE_6B10D010 EC6B10209027 6LBMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P35128
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209027 6LBMB1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 483.6 lumens
Efficiency: N/A
Efficacy: 49.9 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.86
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 9.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P35128
CATALOG NUMBER: LE_6B10D010 EC6B10209027 6LBMB1

Luminous Intensity Polar Plot

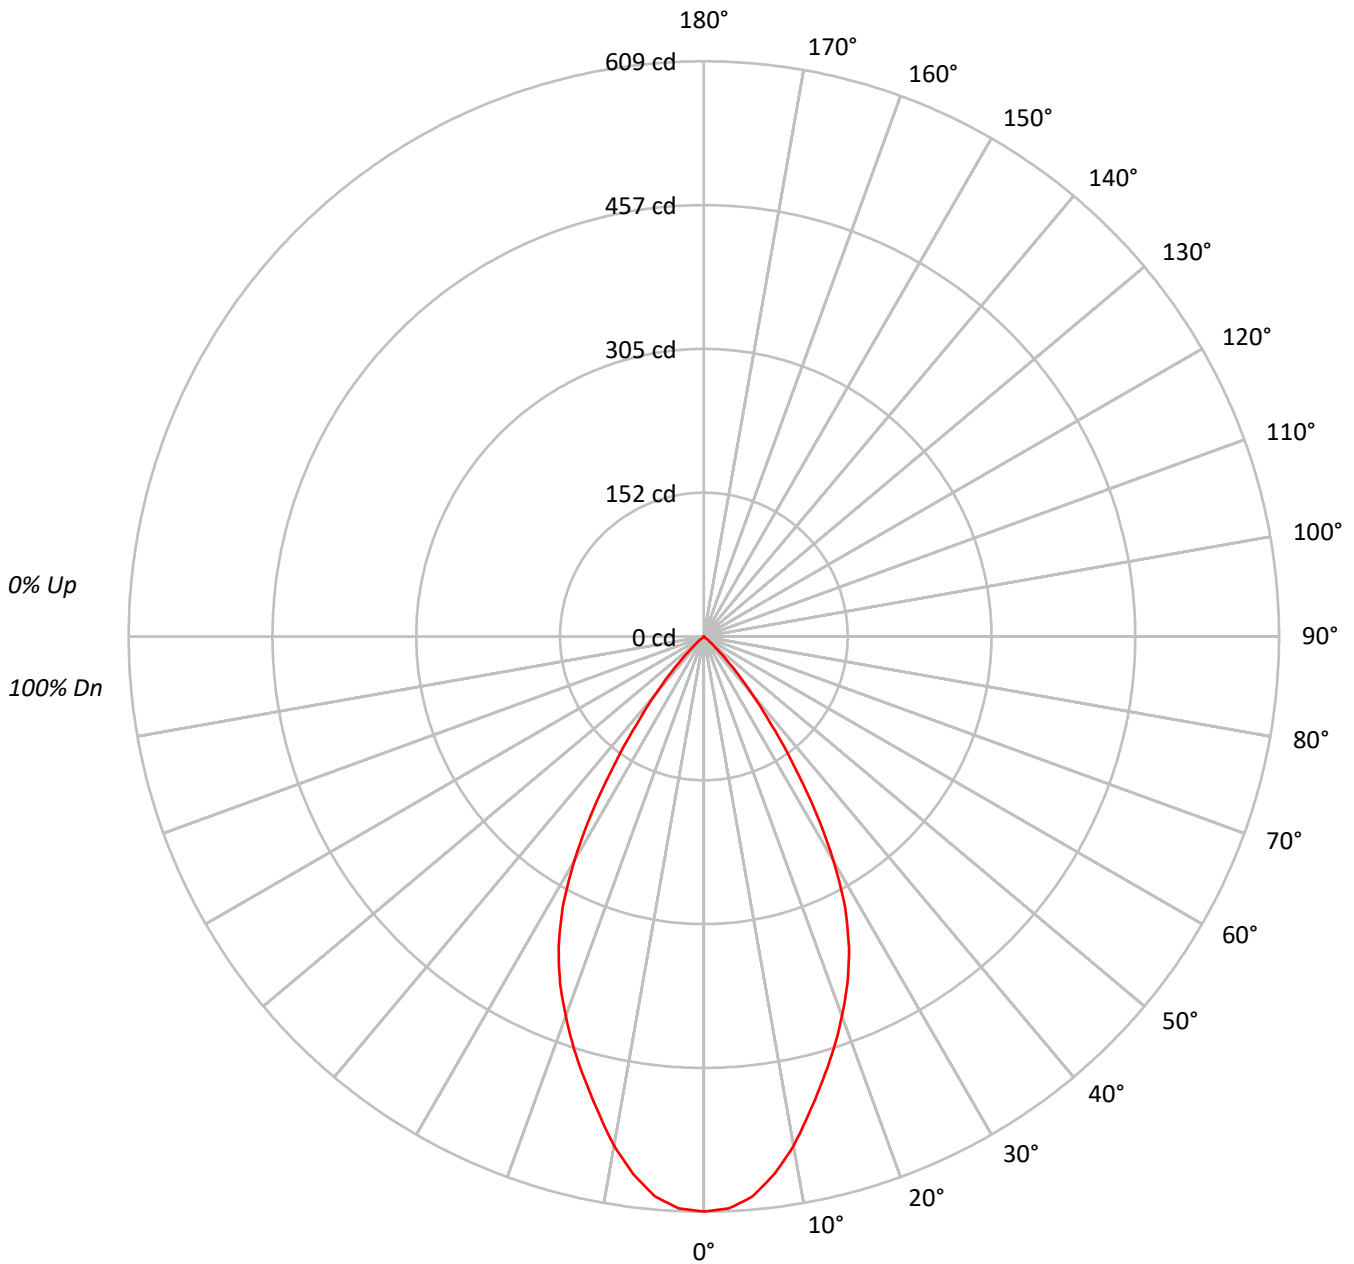



TEST NUMBER: P35128

CATALOG NUMBER: LE_6B10D010 EC6B10209027 6LBMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82			
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	76			
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	65	71	67	64	63			
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59			
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39718
5°	38966
10°	36270
15°	32839
20°	29680
25°	26188
30°	20717
35°	13046
40°	6711
45°	2417
50°	254
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P35128

CATALOG NUMBER: LE_6B10D010 EC6B10209027 6LBMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.2	11.4
10°-20°	136.3	28.2
20°-30°	164.2	34.0
30°-40°	103.8	21.5
40°-50°	23.8	4.9
50°-60°	0.3	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	355.7	73.6
0°-40°	459.5	95.0
0°-60°	483.6	100.0
0°-90°	483.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	483.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	609	
5°	595	55
15°	486	136
25°	364	164
35°	164	104
45°	26	24
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P35128

CATALOG NUMBER: LE_6B10D010 EC6B10209027 6LBMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	608.8
2.5°	606.2
5°	595.0
7.5°	573.8
10°	547.5
12.5°	516.2
15°	486.2
17.5°	457.5
20°	427.5
22.5°	397.5
25°	363.8
27.5°	323.8
30°	275.0
32.5°	220.0
35°	163.8
37.5°	116.2
40°	78.8
42.5°	48.8
45°	26.2
47.5°	11.2
50°	2.5
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)