

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202808

Luminaire Tested: **LE\_6B10D010 EC6B10209727 6LBWWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202808  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B10D010 EC6B10209727 6LBWWH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 867.4 lumens  
Efficiency: N/A  
Efficacy: 87.6 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202808

CATALOG NUMBER: LE\_6B10D010 EC6B10209727 6LBWWH1

### Luminous Intensity Polar Plot

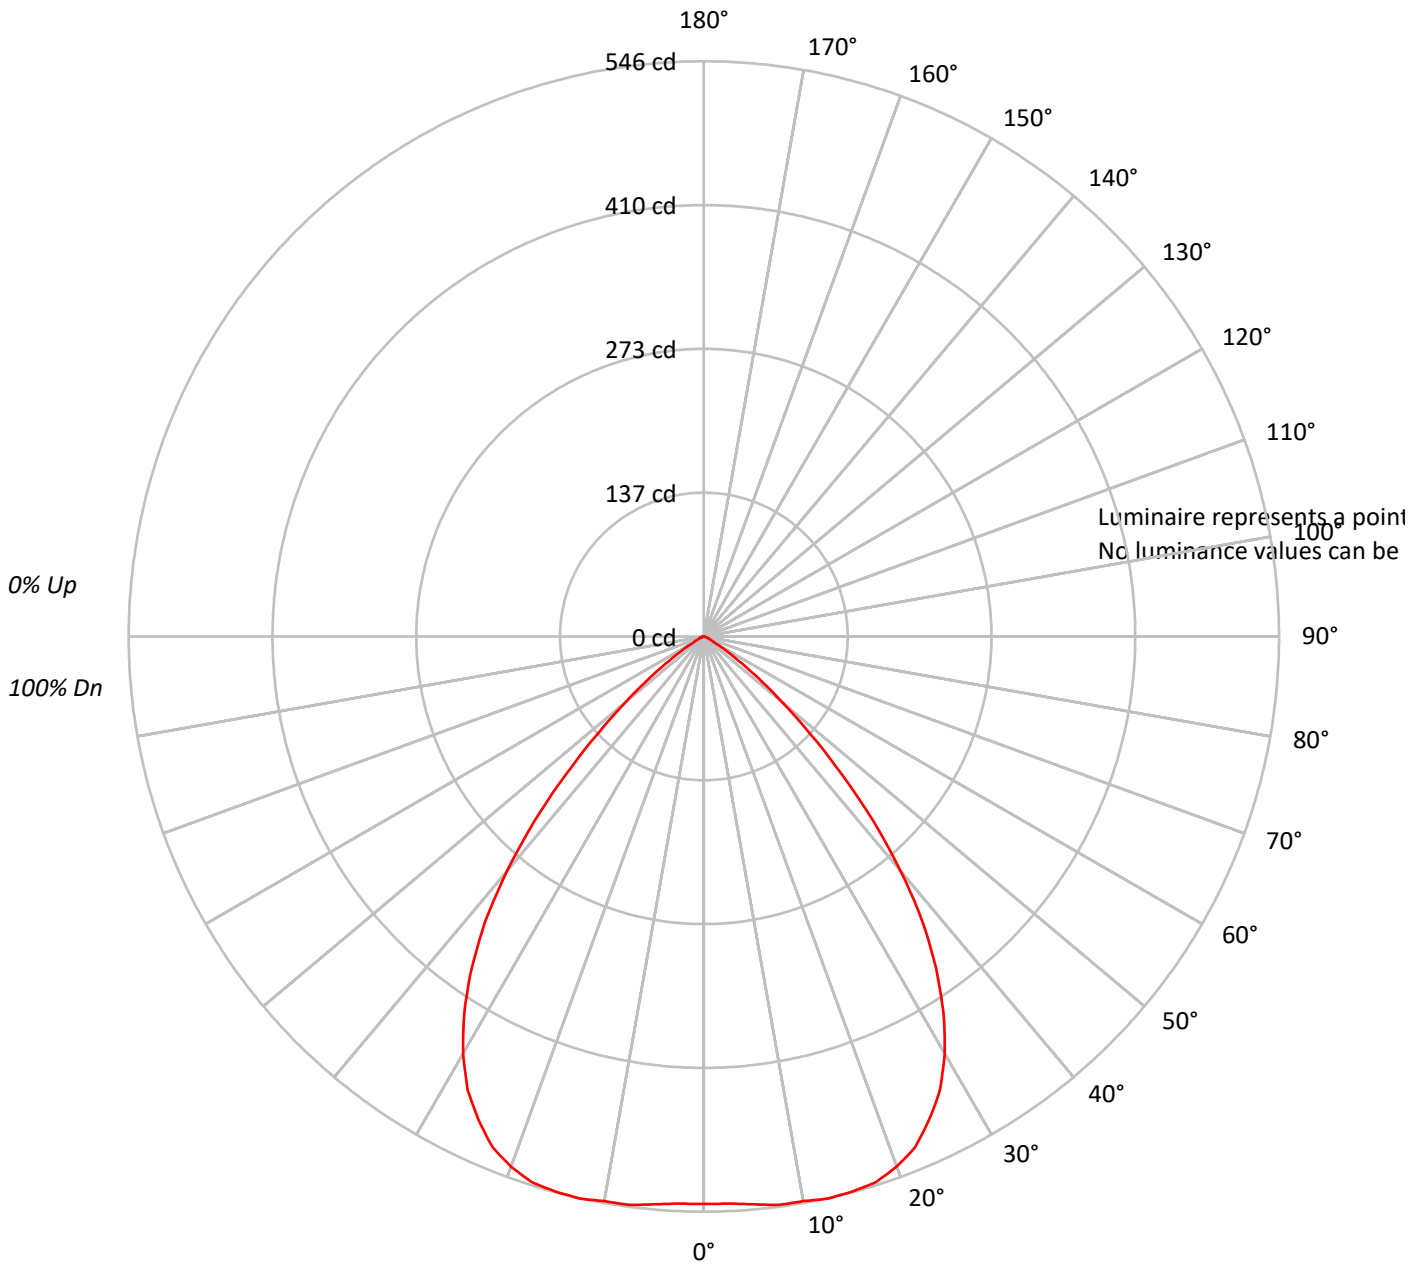



TEST NUMBER: P202808

CATALOG NUMBER: LE\_6B10D010 EC6B10209727 6LBWWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	71	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202808

CATALOG NUMBER: LE\_6B10D010 EC6B10209727 6LBWWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.8	6.0
10°-20°	154.0	17.8
20°-30°	231.8	26.7
30°-40°	237.0	27.3
40°-50°	143.9	16.6
50°-60°	40.5	4.7
60°-70°	6.2	0.7
70°-80°	2.0	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	437.6	50.5
0°-40°	674.7	77.8
0°-60°	859.1	99.0
0°-90°	867.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	867.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	539	
5°	541	52
15°	545	154
25°	506	232
35°	384	237
45°	185	144
55°	40	41
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P202808

CATALOG NUMBER: LE\_6B10D010 EC6B10209727 6LBWWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	538.8
2.5°	538.8
5°	541.0
7.5°	544.2
10°	544.2
12.5°	546.4
15°	545.4
17.5°	543.1
20°	535.5
22.5°	524.6
25°	506.1
27.5°	485.5
30°	457.1
32.5°	423.4
35°	384.2
37.5°	340.8
40°	290.6
42.5°	238.4
45°	185.0
47.5°	137.1
50°	96.9
52.5°	65.2
55°	40.2
57.5°	24.0
60°	12.0
62.5°	7.6
65°	5.5
67.5°	4.4
70°	3.2
72.5°	2.1
75°	2.1
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)