

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204660

Luminaire Tested: **LE_6B10D010 EC6B10209030 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204660
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209030 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1232.6 lumens
Efficiency: N/A
Efficacy: 124.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204660

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBPSMW1

Luminous Intensity Polar Plot

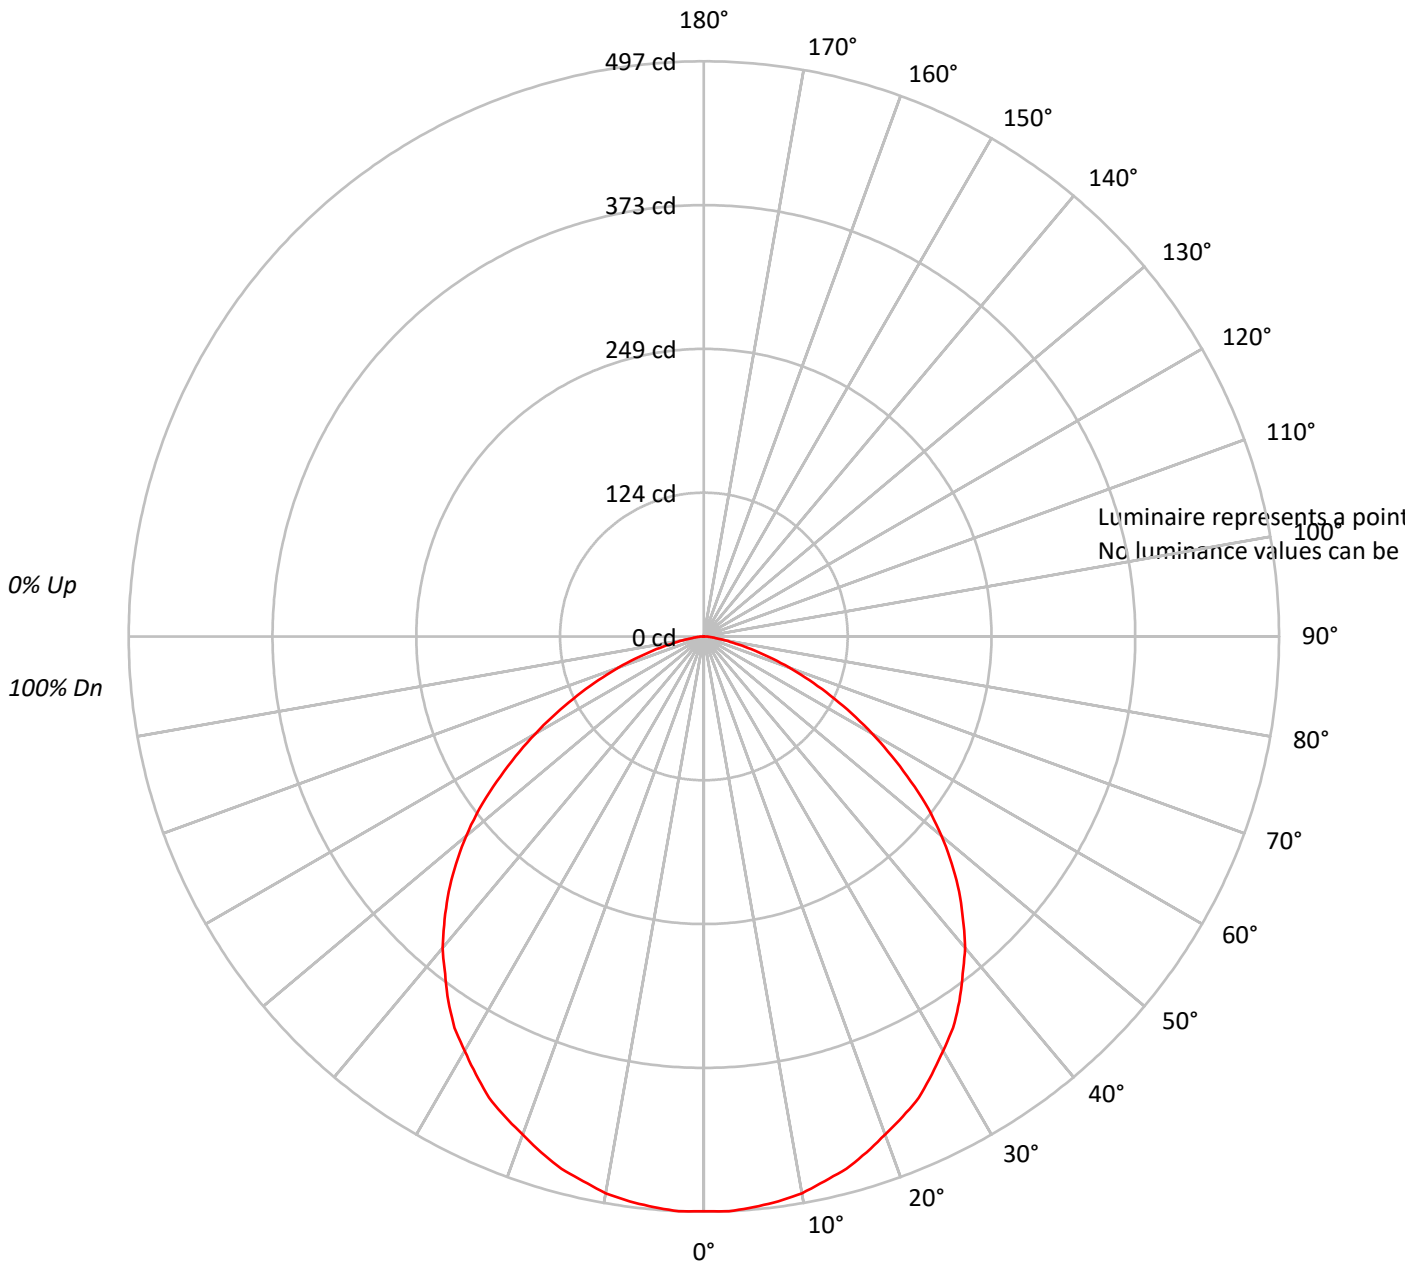



TEST NUMBER: P204660

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204660

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.0	3.8
10°-20°	134.1	10.9
20°-30°	202.0	16.4
30°-40°	240.4	19.5
40°-50°	239.9	19.5
50°-60°	195.1	15.8
60°-70°	120.0	9.7
70°-80°	46.5	3.8
80°-90°	7.5	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	383.2	31.1
0°-40°	623.5	50.6
0°-60°	1058.5	85.9
0°-90°	1232.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1232.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	497	
5°	495	47
15°	476	134
25°	440	202
35°	385	240
45°	312	240
55°	218	195
65°	120	120
75°	42	47
85°	6	7
90°	0	



TEST NUMBER: P204660

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	496.6
2.5°	497.2
5°	495.1
7.5°	492.2
10°	488.5
12.5°	482.0
15°	476.1
17.5°	467.4
20°	457.9
22.5°	449.1
25°	439.6
27.5°	426.5
30°	413.4
32.5°	400.9
35°	384.9
37.5°	367.4
40°	351.2
42.5°	331.5
45°	311.9
47.5°	290.6
50°	268.0
52.5°	244.6
55°	218.4
57.5°	192.8
60°	168.0
62.5°	143.9
65°	120.5
67.5°	98.6
70°	78.1
72.5°	59.1
75°	42.4
77.5°	27.8
80°	16.8
82.5°	10.2
85°	5.9
87.5°	2.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)