

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202496

Luminaire Tested: **LE_6B10D010 EC6B10209030 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202496
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209030 6LBSWMH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1192.6 lumens
Efficiency: N/A
Efficacy: 120.5 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202496

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBSWMH1

Luminous Intensity Polar Plot

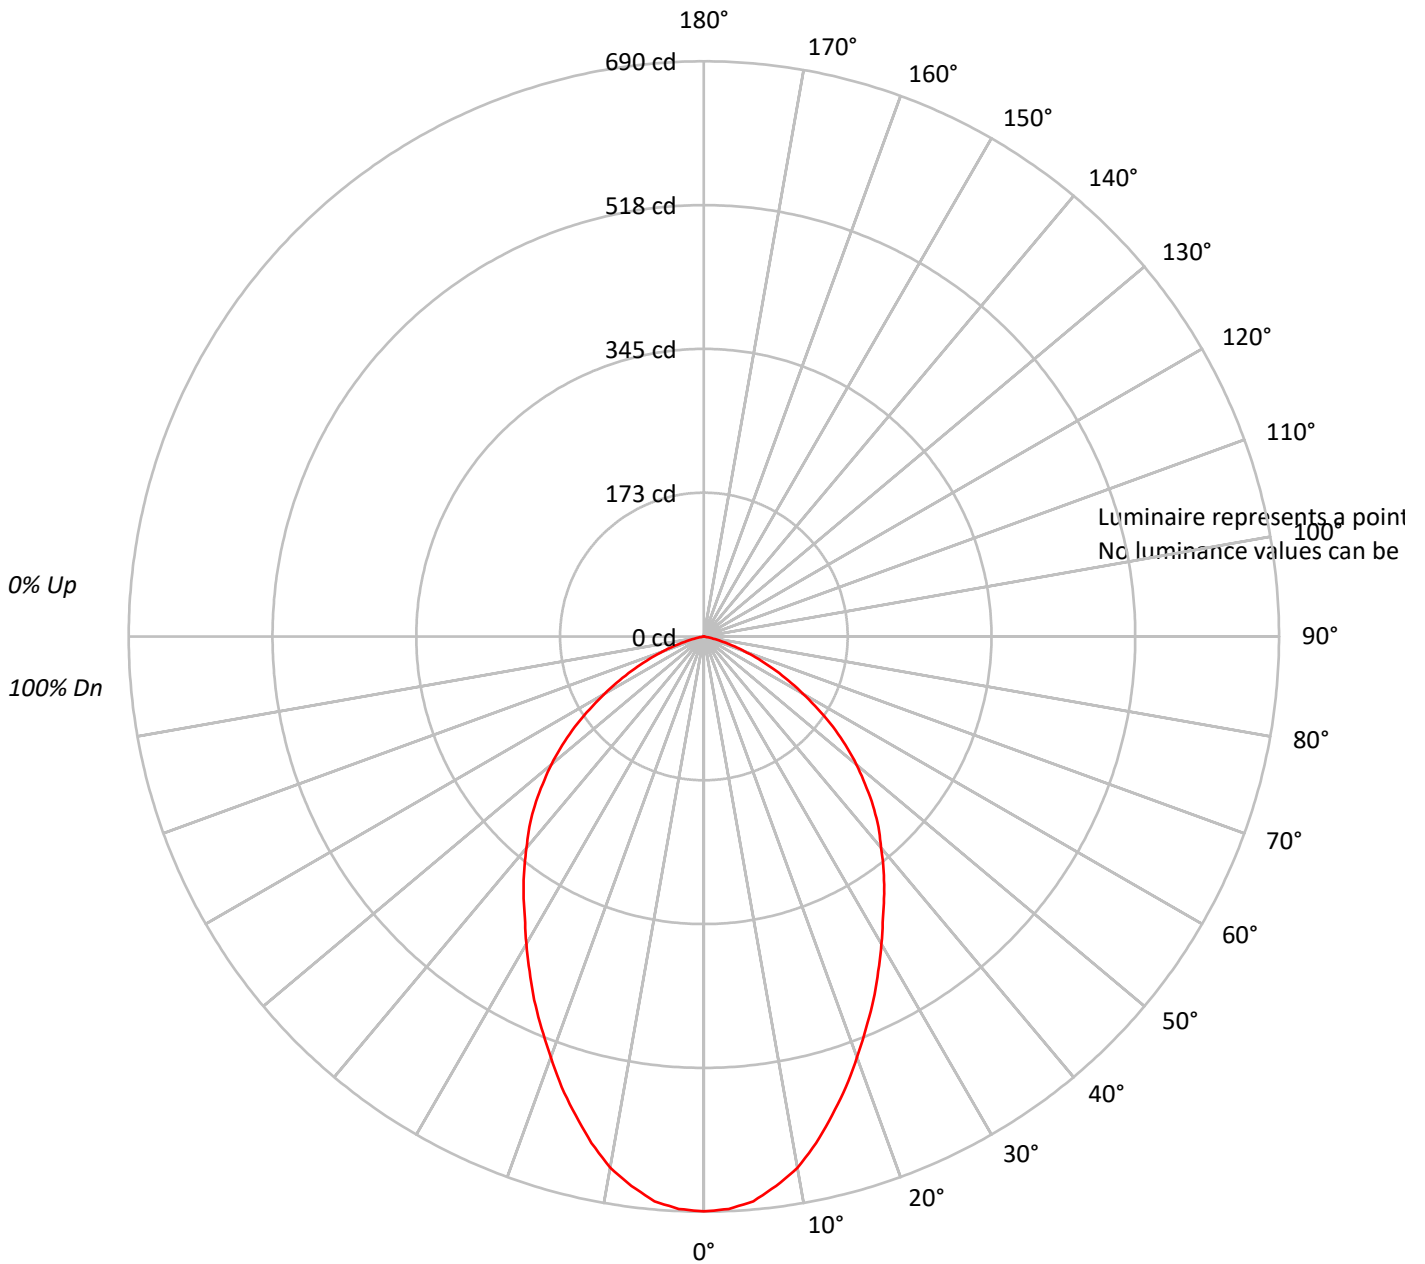



TEST NUMBER: P202496

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	81	79	77			
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67			
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59			
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52			
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47			
7	70	58	50	45	69	57	50	45	56	49	44	55	48	44	53	48	44	42			
8	66	54	46	40	64	53	45	40	52	45	40	50	44	40	49	44	40	38			
9	62	49	42	37	61	49	42	37	48	41	37	47	41	36	46	40	36	35			
10	58	46	39	34	57	45	38	34	45	38	34	44	38	33	43	37	33	32			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202496

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBSWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.8	5.3
10°-20°	166.8	14.0
20°-30°	221.2	18.5
30°-40°	235.9	19.8
40°-50°	220.5	18.5
50°-60°	168.1	14.1
60°-70°	91.5	7.7
70°-80°	24.5	2.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	451.7	37.9
0°-40°	687.6	57.7
0°-60°	1076.2	90.2
0°-90°	1192.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1192.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	690	
5°	680	64
15°	595	167
25°	481	221
35°	377	236
45°	287	221
55°	189	168
65°	91	92
75°	21	25
85°	0	0
90°	0	



TEST NUMBER: P202496

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	689.6
2.5°	687.4
5°	680.1
7.5°	664.8
10°	647.2
12.5°	622.4
15°	594.6
17.5°	566.9
20°	537.0
22.5°	508.5
25°	481.4
27.5°	452.9
30°	425.9
32.5°	399.6
35°	377.0
37.5°	354.2
40°	330.9
42.5°	309.8
45°	287.1
47.5°	262.2
50°	238.9
52.5°	214.0
55°	189.2
57.5°	162.1
60°	137.4
62.5°	114.0
65°	91.4
67.5°	70.9
70°	51.9
72.5°	35.8
75°	21.1
77.5°	9.5
80°	2.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)