

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202701

Luminaire Tested: **LE\_6B10D010 EC6B10209030 6LBWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202701  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B10D010 EC6B10209030 6LBWH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1003.6 lumens  
Efficiency: N/A  
Efficacy: 101.4 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202701

CATALOG NUMBER: LE\_6B10D010 EC6B10209030 6LBWH1

### Luminous Intensity Polar Plot

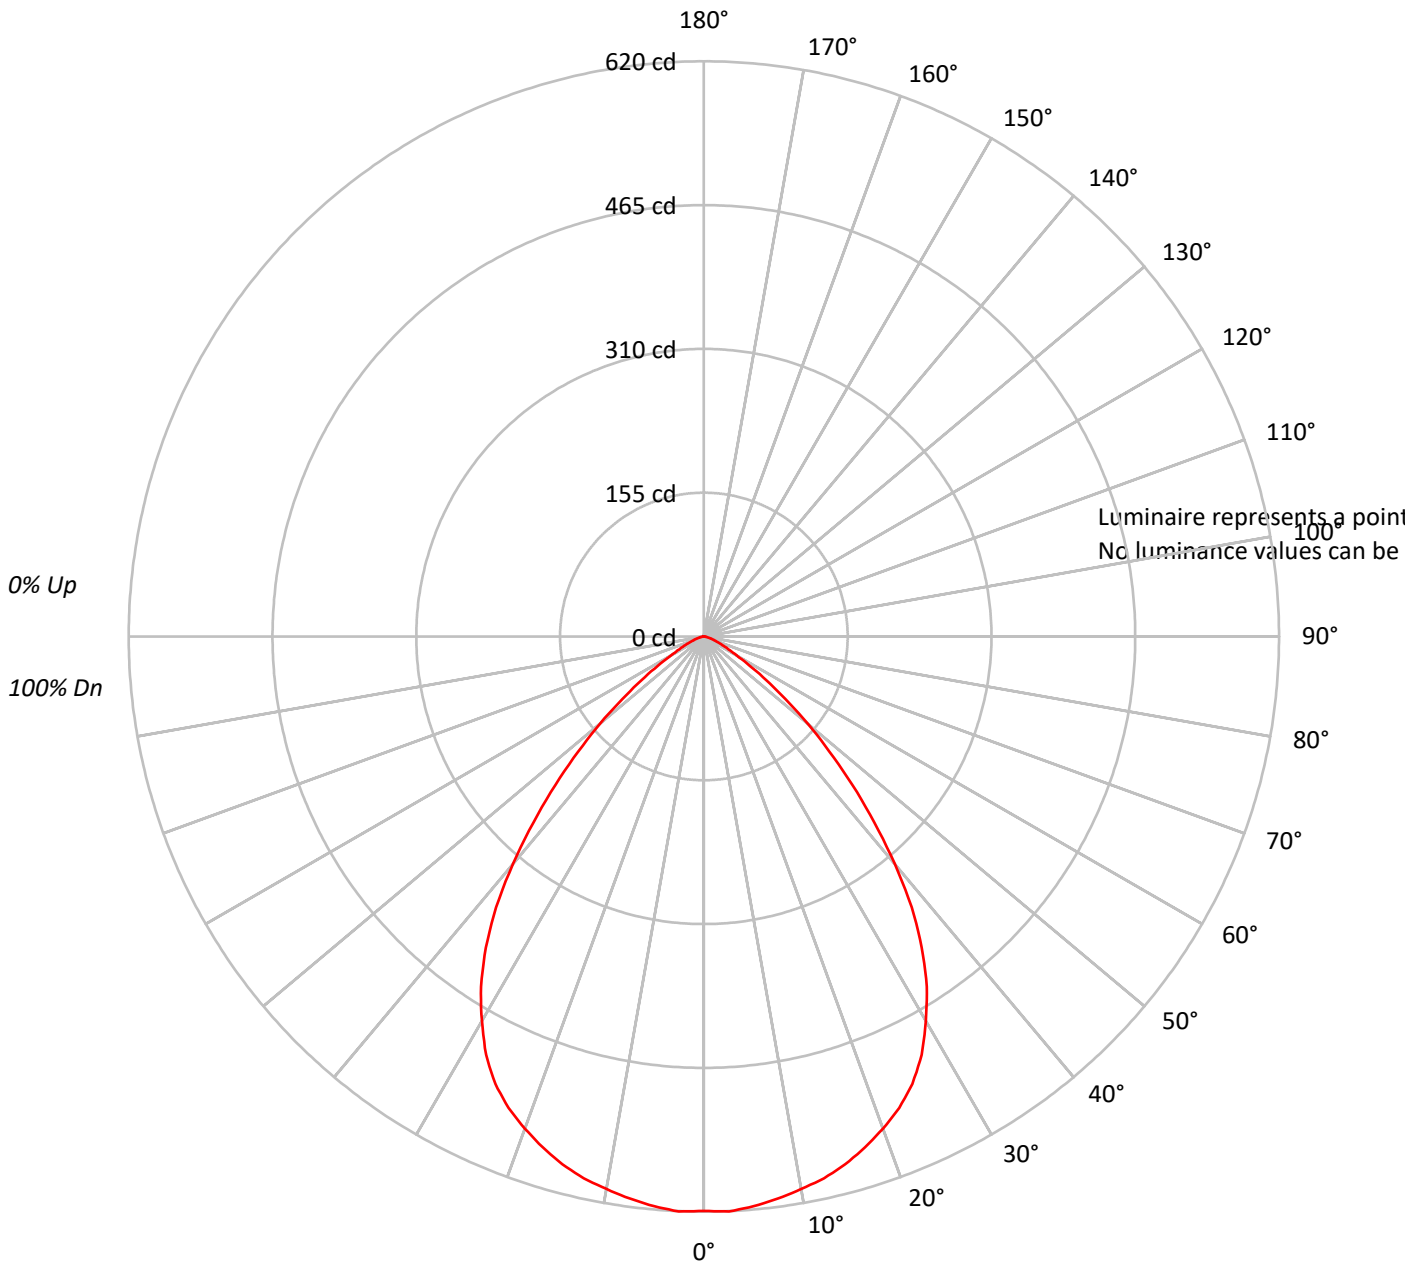



TEST NUMBER: P202701

CATALOG NUMBER: LE\_6B10D010 EC6B10209030 6LBWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91		
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81		
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73		
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65		
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59		
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53		
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49		
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44		
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41		
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202701

CATALOG NUMBER: LE\_6B10D010 EC6B10209030 6LBWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	58.5	5.8
10°-20°	165.9	16.5
20°-30°	243.3	24.2
30°-40°	253.2	25.2
40°-50°	175.2	17.5
50°-60°	76.2	7.6
60°-70°	23.4	2.3
70°-80°	7.0	0.7
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	467.6	46.6
0°-40°	720.8	71.8
0°-60°	972.2	96.9
0°-90°	1003.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1003.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	619	
5°	616	58
15°	589	166
25°	532	243
35°	410	253
45°	226	175
55°	82	76
65°	22	23
75°	6	7
85°	1	1
90°	0	



TEST NUMBER: P202701

CATALOG NUMBER: LE\_6B10D010 EC6B10209030 6LBWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	619.1
2.5°	620.4
5°	616.5
7.5°	611.2
10°	604.8
12.5°	598.2
15°	589.1
17.5°	577.5
20°	564.5
22.5°	550.1
25°	532.0
27.5°	508.5
30°	478.6
32.5°	447.4
35°	409.6
37.5°	368.1
40°	320.0
42.5°	271.9
45°	226.2
47.5°	183.4
50°	145.6
52.5°	110.5
55°	81.9
57.5°	58.5
60°	40.4
62.5°	29.9
65°	22.1
67.5°	16.9
70°	11.8
72.5°	9.1
75°	6.5
77.5°	3.9
80°	2.6
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)