

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203113

Luminaire Tested: **LE_6B10D010 EC6B10209030 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203113
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209030 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1072.6 lumens
Efficiency: N/A
Efficacy: 108.3 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203113
CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBWMW1

Luminous Intensity Polar Plot

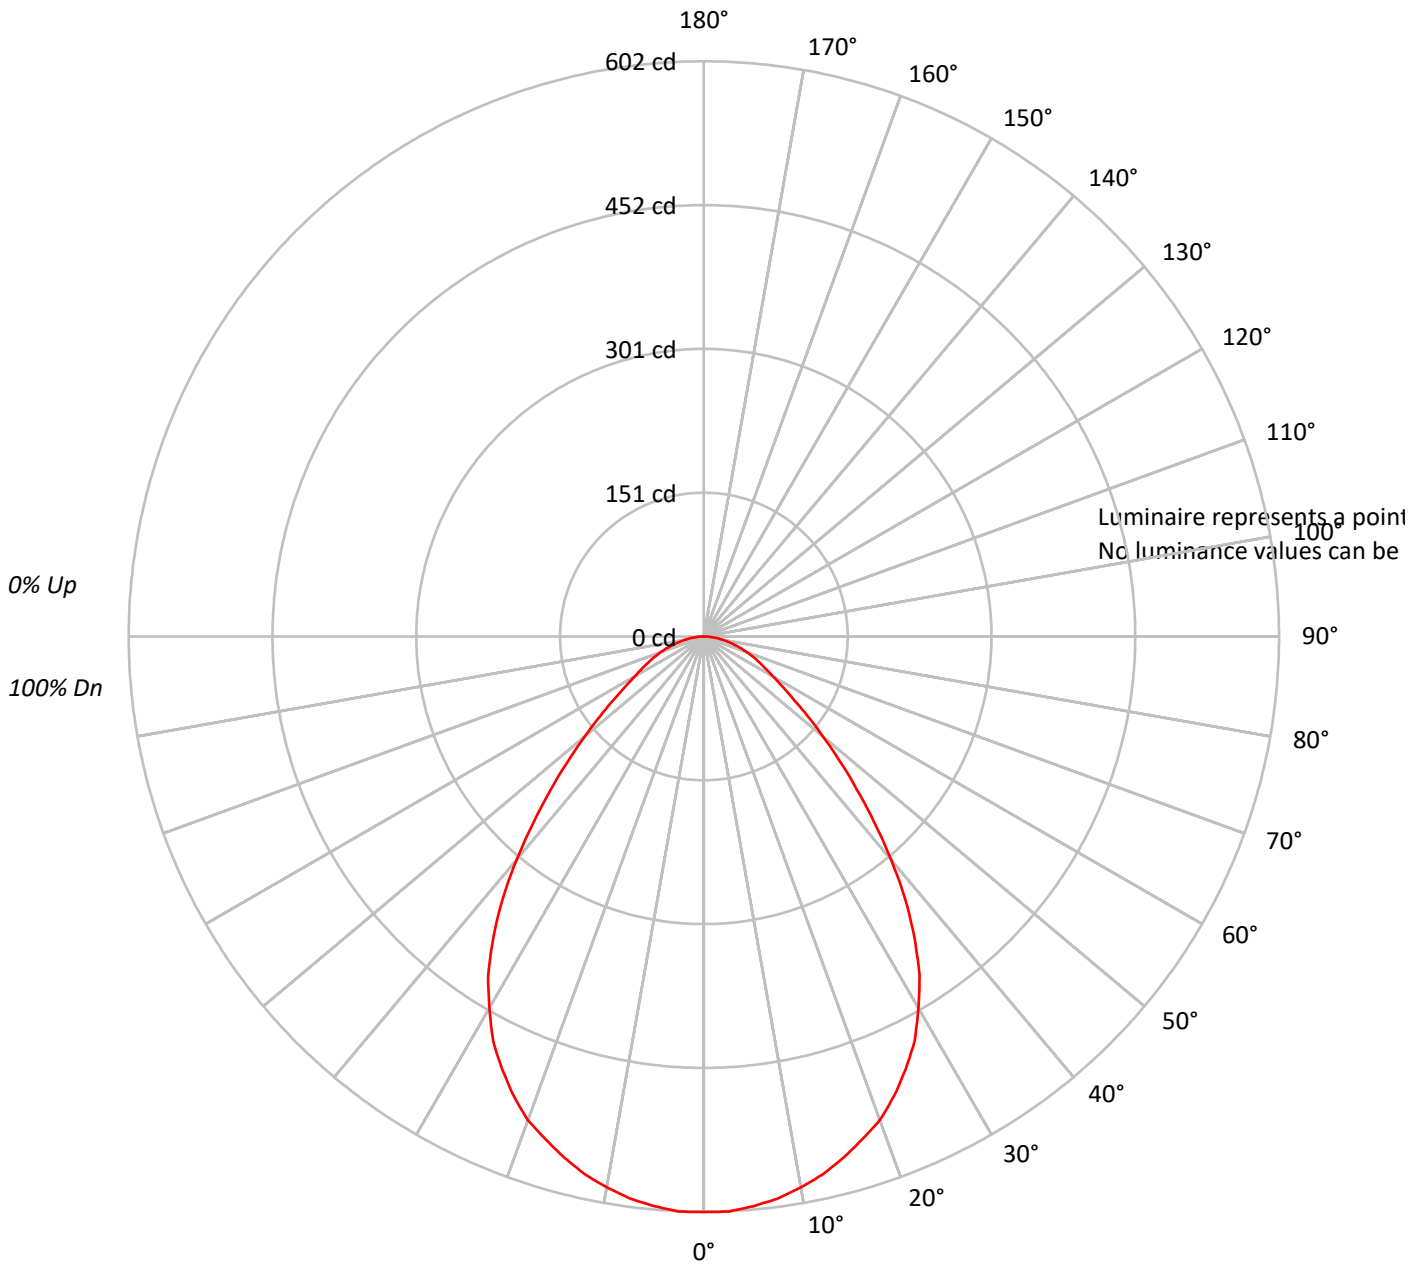



TEST NUMBER: P203113

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77			
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68			
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37			
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203113

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.7	5.3
10°-20°	159.1	14.8
20°-30°	229.2	21.4
30°-40°	238.0	22.2
40°-50°	175.9	16.4
50°-60°	105.1	9.8
60°-70°	63.9	6.0
70°-80°	35.0	3.3
80°-90°	9.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	445.0	41.5
0°-40°	683.0	63.7
0°-60°	964.0	89.9
0°-90°	1072.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1072.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	602	
5°	598	57
15°	565	159
25°	500	229
35°	384	238
45°	226	176
55°	114	105
65°	64	64
75°	32	35
85°	8	10
90°	0	



TEST NUMBER: P203113

CATALOG NUMBER: LE_6B10D010 EC6B10209030 6LBWMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	602.4
2.5°	602.4
5°	598.4
7.5°	593.2
10°	585.4
12.5°	576.4
15°	564.6
17.5°	551.6
20°	538.6
22.5°	520.4
25°	499.6
27.5°	477.5
30°	448.9
32.5°	420.2
35°	383.8
37.5°	346.0
40°	304.4
42.5°	264.1
45°	226.4
47.5°	192.5
50°	162.6
52.5°	136.6
55°	114.5
57.5°	97.6
60°	83.2
62.5°	72.9
65°	63.8
67.5°	56.0
70°	48.1
72.5°	40.4
75°	32.5
77.5°	26.0
80°	19.5
82.5°	14.2
85°	7.8
87.5°	3.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)