

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204769

Luminaire Tested: **LE_6B10D010 EC6B10209730 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204769
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209730 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1089.1 lumens
Efficiency: N/A
Efficacy: 110.0 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204769

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBCSMW1

Luminous Intensity Polar Plot

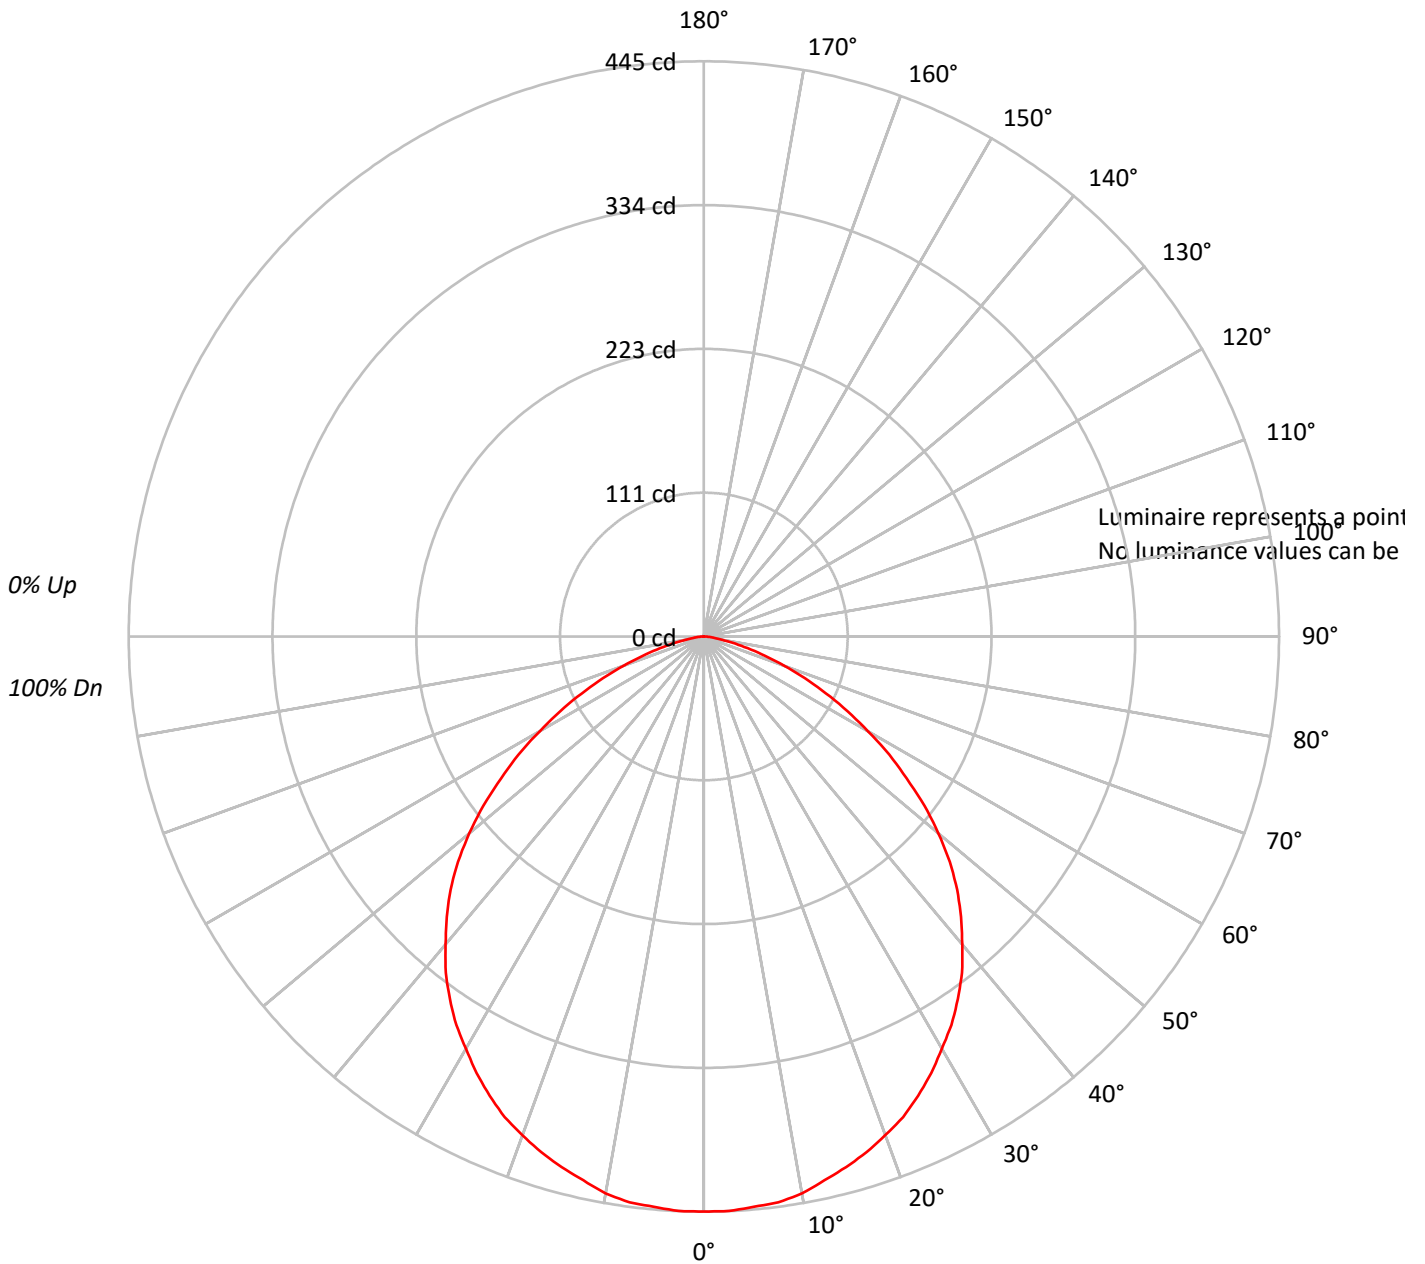



TEST NUMBER: P204769

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204769

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.1	3.9
10°-20°	120.0	11.0
20°-30°	180.5	16.6
30°-40°	213.9	19.6
40°-50°	212.9	19.5
50°-60°	171.6	15.8
60°-70°	103.8	9.5
70°-80°	38.6	3.5
80°-90°	5.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	342.6	31.5
0°-40°	556.5	51.1
0°-60°	941.0	86.4
0°-90°	1089.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1089.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	445	
5°	443	42
15°	425	120
25°	392	180
35°	342	214
45°	277	213
55°	191	172
65°	104	104
75°	35	39
85°	5	6
90°	0	



TEST NUMBER: P204769

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	444.9
2.5°	444.9
5°	442.9
7.5°	441.5
10°	437.6
12.5°	431.0
15°	425.0
17.5°	418.4
20°	410.5
22.5°	402.6
25°	392.0
27.5°	380.8
30°	368.2
32.5°	356.4
35°	342.5
37.5°	328.0
40°	310.9
42.5°	294.4
45°	277.2
47.5°	258.0
50°	236.9
52.5°	215.1
55°	191.4
57.5°	170.2
60°	146.5
62.5°	125.4
65°	104.2
67.5°	84.5
70°	66.0
72.5°	49.5
75°	35.0
77.5°	22.5
80°	13.2
82.5°	7.9
85°	4.6
87.5°	2.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)