

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204457

Luminaire Tested: **LE_6B10D010 EC6B10209730 6LBSB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204457
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209730 6LBSB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 907.8 lumens
Efficiency: N/A
Efficacy: 91.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.3
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204457

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBSB1

Luminous Intensity Polar Plot

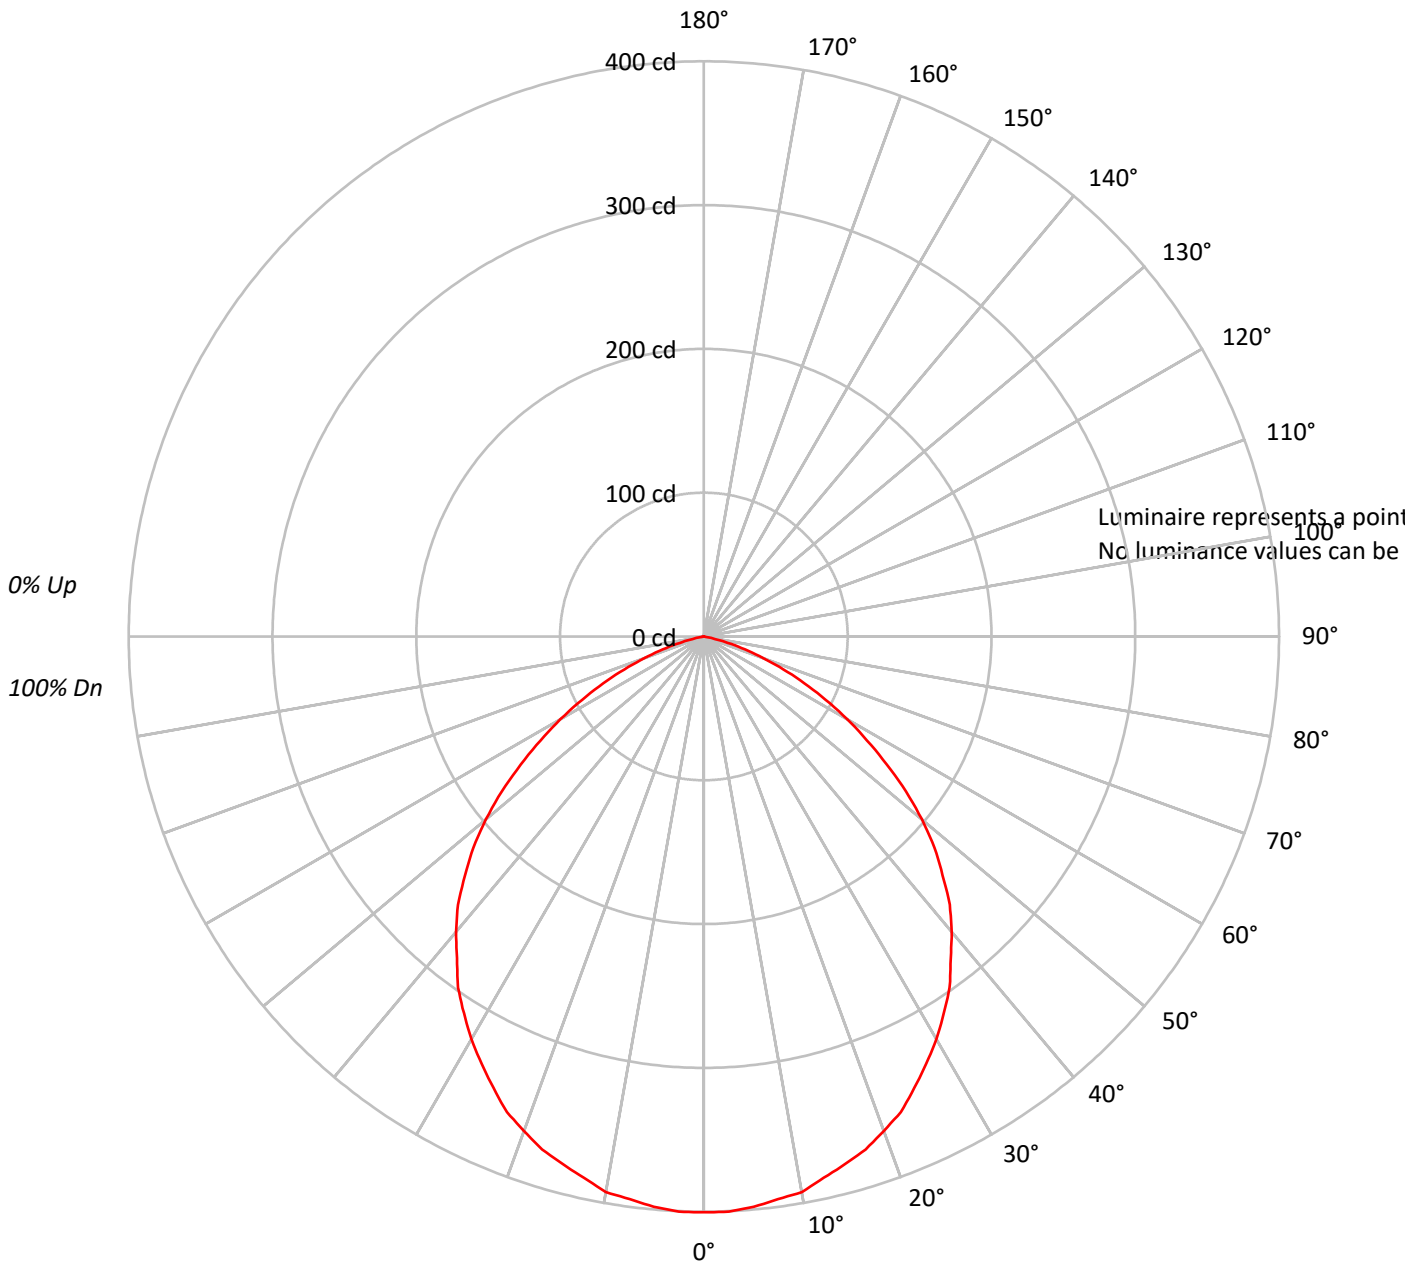



TEST NUMBER: P204457

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBSB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	105	101	98	100	98	95	97	94	93	93	91	90	88				88
2	102	95	89	84	100	93	88	83	90	85	81	86	83	79	84	80	78	76				76
3	94	84	77	72	91	83	76	71	80	74	70	77	73	69	75	71	67	65				65
4	86	76	68	62	84	74	67	61	72	65	60	70	64	60	68	63	59	57				57
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50				50
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44				44
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	45	41	39				39
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35				35
9	60	47	39	34	59	47	39	34	46	39	34	45	38	34	44	38	34	32				32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	40	35	31	29				29

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204457

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBSB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.8	4.2
10°-20°	107.2	11.8
20°-30°	159.5	17.6
30°-40°	185.6	20.4
40°-50°	180.9	19.9
50°-60°	139.2	15.3
60°-70°	77.0	8.5
70°-80°	20.3	2.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	304.6	33.6
0°-40°	490.2	54.0
0°-60°	810.3	89.3
0°-90°	907.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	907.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	400	
5°	398	38
15°	380	107
25°	346	160
35°	298	186
45°	235	181
55°	155	139
65°	77	77
75°	17	20
85°	0	0
90°	0	



TEST NUMBER: P204457

CATALOG NUMBER: LE_6B10D010 EC6B10209730 6LBSB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	400.4
2.5°	400.4
5°	398.1
7.5°	394.6
10°	392.4
12.5°	385.5
15°	379.8
17.5°	374.0
20°	365.9
22.5°	357.9
25°	346.4
27.5°	334.9
30°	323.4
32.5°	310.6
35°	298.0
37.5°	281.9
40°	268.1
42.5°	253.1
45°	234.8
47.5°	217.5
50°	197.9
52.5°	177.2
55°	155.4
57.5°	134.6
60°	115.1
62.5°	95.5
65°	77.1
67.5°	59.9
70°	43.8
72.5°	29.9
75°	17.2
77.5°	8.0
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)