

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202904

Luminaire Tested: **LE_6B10D010 EC6B10208040 6LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202904
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10208040 6LBWGPH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 916.3 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202904

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBWGPH1

Luminous Intensity Polar Plot

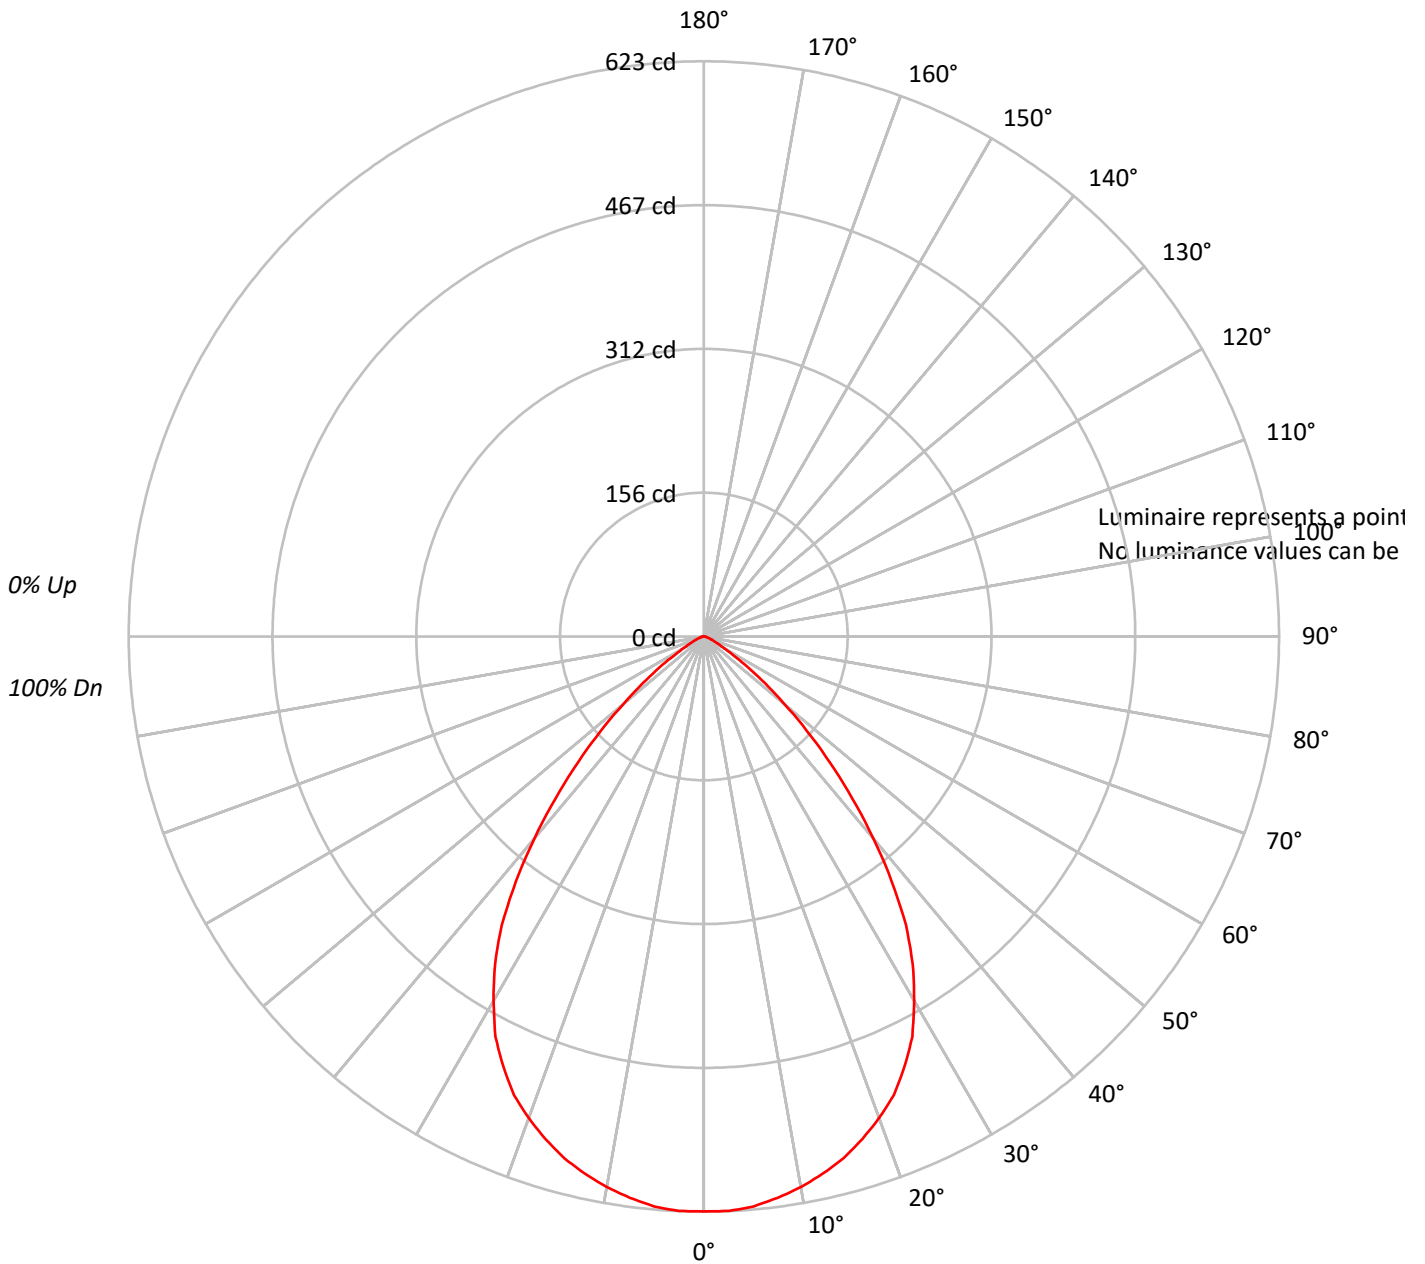



TEST NUMBER: P202904

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82			
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74			
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67			
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61			
6	81	71	64	59	80	70	63	58	68	62	58	67	62	58	65	61	57	56			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51			
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47			
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43			
10	64	53	46	42	63	52	46	42	51	45	41	51	45	41	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202904

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.7	6.4
10°-20°	164.5	18.0
20°-30°	235.4	25.7
30°-40°	234.6	25.6
40°-50°	149.4	16.3
50°-60°	55.1	6.0
60°-70°	13.8	1.5
70°-80°	4.1	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	458.6	50.0
0°-40°	693.2	75.6
0°-60°	897.7	98.0
0°-90°	916.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	916.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	623	
5°	620	59
15°	585	165
25°	514	235
35°	382	235
45°	192	149
55°	58	55
65°	13	14
75°	3	4
85°	0	1
90°	0	



TEST NUMBER: P202904

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBWGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	622.8
2.5°	622.8
5°	619.6
7.5°	613.2
10°	605.4
12.5°	595.9
15°	584.9
17.5°	570.8
20°	555.0
22.5°	537.6
25°	514.0
27.5°	488.8
30°	455.6
32.5°	421.0
35°	381.5
37.5°	334.2
40°	285.4
42.5°	238.0
45°	192.4
47.5°	151.4
50°	113.5
52.5°	83.5
55°	58.4
57.5°	37.9
60°	25.2
62.5°	17.4
65°	12.6
67.5°	9.5
70°	7.9
72.5°	4.8
75°	3.1
77.5°	3.1
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)