

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204662

Luminaire Tested: **LE_6B10D010 EC6B10209040 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204662
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209040 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1251.9 lumens
Efficiency: N/A
Efficacy: 126.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204662

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBPSMW1

Luminous Intensity Polar Plot

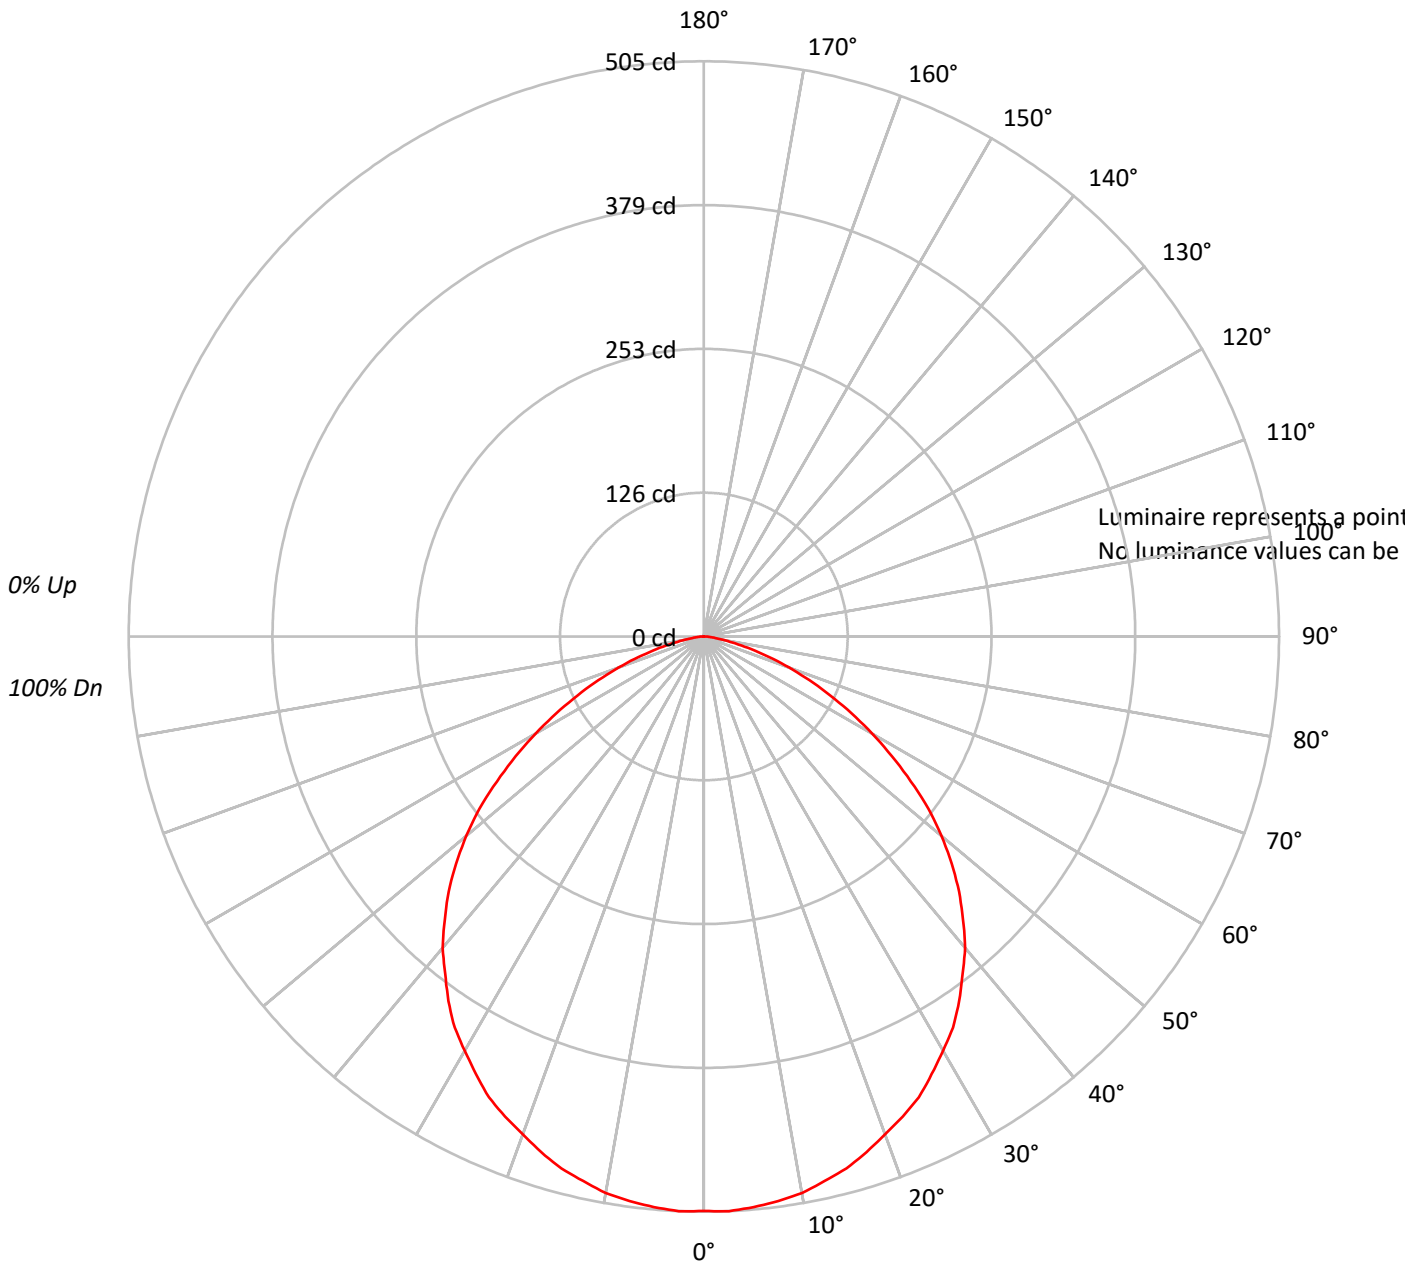



TEST NUMBER: P204662

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204662

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.8	3.8
10°-20°	136.2	10.9
20°-30°	205.2	16.4
30°-40°	244.1	19.5
40°-50°	243.7	19.5
50°-60°	198.2	15.8
60°-70°	121.9	9.7
70°-80°	47.2	3.8
80°-90°	7.6	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	389.2	31.1
0°-40°	633.3	50.6
0°-60°	1075.2	85.9
0°-90°	1251.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1251.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	504	
5°	503	48
15°	484	136
25°	446	205
35°	391	244
45°	317	244
55°	222	198
65°	122	122
75°	43	47
85°	6	8
90°	0	



TEST NUMBER: P204662

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	504.4
2.5°	505.1
5°	502.9
7.5°	500.0
10°	496.2
12.5°	489.6
15°	483.6
17.5°	474.8
20°	465.1
22.5°	456.2
25°	446.5
27.5°	433.2
30°	419.9
32.5°	407.2
35°	390.9
37.5°	373.1
40°	356.8
42.5°	336.8
45°	316.8
47.5°	295.2
50°	272.2
52.5°	248.5
55°	221.8
57.5°	195.9
60°	170.6
62.5°	146.1
65°	122.4
67.5°	100.1
70°	79.4
72.5°	60.1
75°	43.0
77.5°	28.2
80°	17.0
82.5°	10.4
85°	5.9
87.5°	3.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)