

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205376

Luminaire Tested: **LE_6B10D010 EC6B10209040 6LBSLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205376
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10209040 6LBSLI1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1242.6 lumens
Efficiency: N/A
Efficacy: 125.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205376

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBSLI1

Luminous Intensity Polar Plot

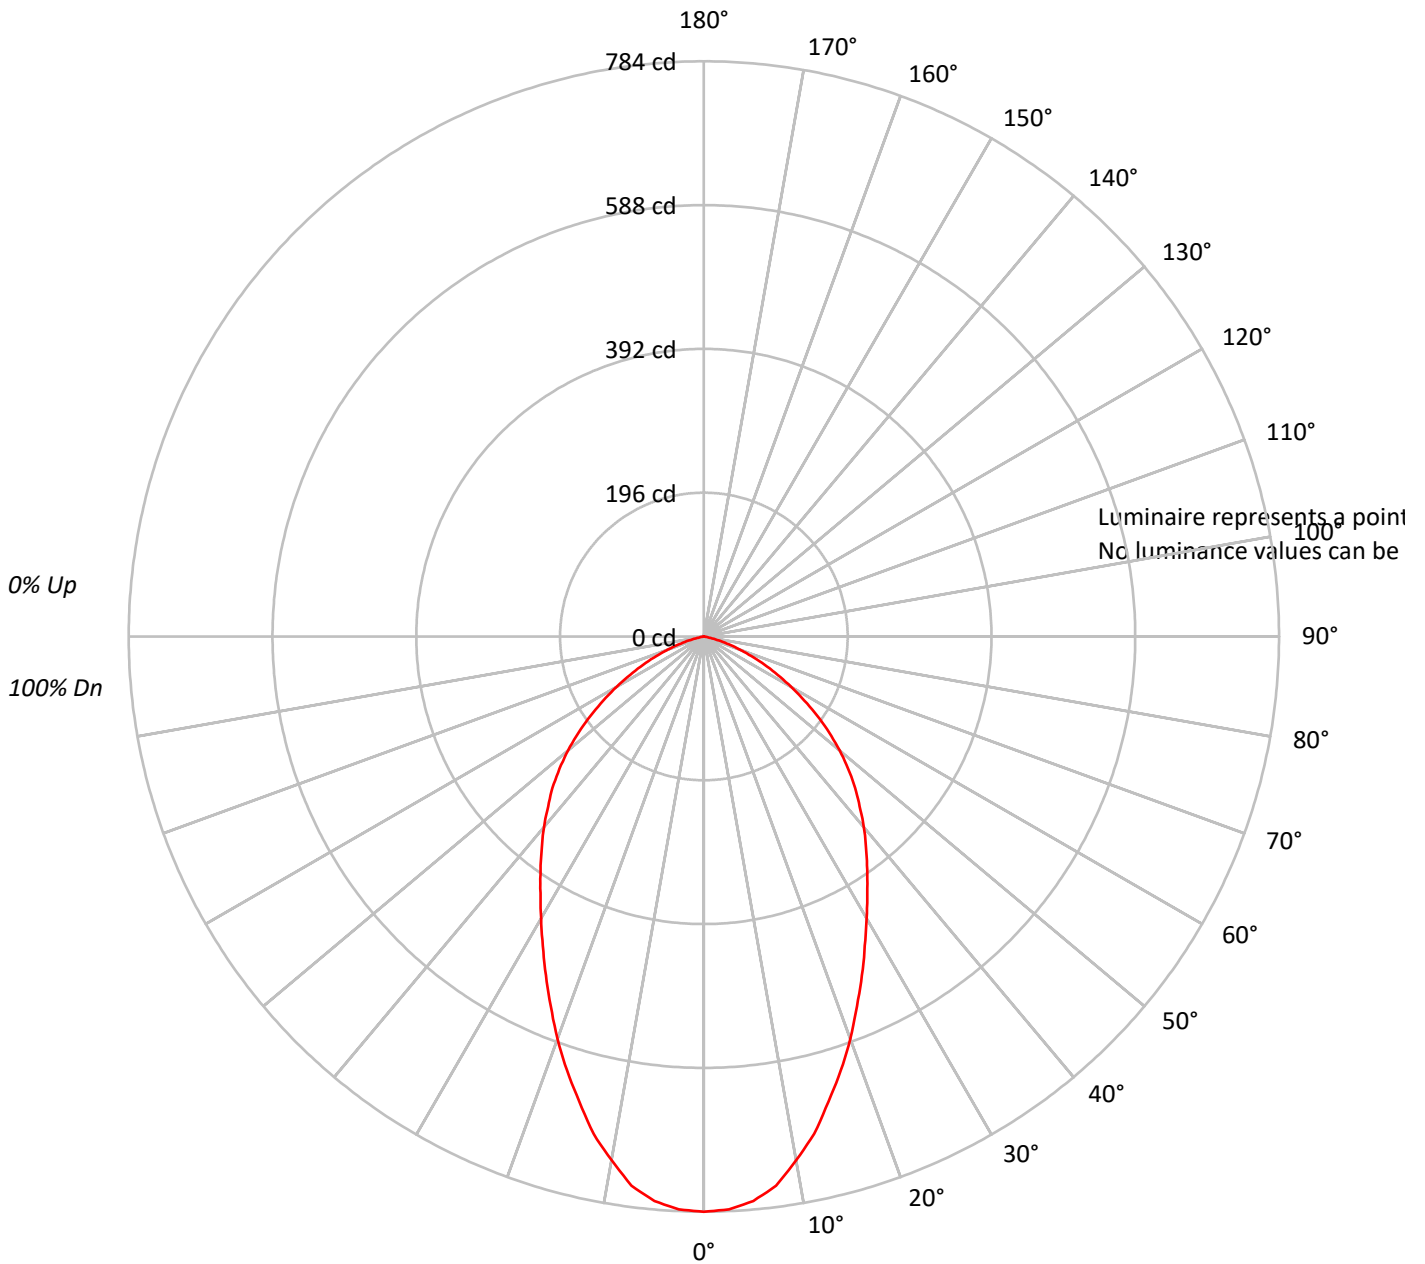



TEST NUMBER: P205376

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBSLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77			
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68			
4	88	78	70	64	86	77	69	64	74	68	63	72	67	62	70	65	62	60			
5	82	71	63	57	80	70	62	57	67	61	56	66	60	55	64	59	55	53			
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	47			
7	71	59	51	46	70	58	51	45	57	50	45	55	49	45	54	49	45	43			
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39			
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36			
10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205376

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBSLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.3	5.8
10°-20°	184.0	14.8
20°-30°	234.6	18.9
30°-40°	243.3	19.6
40°-50°	224.2	18.0
50°-60°	168.6	13.6
60°-70°	91.0	7.3
70°-80°	24.4	2.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	490.8	39.5
0°-40°	734.1	59.1
0°-60°	1126.9	90.7
0°-90°	1242.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1242.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	784	
5°	772	72
15°	656	184
25°	510	235
35°	388	243
45°	292	224
55°	189	169
65°	91	91
75°	21	24
85°	0	0
90°	0	



TEST NUMBER: P205376

CATALOG NUMBER: LE_6B10D010 EC6B10209040 6LBSLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	784.2
2.5°	781.6
5°	772.4
7.5°	755.1
10°	724.8
12.5°	694.5
15°	656.1
17.5°	620.5
20°	583.5
22.5°	545.2
25°	509.6
27.5°	475.2
30°	443.6
32.5°	414.5
35°	388.1
37.5°	363.1
40°	339.2
42.5°	314.2
45°	291.8
47.5°	266.8
50°	241.6
52.5°	215.2
55°	188.8
57.5°	162.4
60°	137.2
62.5°	113.5
65°	91.1
67.5°	70.0
70°	51.5
72.5°	35.6
75°	21.1
77.5°	9.2
80°	2.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)