

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204771

Luminaire Tested: **LE\_6B15D010 EC6B10208030 6LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204771  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B15D010 EC6B10208030 6LBCSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2012.8 lumens  
Efficiency: N/A  
Efficacy: 140.8 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204771

CATALOG NUMBER: LE\_6B15D010 EC6B10208030 6LBCSMW1

### Luminous Intensity Polar Plot

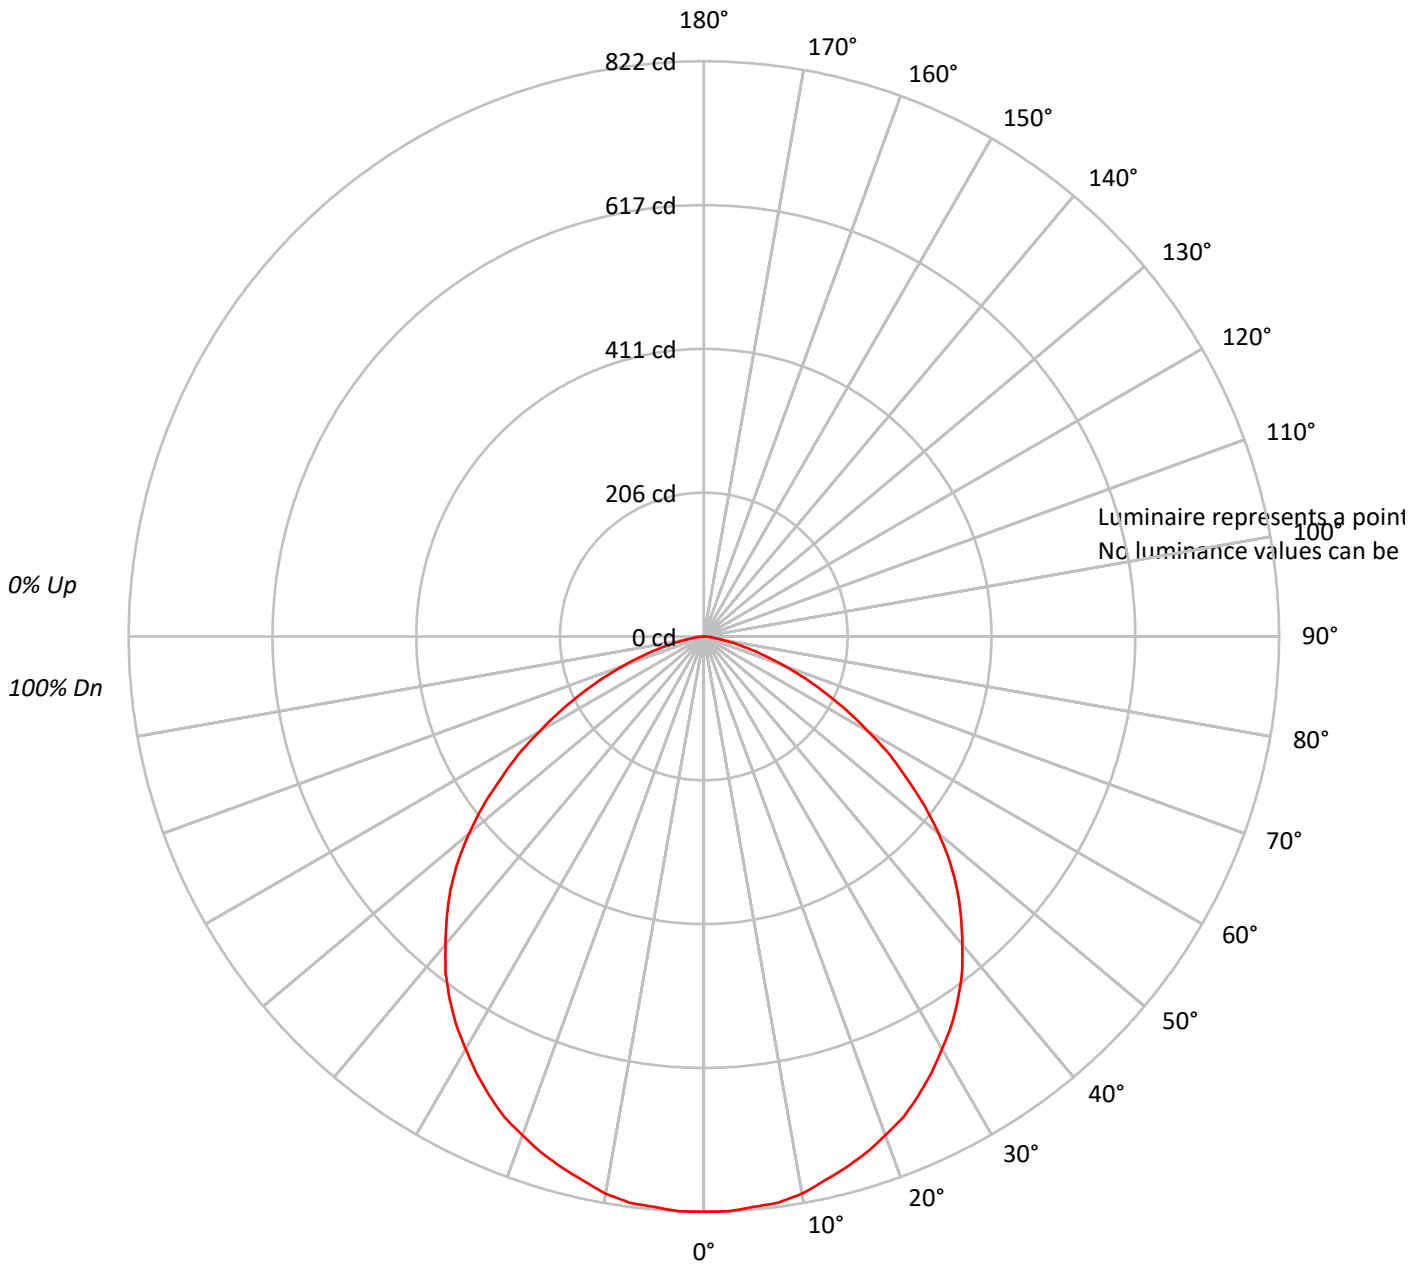



TEST NUMBER: P204771

CATALOG NUMBER: LE\_6B15D010 EC6B10208030 6LBCSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87																												
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74																												
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63																												
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55																												
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48																												
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42																												
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37																												
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33																												
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30																												
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27																												

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204771

CATALOG NUMBER: LE\_6B15D010 EC6B10208030 6LBCSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	77.9	3.9
10°-20°	221.7	11.0
20°-30°	333.6	16.6
30°-40°	395.3	19.6
40°-50°	393.4	19.5
50°-60°	317.1	15.8
60°-70°	191.9	9.5
70°-80°	71.2	3.5
80°-90°	10.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	633.2	31.5
0°-40°	1028.5	51.1
0°-60°	1739.0	86.4
0°-90°	2012.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2012.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	822	
5°	818	78
15°	786	222
25°	724	334
35°	633	395
45°	512	393
55°	354	317
65°	193	192
75°	65	71
85°	8	11
90°	0	



TEST NUMBER: P204771

CATALOG NUMBER: LE\_6B15D010 EC6B10208030 6LBCSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	822.1
2.5°	822.1
5°	818.4
7.5°	816.0
10°	808.6
12.5°	796.5
15°	785.5
17.5°	773.2
20°	758.6
22.5°	744.0
25°	724.5
27.5°	703.8
30°	680.6
32.5°	658.6
35°	633.0
37.5°	606.2
40°	574.5
42.5°	544.0
45°	512.2
47.5°	476.9
50°	437.9
52.5°	397.6
55°	353.8
57.5°	314.6
60°	270.8
62.5°	231.8
65°	192.8
67.5°	156.1
70°	122.0
72.5°	91.5
75°	64.6
77.5°	41.5
80°	24.4
82.5°	14.6
85°	8.5
87.5°	3.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)