

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203635

Luminaire Tested: **LE_6B15D010 EC6B10208030 6LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10208030 6LBNH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1152.7 lumens
Efficiency: N/A
Efficacy: 80.6 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203635

CATALOG NUMBER: LE_6B15D010 EC6B10208030 6LBNH1

Luminous Intensity Polar Plot

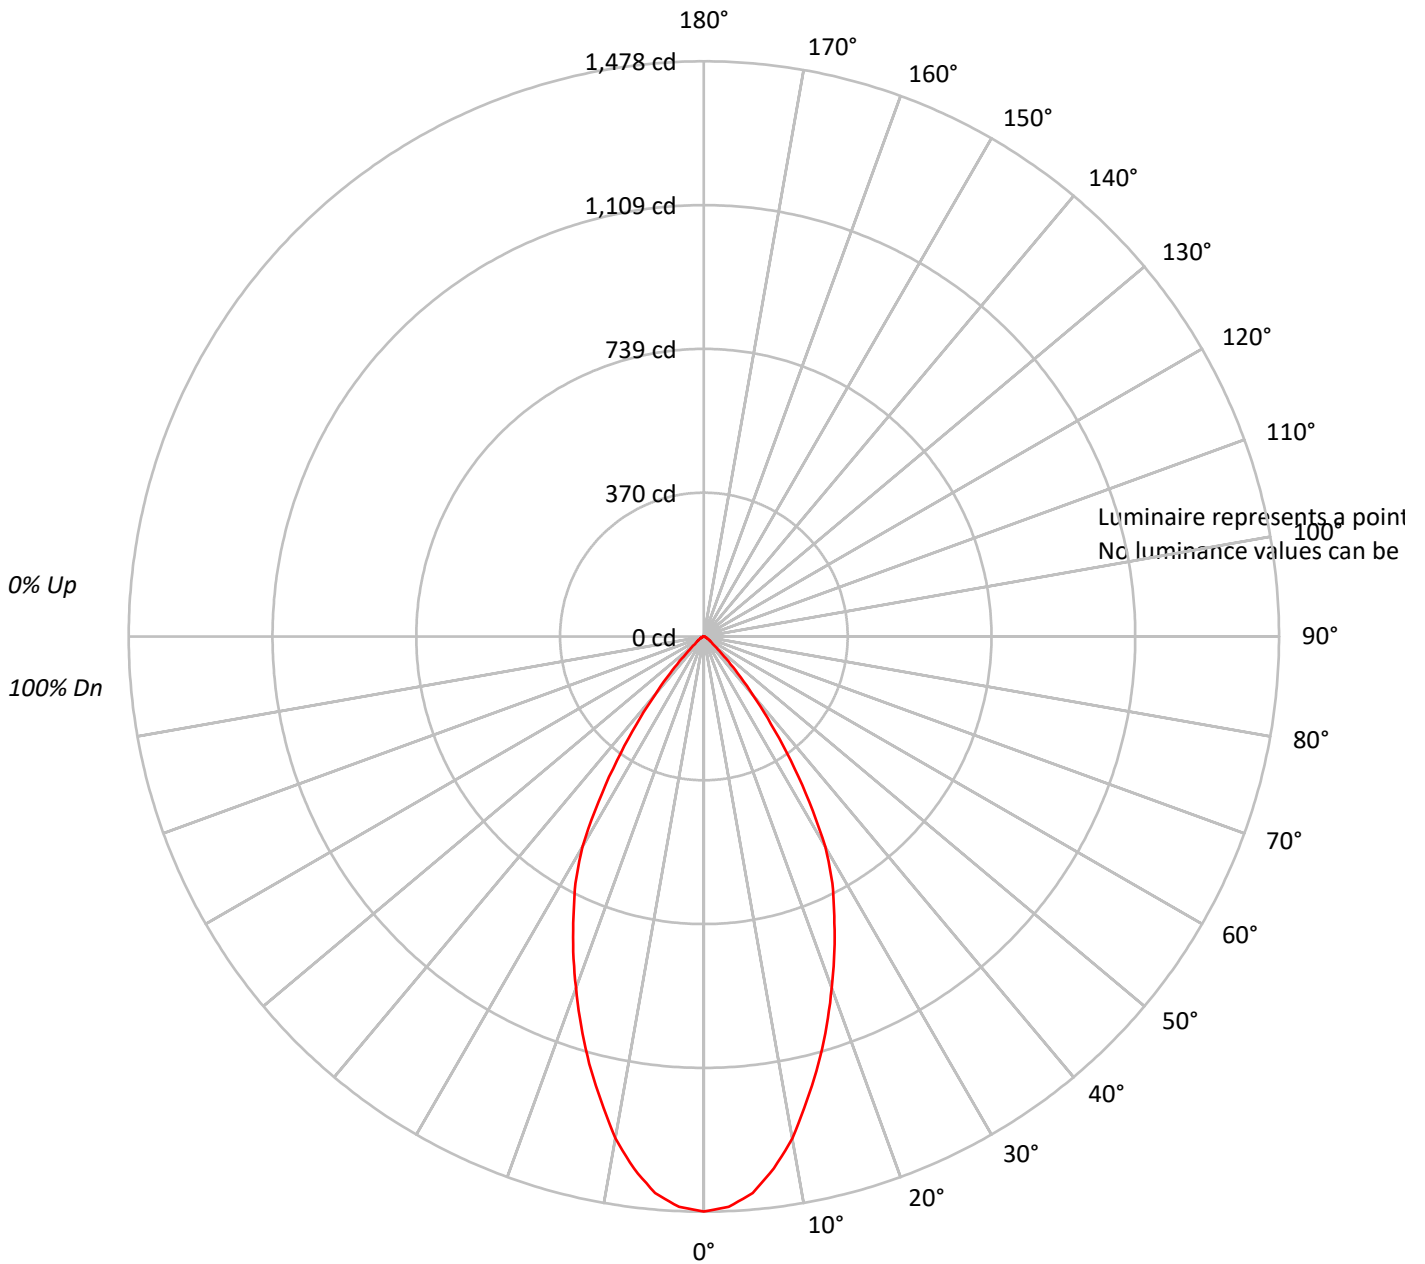



TEST NUMBER: P203635

CATALOG NUMBER: LE_6B15D010 EC6B10208030 6LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87																			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81																			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75																			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70																			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65																			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61																			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58																			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54																			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203635

CATALOG NUMBER: LE_6B15D010 EC6B10208030 6LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.9	11.5
10°-20°	316.9	27.5
20°-30°	363.0	31.5
30°-40°	243.9	21.2
40°-50°	69.7	6.0
50°-60°	17.1	1.5
60°-70°	6.4	0.6
70°-80°	2.5	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	812.8	70.5
0°-40°	1056.7	91.7
0°-60°	1143.5	99.2
0°-90°	1152.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1152.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1478	
5°	1436	133
15°	1137	317
25°	792	363
35°	389	244
45°	80	70
55°	19	17
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P203635

CATALOG NUMBER: LE_6B15D010 EC6B10208030 6LBNH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1477.6
2.5°	1467.1
5°	1435.5
7.5°	1378.8
10°	1309.5
12.5°	1221.1
15°	1137.1
17.5°	1048.9
20°	960.5
22.5°	876.5
25°	792.4
27.5°	714.6
30°	624.2
32.5°	504.5
35°	388.9
37.5°	283.8
40°	195.5
42.5°	128.2
45°	79.9
47.5°	48.4
50°	29.4
52.5°	23.1
55°	18.9
57.5°	14.8
60°	10.5
62.5°	8.4
65°	6.2
67.5°	4.2
70°	4.2
72.5°	2.1
75°	2.1
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)