

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204879

Luminaire Tested: **LE_6B15D010 EC6B10209030 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204879
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209030 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1453.0 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204879

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBCSMB1

Luminous Intensity Polar Plot

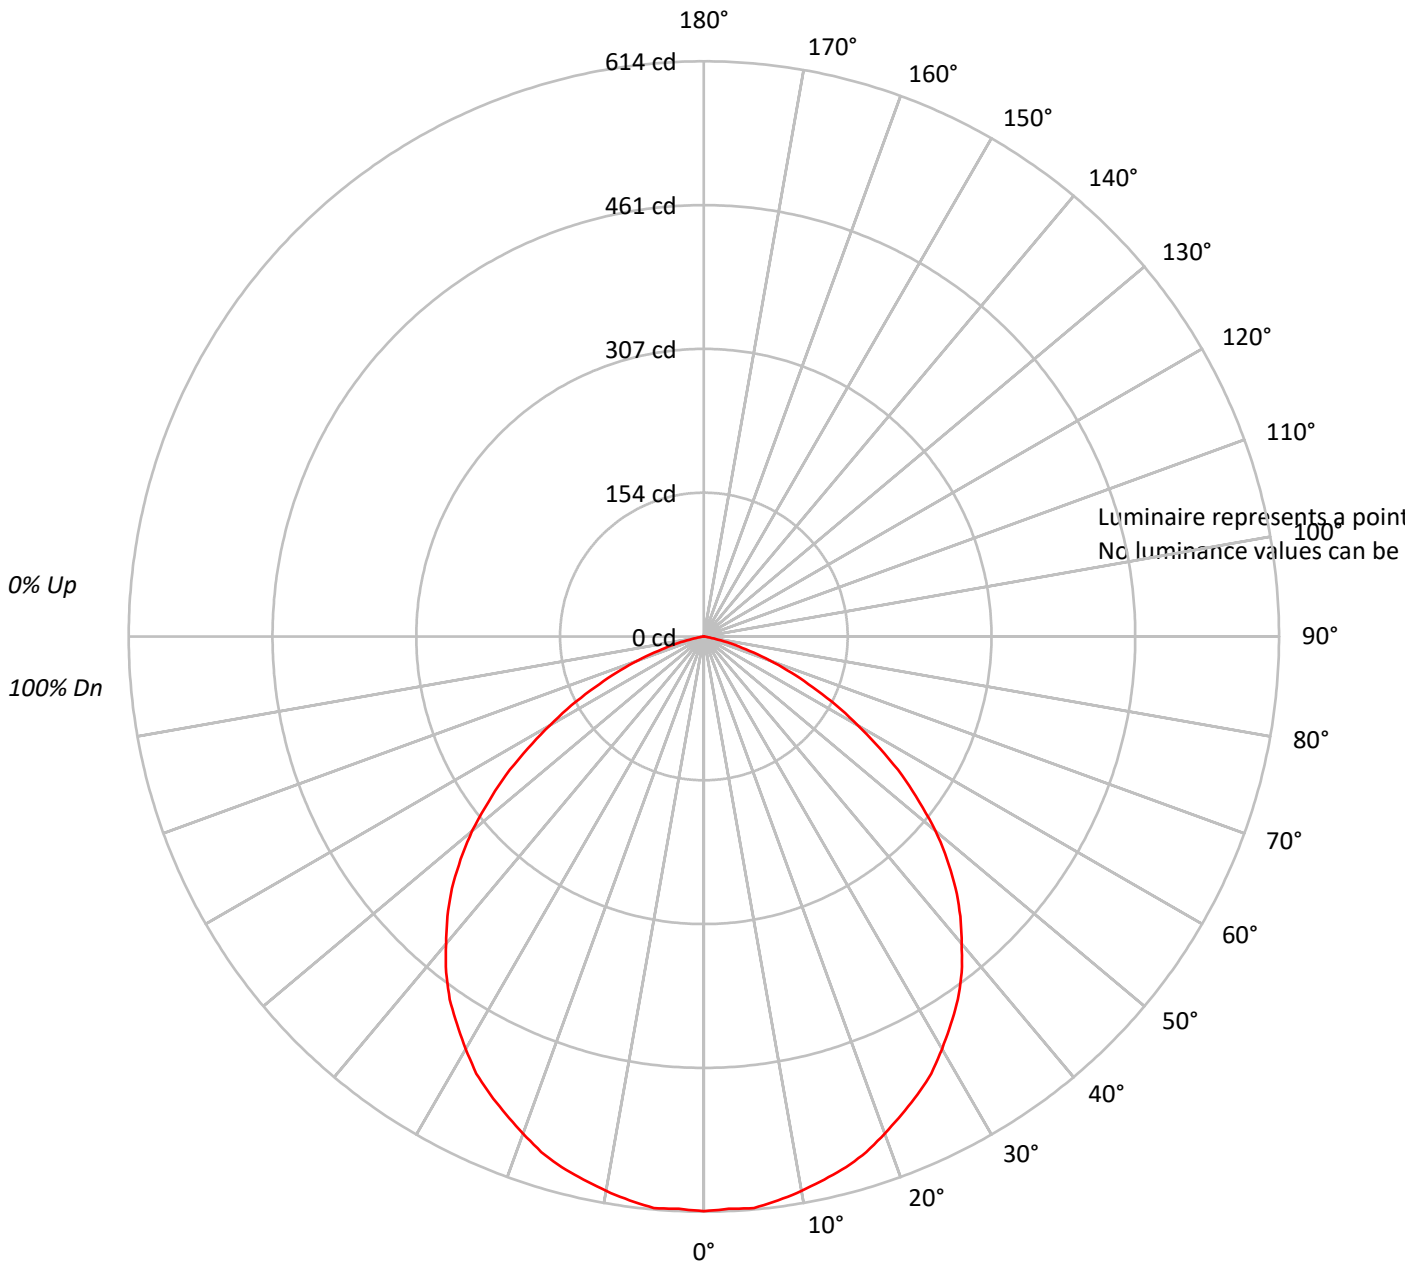



TEST NUMBER: P204879

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 111 | 107 | 103 | 100 | 108 | 104 | 101 | 98 | 100 | 98 | 95 | 96 | 94 | 92 | 93 | 91 | 90 | 88 | | | | | | | | | | | | | | | | | | | |
| 2 | 102 | 95 | 89 | 84 | 99 | 93 | 87 | 83 | 89 | 85 | 81 | 86 | 82 | 79 | 83 | 80 | 77 | 75 | | | | | | | | | | | | | | | | | | | |
| 3 | 93 | 84 | 77 | 71 | 91 | 83 | 76 | 70 | 80 | 74 | 69 | 77 | 72 | 68 | 74 | 70 | 67 | 65 | | | | | | | | | | | | | | | | | | | |
| 4 | 86 | 75 | 67 | 61 | 84 | 74 | 66 | 61 | 71 | 65 | 60 | 69 | 63 | 59 | 67 | 62 | 58 | 56 | | | | | | | | | | | | | | | | | | | |
| 5 | 79 | 67 | 59 | 53 | 77 | 66 | 59 | 53 | 64 | 57 | 52 | 62 | 56 | 52 | 61 | 55 | 51 | 49 | | | | | | | | | | | | | | | | | | | |
| 6 | 74 | 61 | 53 | 47 | 72 | 60 | 52 | 46 | 58 | 51 | 46 | 57 | 50 | 46 | 55 | 50 | 45 | 43 | | | | | | | | | | | | | | | | | | | |
| 7 | 68 | 55 | 47 | 41 | 67 | 55 | 47 | 41 | 53 | 46 | 41 | 52 | 45 | 41 | 50 | 45 | 40 | 39 | | | | | | | | | | | | | | | | | | | |
| 8 | 64 | 51 | 43 | 37 | 62 | 50 | 42 | 37 | 49 | 42 | 37 | 48 | 41 | 37 | 46 | 41 | 36 | 35 | | | | | | | | | | | | | | | | | | | |
| 9 | 60 | 47 | 39 | 33 | 58 | 46 | 39 | 33 | 45 | 38 | 33 | 44 | 38 | 33 | 43 | 37 | 33 | 31 | | | | | | | | | | | | | | | | | | | |
| 10 | 56 | 43 | 35 | 30 | 55 | 43 | 35 | 30 | 42 | 35 | 30 | 41 | 34 | 30 | 40 | 34 | 30 | 28 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204879

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBCSMB1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 58.0 | 4.0 |
| 10°-20° | 165.3 | 11.4 |
| 20°-30° | 248.5 | 17.1 |
| 30°-40° | 294.9 | 20.3 |
| 40°-50° | 291.8 | 20.1 |
| 50°-60° | 229.2 | 15.8 |
| 60°-70° | 128.5 | 8.8 |
| 70°-80° | 36.0 | 2.5 |
| 80°-90° | 0.6 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 471.9 | 32.5 |
| 0°-40° | 766.8 | 52.8 |
| 0°-60° | 1287.8 | 88.6 |
| 0°-90° | 1453.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1453.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 614 | |
| 5° | 612 | 58 |
| 15° | 586 | 165 |
| 25° | 540 | 249 |
| 35° | 473 | 295 |
| 45° | 380 | 292 |
| 55° | 258 | 229 |
| 65° | 128 | 129 |
| 75° | 31 | 36 |
| 85° | 0 | 1 |
| 90° | 0 | |



TEST NUMBER: P204879

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 613.5 |
| 2.5° | 611.5 |
| 5° | 612.5 |
| 7.5° | 607.2 |
| 10° | 601.0 |
| 12.5° | 593.8 |
| 15° | 586.5 |
| 17.5° | 577.1 |
| 20° | 564.6 |
| 22.5° | 552.1 |
| 25° | 539.6 |
| 27.5° | 526.0 |
| 30° | 508.4 |
| 32.5° | 490.6 |
| 35° | 472.9 |
| 37.5° | 452.1 |
| 40° | 428.1 |
| 42.5° | 405.2 |
| 45° | 380.2 |
| 47.5° | 352.1 |
| 50° | 322.9 |
| 52.5° | 289.6 |
| 55° | 258.4 |
| 57.5° | 222.9 |
| 60° | 189.6 |
| 62.5° | 159.4 |
| 65° | 128.1 |
| 67.5° | 101.0 |
| 70° | 75.0 |
| 72.5° | 51.0 |
| 75° | 31.2 |
| 77.5° | 15.6 |
| 80° | 4.1 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)