

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202508

Luminaire Tested: **LE_6B15D010 EC6B10209030 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202508
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209030 6LBSWMH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1645.3 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202508

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBSWMH1

Luminous Intensity Polar Plot

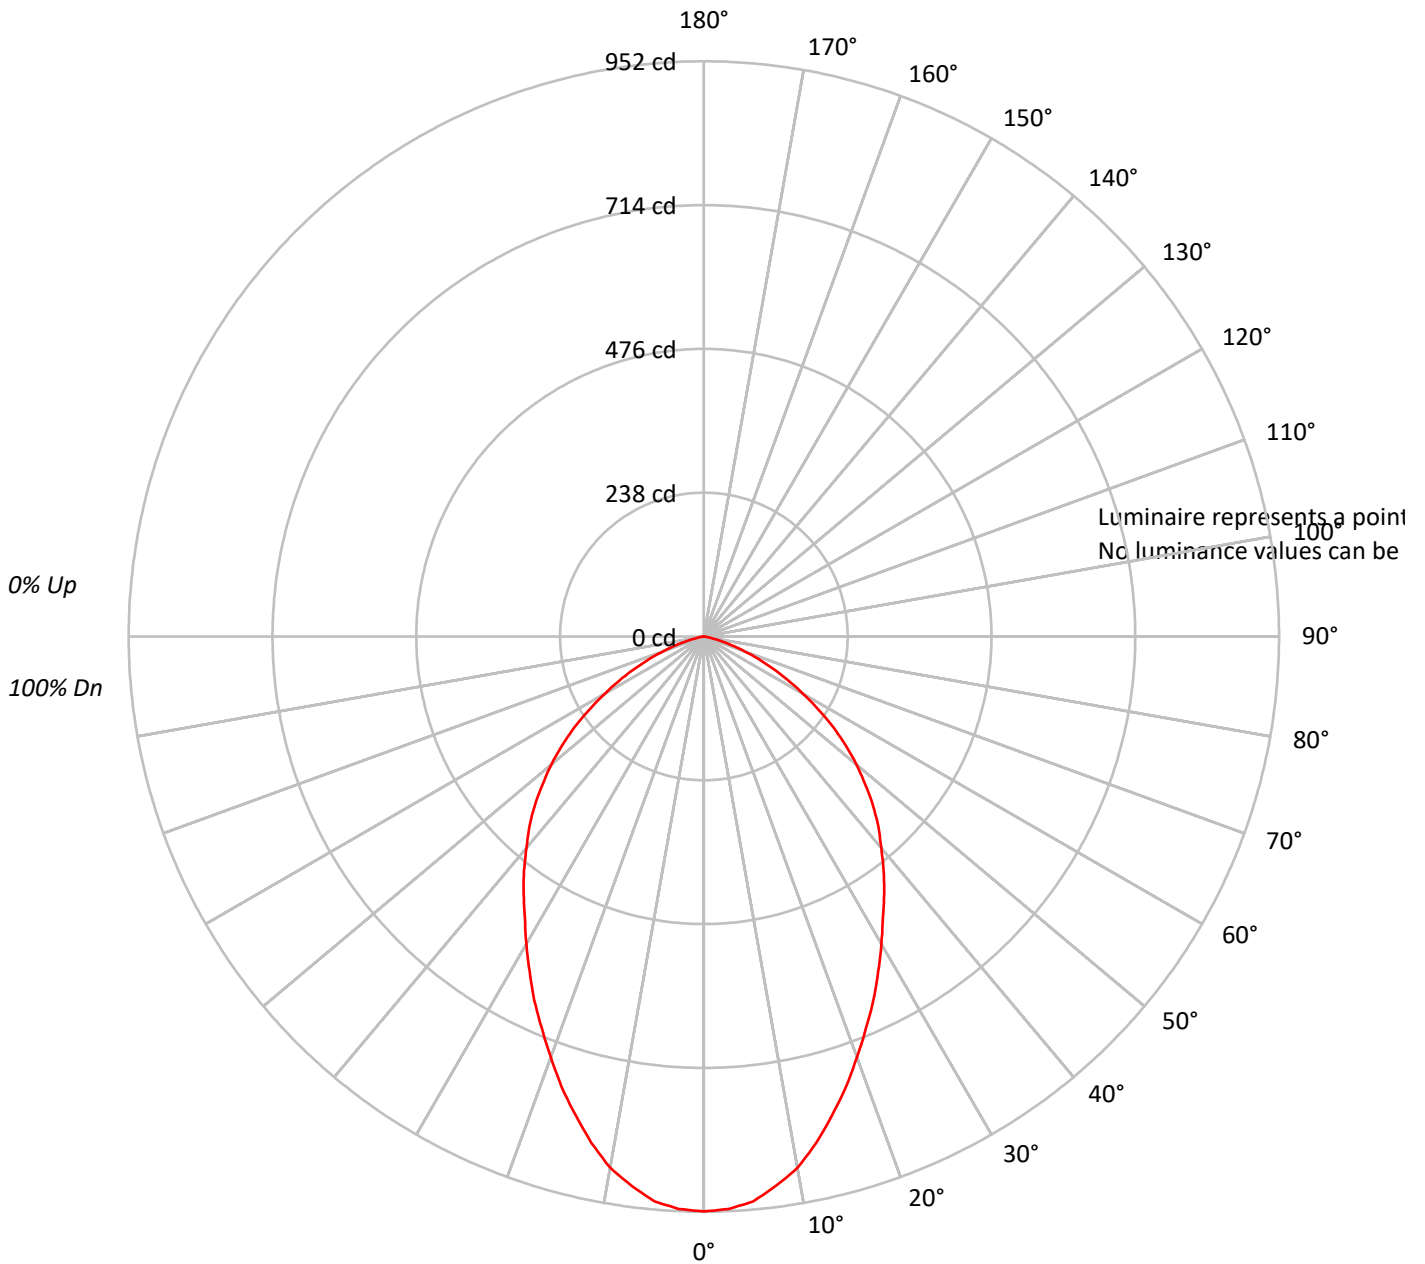



TEST NUMBER: P202508

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88				88
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	81	79	77				77
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67				67
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59				59
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47				47
7	70	58	50	45	69	57	50	45	56	49	44	55	48	44	53	48	44	42				42
8	66	54	46	40	64	53	45	40	52	45	40	50	44	40	49	44	40	38				38
9	62	49	42	37	61	49	42	37	48	41	37	47	41	36	46	40	36	35				35
10	58	46	39	34	57	45	38	34	45	38	34	44	38	33	43	37	33	32				32

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202508

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBSWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.0	5.3
10°-20°	230.1	14.0
20°-30°	305.1	18.5
30°-40°	325.5	19.8
40°-50°	304.3	18.5
50°-60°	232.0	14.1
60°-70°	126.2	7.7
70°-80°	33.8	2.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	623.3	37.9
0°-40°	948.7	57.7
0°-60°	1484.9	90.3
0°-90°	1645.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1645.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	952	
5°	938	88
15°	820	230
25°	664	305
35°	520	325
45°	396	304
55°	261	232
65°	126	126
75°	29	34
85°	0	0
90°	0	



TEST NUMBER: P202508

CATALOG NUMBER: LE_6B15D010 EC6B10209030 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	951.5
2.5°	948.4
5°	938.4
7.5°	917.1
10°	893.0
12.5°	858.8
15°	820.4
17.5°	782.1
20°	740.8
22.5°	701.5
25°	664.2
27.5°	624.9
30°	587.6
32.5°	551.2
35°	520.1
37.5°	488.9
40°	456.6
42.5°	427.4
45°	396.1
47.5°	361.9
50°	329.6
52.5°	295.2
55°	261.0
57.5°	223.8
60°	189.5
62.5°	157.2
65°	126.0
67.5°	97.8
70°	71.5
72.5°	49.4
75°	29.2
77.5°	13.1
80°	3.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)