

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202920

Luminaire Tested: **LE\_6B15D010 EC6B10209030 6LBWGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202920  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B15D010 EC6B10209030 6LBWGPH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1042.2 lumens  
Efficiency: N/A  
Efficacy: 72.9 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202920

CATALOG NUMBER: LE\_6B15D010 EC6B10209030 6LBWGPH1

### Luminous Intensity Polar Plot

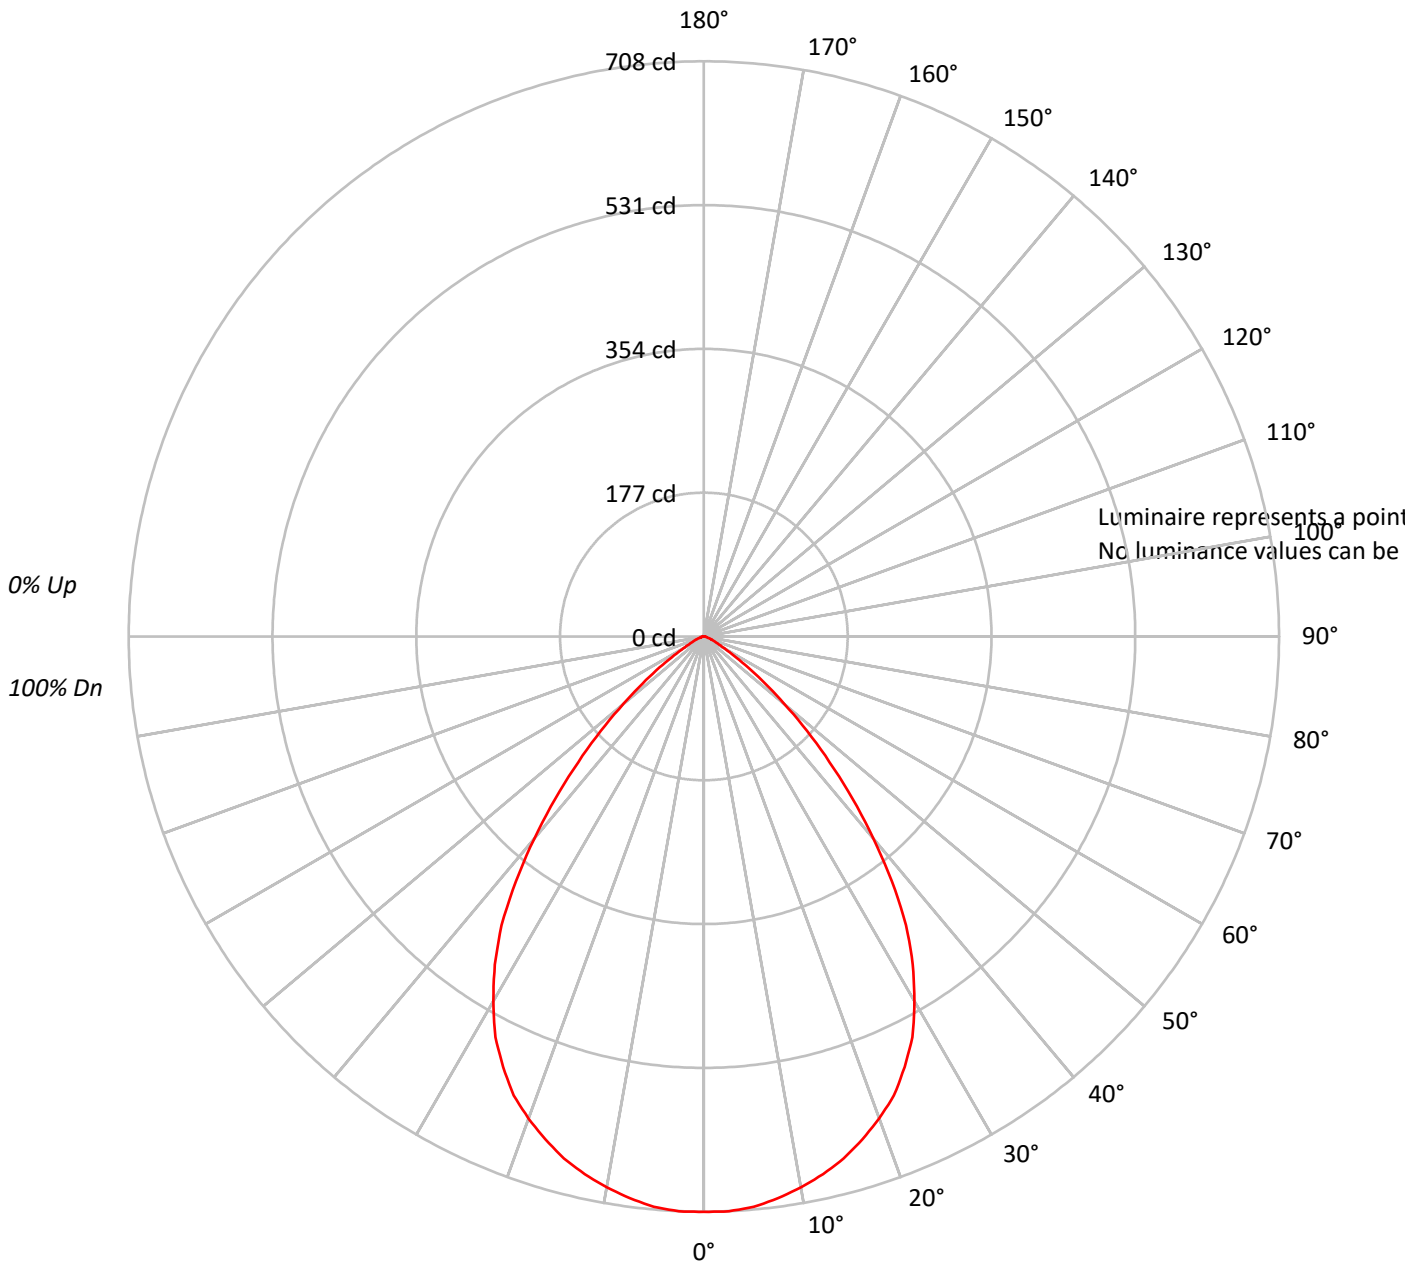



TEST NUMBER: P202920

CATALOG NUMBER: LE\_6B15D010 EC6B10209030 6LBWGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82			
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74			
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67			
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61			
6	81	71	64	59	80	70	63	58	68	62	58	67	62	58	65	61	57	56			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51			
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47			
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43			
10	64	53	46	42	63	52	46	41	51	45	41	51	45	41	50	45	41	40			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202920

CATALOG NUMBER: LE\_6B15D010 EC6B10209030 6LBWGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.7	6.4
10°-20°	187.1	18.0
20°-30°	267.7	25.7
30°-40°	266.8	25.6
40°-50°	170.0	16.3
50°-60°	62.7	6.0
60°-70°	15.7	1.5
70°-80°	4.7	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	521.6	50.0
0°-40°	788.4	75.6
0°-60°	1021.0	98.0
0°-90°	1042.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1042.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	708	
5°	705	67
15°	665	187
25°	585	268
35°	434	267
45°	219	170
55°	66	63
65°	14	16
75°	4	5
85°	0	1
90°	0	



TEST NUMBER: P202920

CATALOG NUMBER: LE\_6B15D010 EC6B10209030 6LBWGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	708.2
2.5°	708.2
5°	704.8
7.5°	697.5
10°	688.6
12.5°	677.9
15°	665.2
17.5°	649.1
20°	631.2
22.5°	611.5
25°	584.6
27.5°	555.9
30°	518.2
32.5°	478.8
35°	434.0
37.5°	380.1
40°	324.6
42.5°	270.8
45°	218.8
47.5°	172.1
50°	129.1
52.5°	95.0
55°	66.4
57.5°	43.0
60°	28.8
62.5°	19.8
65°	14.4
67.5°	10.8
70°	9.0
72.5°	5.4
75°	3.6
77.5°	3.6
80°	1.8
82.5°	1.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)