

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204161

Luminaire Tested: **LE_6B15D010 EC6B10209730 6LBSH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204161
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209730 6LBSH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1424.2 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct

Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204161
CATALOG NUMBER: LE_6B15D010 EC6B10209730 6LBSH1

Luminous Intensity Polar Plot

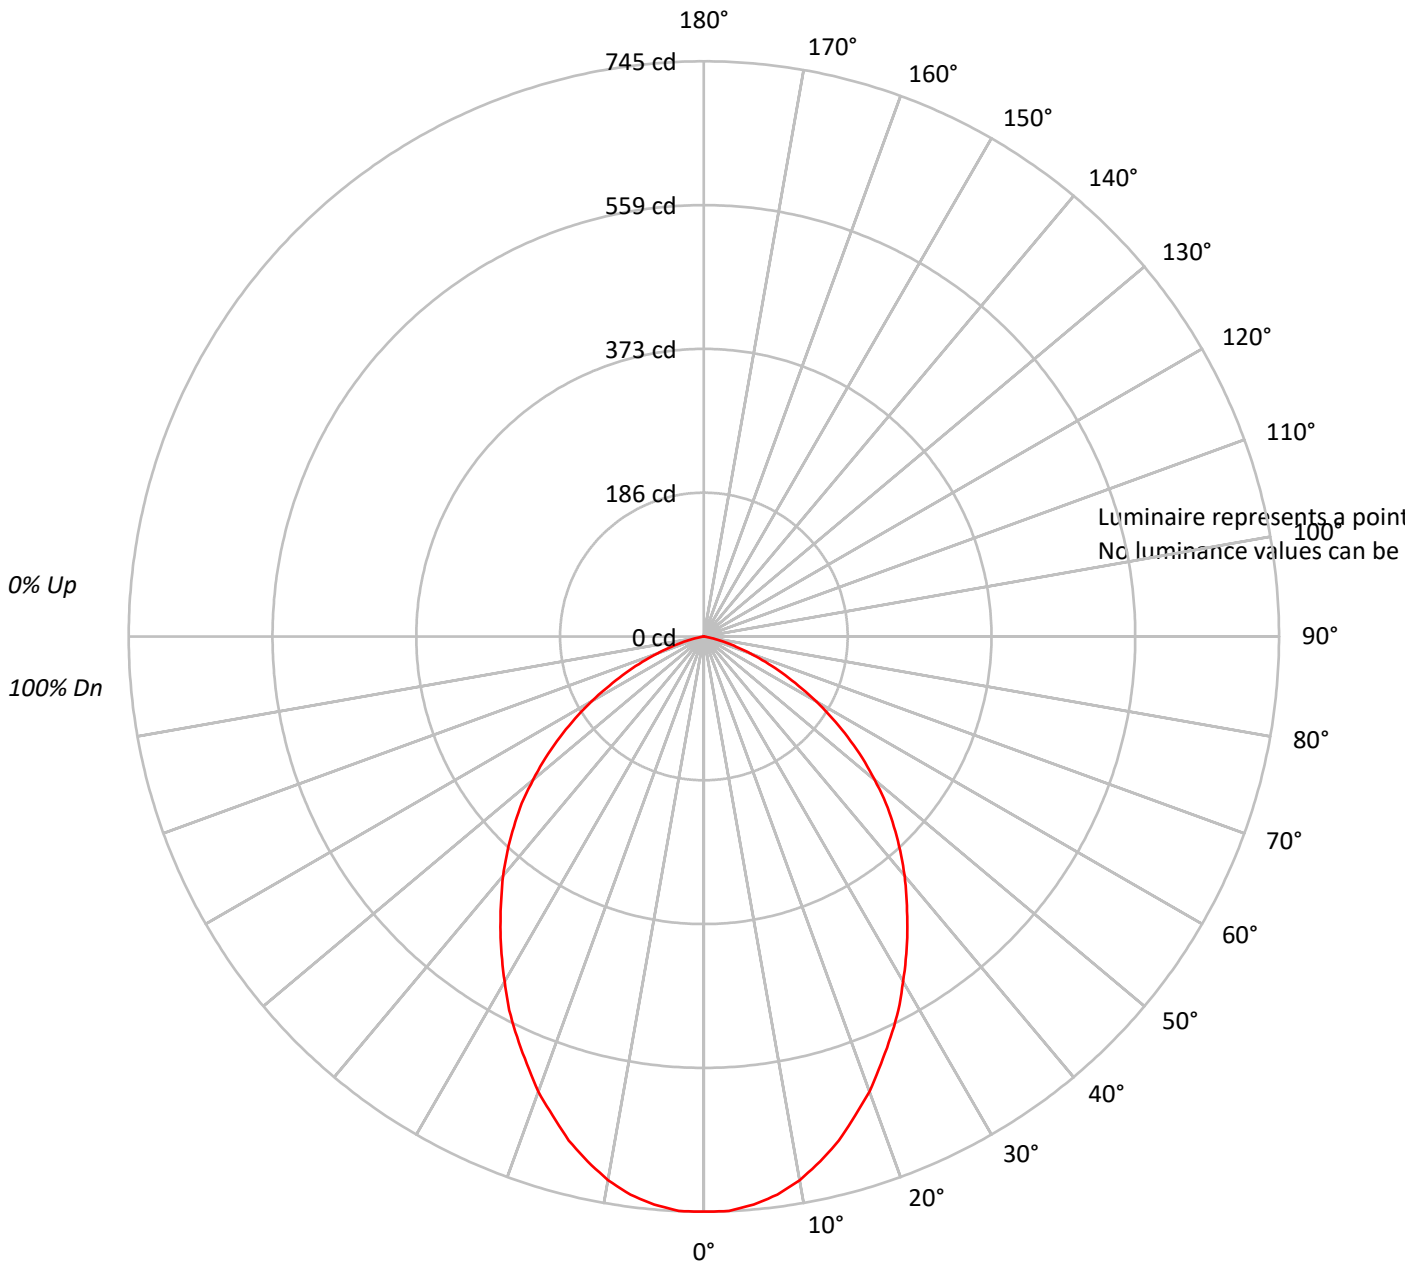



TEST NUMBER: P204161

CATALOG NUMBER: LE_6B15D010 EC6B10209730 6LBSH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204161

CATALOG NUMBER: LE_6B15D010 EC6B10209730 6LBSH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.8	4.9
10°-20°	189.6	13.3
20°-30°	263.4	18.5
30°-40°	287.4	20.2
40°-50°	268.1	18.8
50°-60°	203.5	14.3
60°-70°	111.4	7.8
70°-80°	30.6	2.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	522.8	36.7
0°-40°	810.2	56.9
0°-60°	1281.8	90.0
0°-90°	1424.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1424.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	745	
5°	739	70
15°	676	190
25°	572	263
35°	460	287
45°	348	268
55°	227	204
65°	111	111
75°	27	31
85°	0	0
90°	0	



TEST NUMBER: P204161

CATALOG NUMBER: LE_6B15D010 EC6B10209730 6LBSH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	744.9
2.5°	744.9
5°	738.6
7.5°	729.2
10°	715.1
12.5°	696.2
15°	675.9
17.5°	650.9
20°	627.2
22.5°	599.1
25°	572.4
27.5°	545.8
30°	516.0
32.5°	487.8
35°	459.5
37.5°	431.2
40°	404.6
42.5°	376.4
45°	348.1
47.5°	319.9
50°	288.5
52.5°	258.8
55°	227.4
57.5°	197.6
60°	167.8
62.5°	138.0
65°	111.4
67.5°	86.2
70°	64.2
72.5°	43.9
75°	26.6
77.5°	12.5
80°	3.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)