

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205189

Luminaire Tested: **LE\_6B15D010 EC6B10209730 6LBWLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205189  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B15D010 EC6B10209730 6LBWL1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1382.1 lumens  
Efficiency: N/A  
Efficacy: 96.7 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205189

CATALOG NUMBER: LE\_6B15D010 EC6B10209730 6LBWL11

### Luminous Intensity Polar Plot

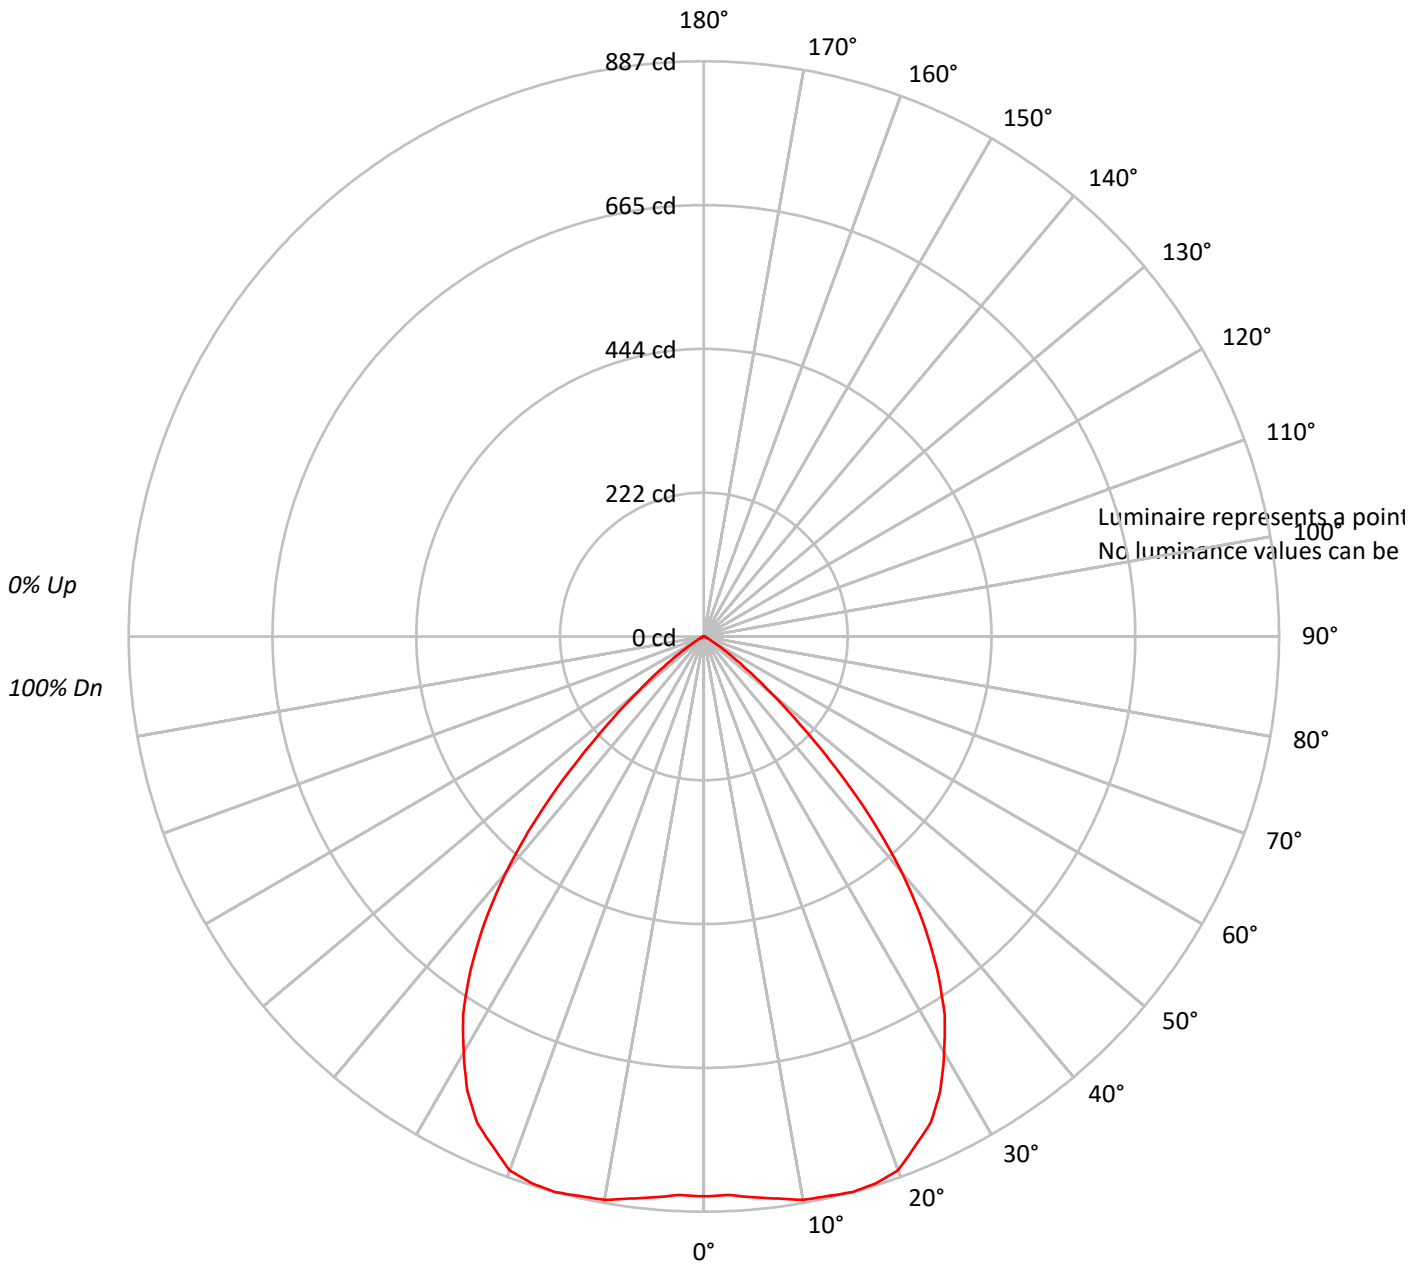



TEST NUMBER: P205189

CATALOG NUMBER: LE\_6B15D010 EC6B10209730 6LBWLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 113 | 110 | 107 | 104 | 110 | 107 | 105 | 103 | 103 | 101 | 99  | 100 | 98  | 97  | 96  | 95  | 94  | 92  |    |    |   |
| 2   | 106 | 101 | 96  | 92  | 104 | 99  | 95  | 91  | 95  | 92  | 89  | 92  | 90  | 87  | 90  | 87  | 85  | 83  |    |    |   |
| 3   | 100 | 92  | 87  | 82  | 97  | 91  | 86  | 81  | 88  | 84  | 80  | 86  | 82  | 79  | 83  | 80  | 77  | 76  |    |    |   |
| 4   | 93  | 85  | 78  | 73  | 92  | 84  | 78  | 73  | 81  | 76  | 72  | 79  | 75  | 71  | 77  | 74  | 70  | 69  |    |    |   |
| 5   | 88  | 78  | 71  | 66  | 86  | 77  | 71  | 66  | 75  | 70  | 65  | 73  | 69  | 65  | 72  | 68  | 64  | 63  |    |    |   |
| 6   | 82  | 72  | 65  | 60  | 81  | 71  | 65  | 60  | 70  | 64  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 57  |    |    |   |
| 7   | 77  | 67  | 60  | 55  | 76  | 66  | 59  | 55  | 65  | 59  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 52  |    |    |   |
| 8   | 73  | 62  | 55  | 50  | 71  | 61  | 55  | 50  | 60  | 54  | 50  | 59  | 54  | 50  | 58  | 53  | 49  | 48  |    |    |   |
| 9   | 69  | 57  | 51  | 46  | 67  | 57  | 50  | 46  | 56  | 50  | 46  | 55  | 50  | 46  | 54  | 49  | 45  | 44  |    |    |   |
| 10  | 65  | 54  | 47  | 43  | 64  | 53  | 47  | 42  | 52  | 46  | 42  | 51  | 46  | 42  | 51  | 46  | 42  | 41  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205189

CATALOG NUMBER: LE\_6B15D010 EC6B10209730 6LBWLI1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 83.3   | 6.0       |
| 10°-20°   | 250.4  | 18.1      |
| 20°-30°   | 377.4  | 27.3      |
| 30°-40°   | 386.3  | 27.9      |
| 40°-50°   | 225.0  | 16.3      |
| 50°-60°   | 51.7   | 3.7       |
| 60°-70°   | 6.4    | 0.5       |
| 70°-80°   | 1.7    | 0.1       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 711.0  | 51.4      |
| 0°-40°    | 1097.3 | 79.4      |
| 0°-60°    | 1374.0 | 99.4      |
| 0°-90°    | 1382.1 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1382.1 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 863 |      |
| 5°  | 868 | 83   |
| 15° | 887 | 250  |
| 25° | 827 | 377  |
| 35° | 627 | 386  |
| 45° | 290 | 225  |
| 55° | 50  | 52   |
| 65° | 5   | 6    |
| 75° | 2   | 2    |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P205189

CATALOG NUMBER: LE\_6B15D010 EC6B10209730 6LBWLI1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 863.4 |
| 2.5°  | 861.9 |
| 5°    | 868.1 |
| 7.5°  | 874.4 |
| 10°   | 882.1 |
| 12.5° | 883.8 |
| 15°   | 886.9 |
| 17.5° | 883.8 |
| 20°   | 875.9 |
| 22.5° | 850.9 |
| 25°   | 827.4 |
| 27.5° | 789.8 |
| 30°   | 741.1 |
| 32.5° | 691.0 |
| 35°   | 626.8 |
| 37.5° | 554.8 |
| 40°   | 474.8 |
| 42.5° | 385.5 |
| 45°   | 289.9 |
| 47.5° | 202.1 |
| 50°   | 133.2 |
| 52.5° | 84.6  |
| 55°   | 50.1  |
| 57.5° | 26.6  |
| 60°   | 14.1  |
| 62.5° | 7.9   |
| 65°   | 4.8   |
| 67.5° | 4.8   |
| 70°   | 3.1   |
| 72.5° | 1.6   |
| 75°   | 1.6   |
| 77.5° | 1.6   |
| 80°   | 0.0   |
| 82.5° | 0.0   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)