

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204772

Luminaire Tested: **LE\_6B15D010 EC6B10208040 6LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204772  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B15D010 EC6B10208040 6LBCSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2085.3 lumens  
Efficiency: N/A  
Efficacy: 145.8 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204772

CATALOG NUMBER: LE\_6B15D010 EC6B10208040 6LBCSMW1

### Luminous Intensity Polar Plot

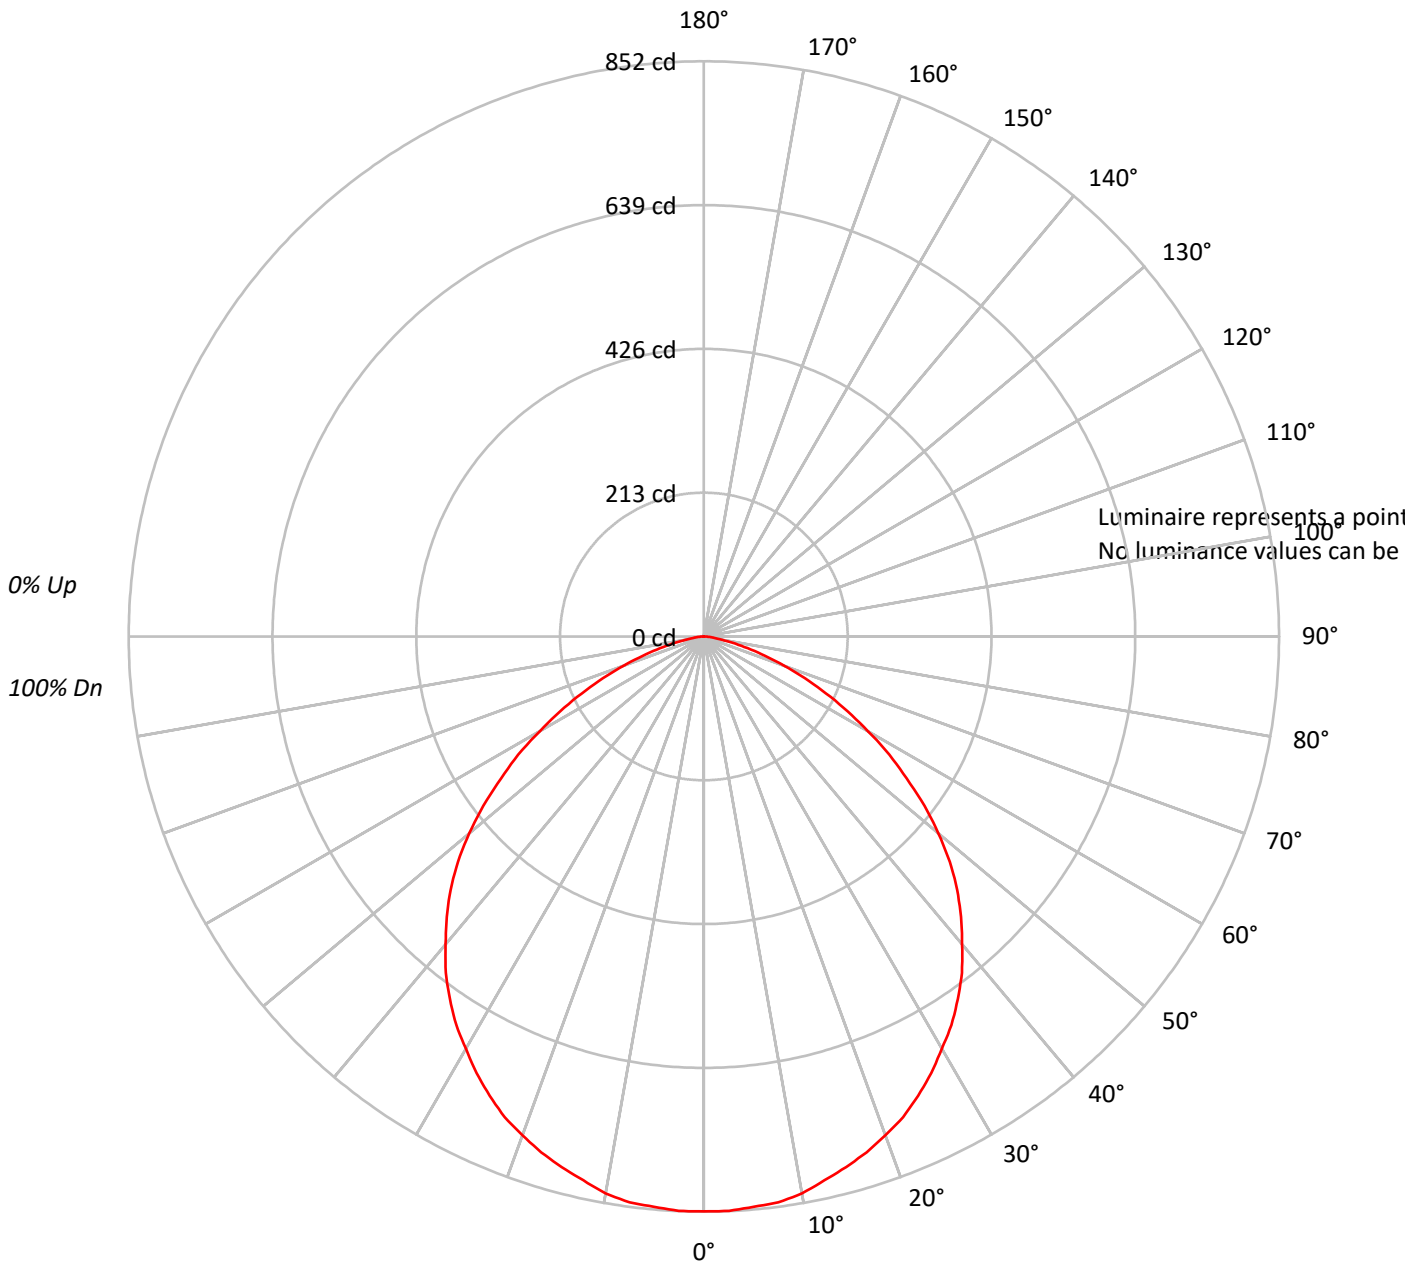



TEST NUMBER: P204772

CATALOG NUMBER: LE\_6B15D010 EC6B10208040 6LBCSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74			
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63			
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55			
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48			
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42			
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37			
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33			
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30			
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204772

CATALOG NUMBER: LE\_6B15D010 EC6B10208040 6LBCSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	80.7	3.9
10°-20°	229.7	11.0
20°-30°	345.6	16.6
30°-40°	409.6	19.6
40°-50°	407.6	19.5
50°-60°	328.6	15.8
60°-70°	198.8	9.5
70°-80°	73.8	3.5
80°-90°	11.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	656.0	31.5
0°-40°	1065.6	51.1
0°-60°	1801.7	86.4
0°-90°	2085.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2085.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	852	
5°	848	81
15°	814	230
25°	751	346
35°	656	410
45°	531	408
55°	366	329
65°	200	199
75°	67	74
85°	9	11
90°	0	



TEST NUMBER: P204772

CATALOG NUMBER: LE\_6B15D010 EC6B10208040 6LBCSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	851.6
2.5°	851.6
5°	847.9
7.5°	845.4
10°	837.8
12.5°	825.1
15°	813.8
17.5°	801.1
20°	786.0
22.5°	770.9
25°	750.6
27.5°	729.1
30°	705.1
32.5°	682.4
35°	655.9
37.5°	628.0
40°	595.1
42.5°	563.6
45°	530.8
47.5°	494.1
50°	453.6
52.5°	412.0
55°	366.5
57.5°	326.0
60°	280.5
62.5°	240.1
65°	199.6
67.5°	161.8
70°	126.4
72.5°	94.8
75°	67.0
77.5°	43.0
80°	25.2
82.5°	15.1
85°	8.9
87.5°	3.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)