

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204881

Luminaire Tested: **LE_6B15D010 EC6B10209040 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204881
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209040 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1476.2 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204881

CATALOG NUMBER: LE_6B15D010 EC6B10209040 6LBCSMB1

Luminous Intensity Polar Plot

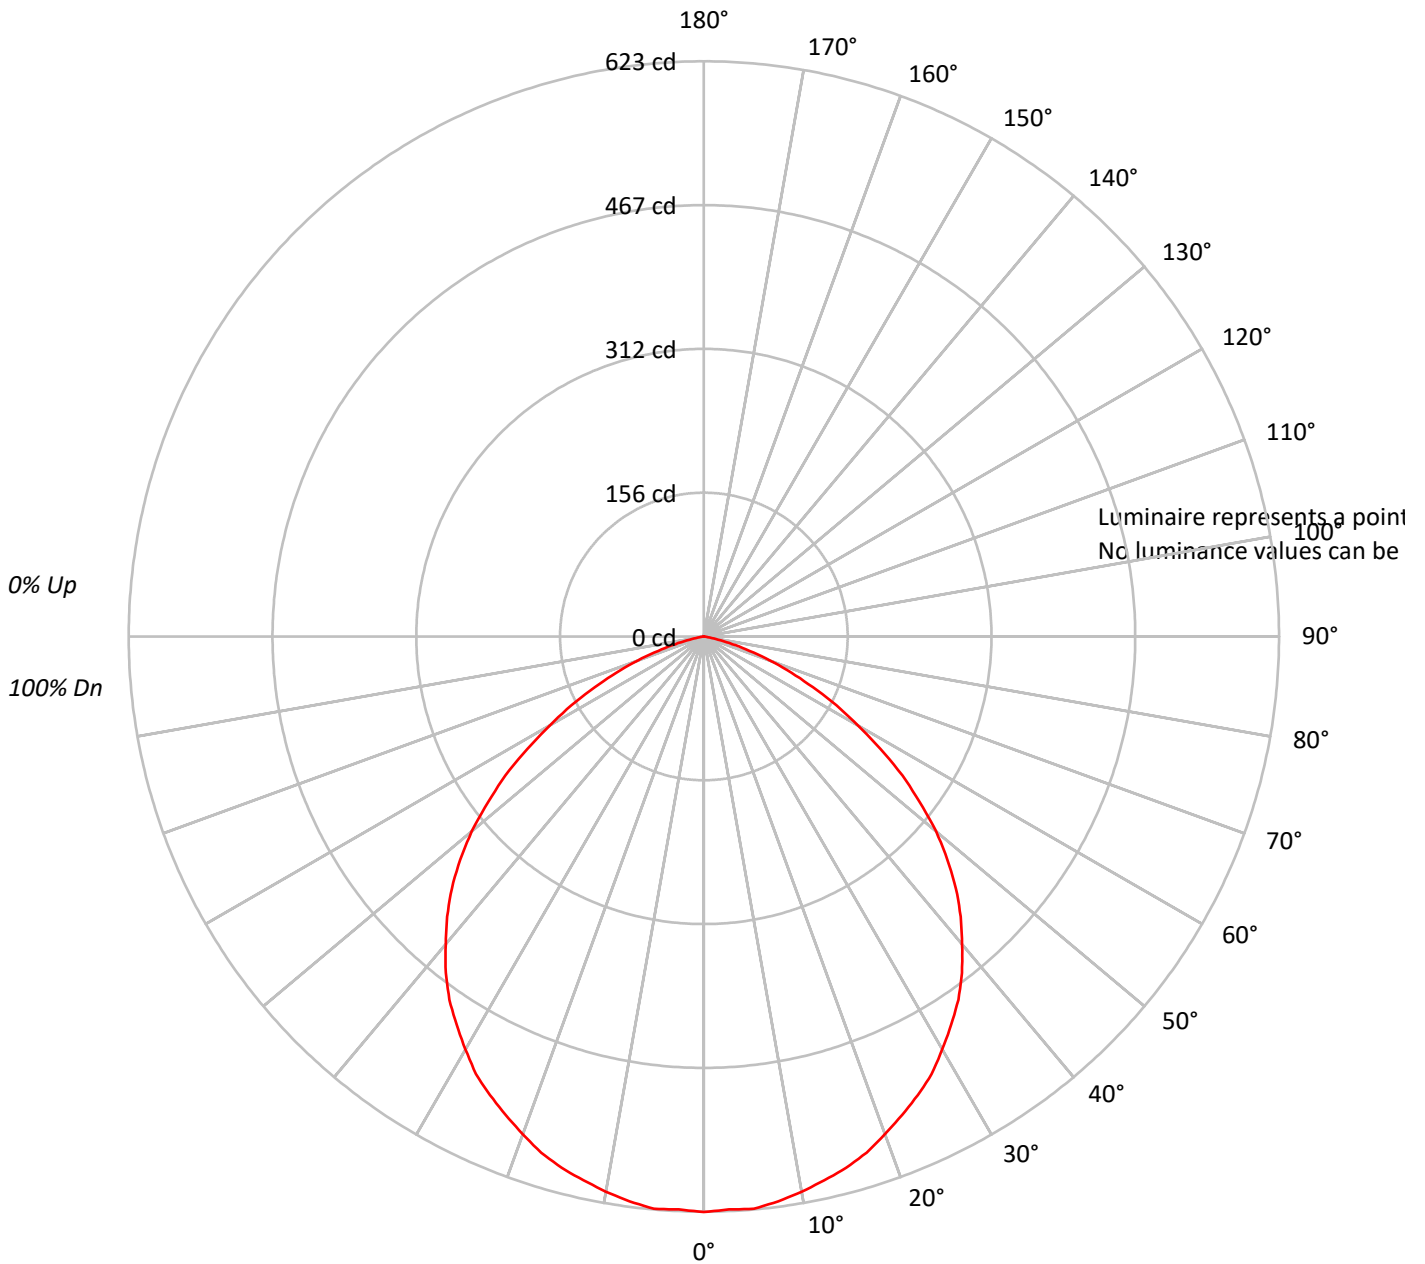



TEST NUMBER: P204881

CATALOG NUMBER: LE_6B15D010 EC6B10209040 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88				88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75				75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65				65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56				56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49				49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43				43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39				39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35				35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31				31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28				28

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204881

CATALOG NUMBER: LE_6B15D010 EC6B10209040 6LBCSMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.0	4.0
10°-20°	168.0	11.4
20°-30°	252.5	17.1
30°-40°	299.6	20.3
40°-50°	296.5	20.1
50°-60°	232.9	15.8
60°-70°	130.5	8.8
70°-80°	36.7	2.5
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	479.4	32.5
0°-40°	779.0	52.8
0°-60°	1308.4	88.6
0°-90°	1476.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1476.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	623	
5°	622	59
15°	596	168
25°	548	252
35°	480	300
45°	386	296
55°	262	233
65°	130	131
75°	32	37
85°	0	1
90°	0	



TEST NUMBER: P204881

CATALOG NUMBER: LE_6B15D010 EC6B10209040 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	623.4
2.5°	621.2
5°	622.2
7.5°	617.0
10°	610.6
12.5°	603.2
15°	595.8
17.5°	586.2
20°	573.6
22.5°	560.9
25°	548.1
27.5°	534.4
30°	516.4
32.5°	498.5
35°	480.5
37.5°	459.2
40°	435.0
42.5°	411.6
45°	386.2
47.5°	357.8
50°	328.1
52.5°	294.2
55°	262.5
57.5°	226.5
60°	192.6
62.5°	161.9
65°	130.1
67.5°	102.6
70°	76.2
72.5°	51.9
75°	31.8
77.5°	15.9
80°	4.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)