

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203231

Luminaire Tested: **LE\_6B15D010 EC6B10209040 6LBMH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203231  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B15D010 EC6B10209040 6LBMH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1162.6 lumens  
Efficiency: N/A  
Efficacy: 81.3 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203231  
CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBMH1

### Luminous Intensity Polar Plot

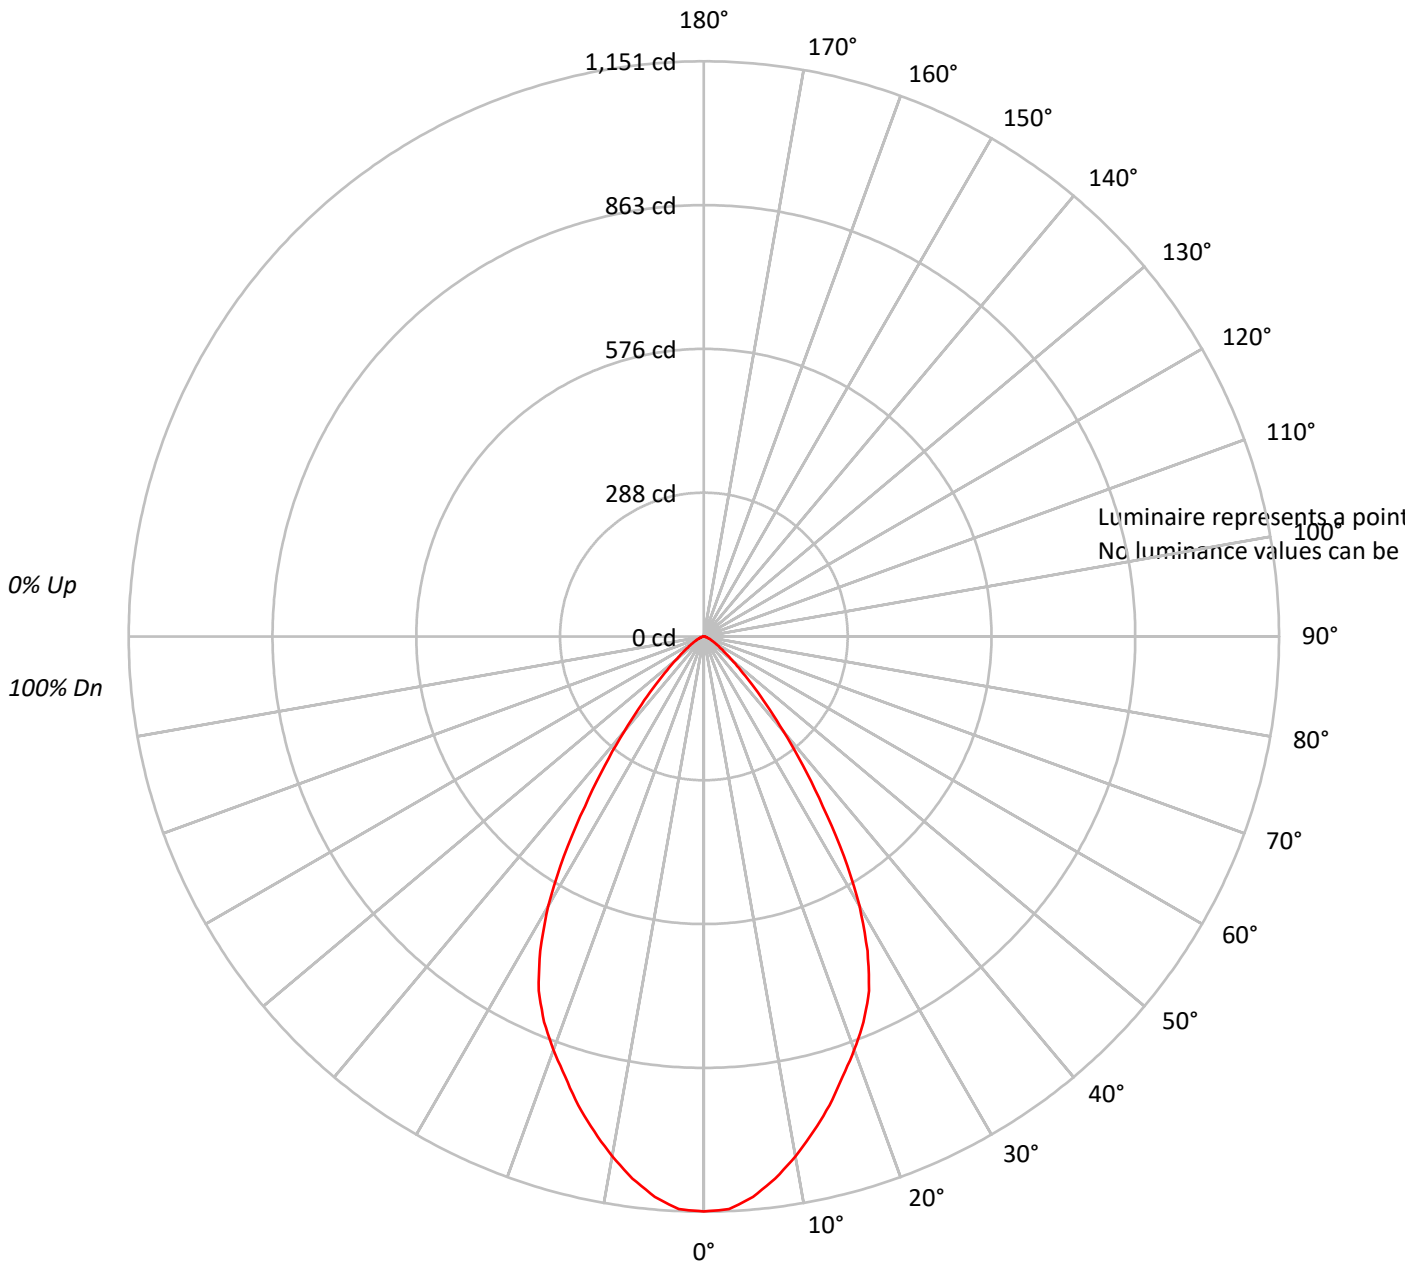



TEST NUMBER: P203231

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBMH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 92  |    |    |   |
| 2   | 107 | 102 | 97  | 93  | 105 | 100 | 96  | 92  | 97  | 93  | 90  | 94  | 91  | 88  | 91  | 89  | 87  | 85  |    |    |   |
| 3   | 101 | 94  | 88  | 84  | 99  | 92  | 88  | 84  | 90  | 86  | 82  | 87  | 84  | 81  | 85  | 82  | 80  | 78  |    |    |   |
| 4   | 95  | 87  | 81  | 76  | 93  | 86  | 80  | 76  | 84  | 79  | 75  | 82  | 78  | 74  | 80  | 76  | 73  | 72  |    |    |   |
| 5   | 90  | 81  | 75  | 70  | 88  | 80  | 74  | 70  | 78  | 73  | 69  | 76  | 72  | 68  | 75  | 71  | 68  | 66  |    |    |   |
| 6   | 85  | 75  | 69  | 64  | 83  | 75  | 69  | 64  | 73  | 68  | 64  | 72  | 67  | 63  | 70  | 66  | 63  | 61  |    |    |   |
| 7   | 80  | 70  | 64  | 59  | 79  | 70  | 64  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 66  | 62  | 58  | 57  |    |    |   |
| 8   | 76  | 66  | 60  | 55  | 75  | 65  | 59  | 55  | 64  | 59  | 55  | 63  | 58  | 55  | 62  | 58  | 54  | 53  |    |    |   |
| 9   | 72  | 62  | 56  | 51  | 71  | 61  | 55  | 51  | 60  | 55  | 51  | 60  | 55  | 51  | 59  | 54  | 51  | 49  |    |    |   |
| 10  | 69  | 58  | 52  | 48  | 68  | 58  | 52  | 48  | 57  | 52  | 48  | 56  | 51  | 48  | 55  | 51  | 48  | 46  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203231

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBMH1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 105.2  | 9.0       |
| 10°-20°   | 272.2  | 23.4      |
| 20°-30°   | 352.7  | 30.3      |
| 30°-40°   | 261.8  | 22.5      |
| 40°-50°   | 110.5  | 9.5       |
| 50°-60°   | 39.2   | 3.4       |
| 60°-70°   | 15.1   | 1.3       |
| 70°-80°   | 5.2    | 0.5       |
| 80°-90°   | 0.7    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 730.0  | 62.8      |
| 0°-40°    | 991.8  | 85.3      |
| 0°-60°    | 1141.6 | 98.2      |
| 0°-90°    | 1162.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1162.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1151 |      |
| 5°  | 1126 | 105  |
| 15° | 971  | 272  |
| 25° | 782  | 353  |
| 35° | 415  | 262  |
| 45° | 136  | 110  |
| 55° | 42   | 39   |
| 65° | 15   | 15   |
| 75° | 5    | 5    |
| 85° | 0    | 1    |
| 90° | 0    |      |



TEST NUMBER: P203231

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBMH1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1150.6 |
| 2.5°  | 1147.2 |
| 5°    | 1125.8 |
| 7.5°  | 1094.1 |
| 10°   | 1056.0 |
| 12.5° | 1014.5 |
| 15°   | 971.2  |
| 17.5° | 923.1  |
| 20°   | 880.0  |
| 22.5° | 835.1  |
| 25°   | 782.0  |
| 27.5° | 709.0  |
| 30°   | 622.6  |
| 32.5° | 521.4  |
| 35°   | 415.1  |
| 37.5° | 325.4  |
| 40°   | 247.4  |
| 42.5° | 184.2  |
| 45°   | 136.1  |
| 47.5° | 99.6   |
| 50°   | 73.0   |
| 52.5° | 54.8   |
| 55°   | 41.5   |
| 57.5° | 31.5   |
| 60°   | 24.9   |
| 62.5° | 18.2   |
| 65°   | 15.0   |
| 67.5° | 11.6   |
| 70°   | 8.2    |
| 72.5° | 6.6    |
| 75°   | 5.0    |
| 77.5° | 3.4    |
| 80°   | 1.6    |
| 82.5° | 1.6    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)