

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202716

Luminaire Tested: **LE\_6B15D010 EC6B10209040 6LBWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202716  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B15D010 EC6B10209040 6LBWH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1406.9 lumens  
Efficiency: N/A  
Efficacy: 98.4 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202716

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBWH1

### Luminous Intensity Polar Plot

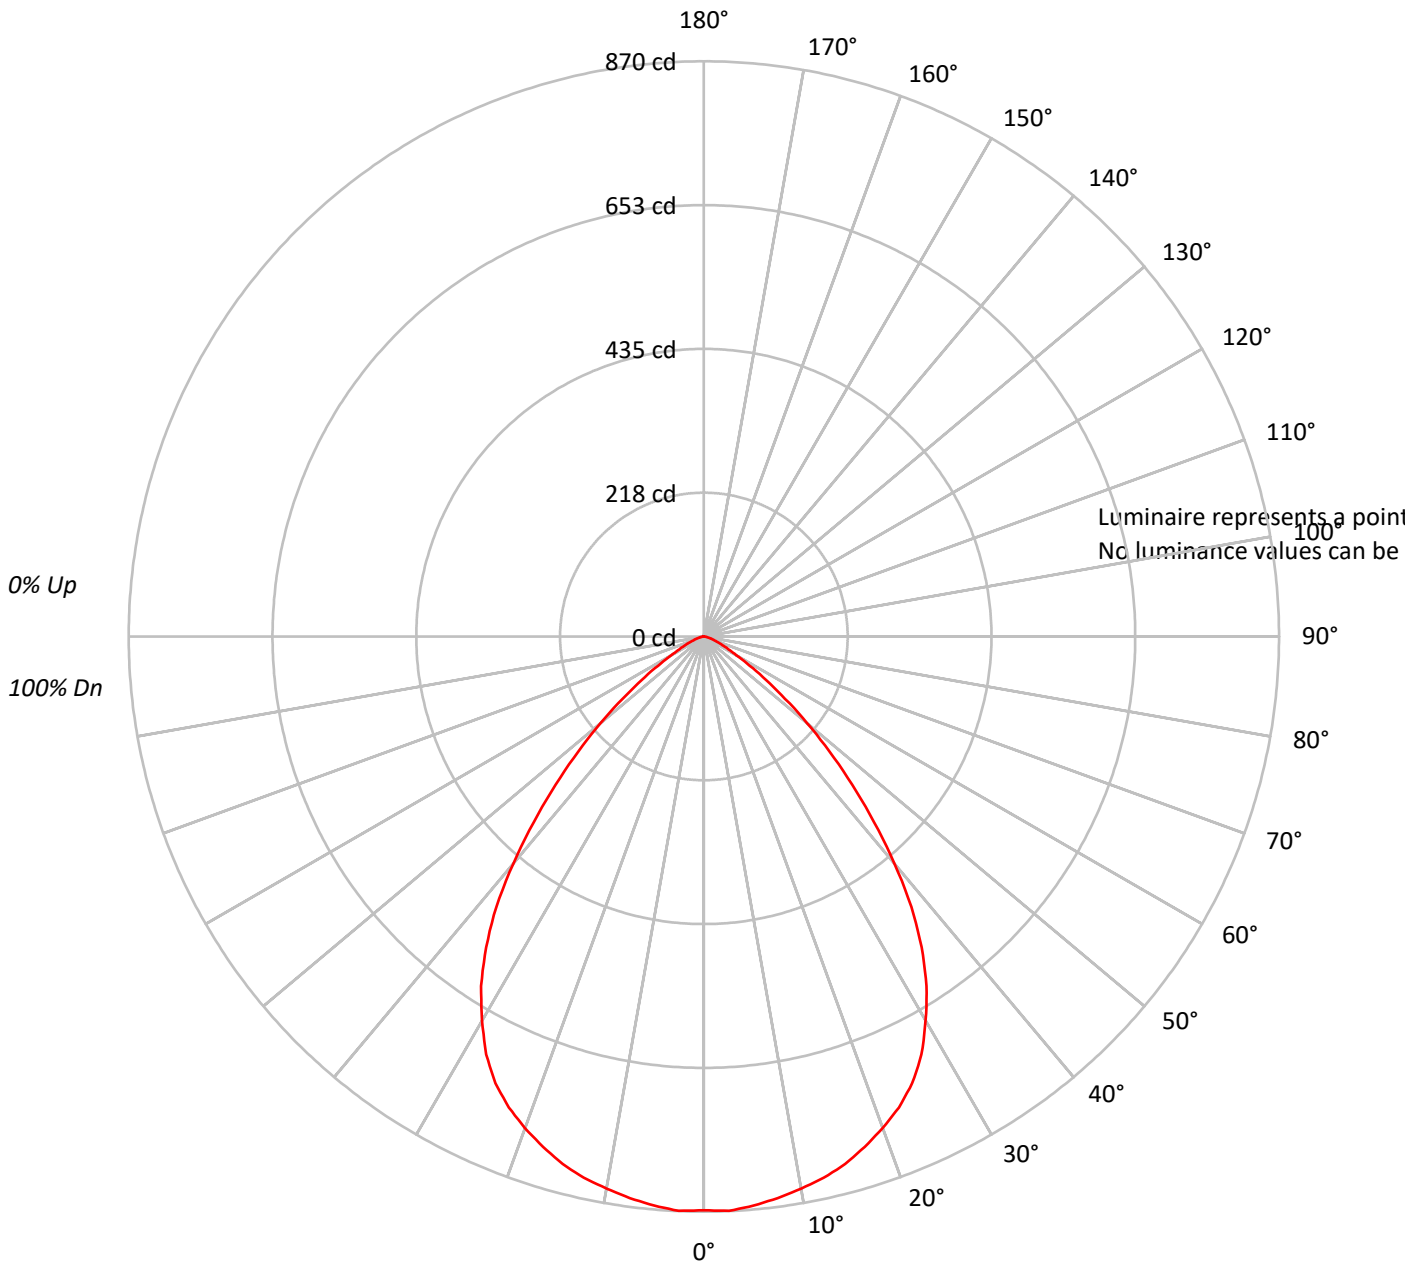



TEST NUMBER: P202716

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 103 | 100 | 98  | 99  | 97  | 95  | 95  | 94  | 93  | 91  |    |    |   |
| 2   | 105 | 99  | 94  | 90  | 103 | 97  | 93  | 89  | 94  | 90  | 87  | 91  | 88  | 85  | 88  | 85  | 83  | 81  |    |    |   |
| 3   | 98  | 90  | 84  | 79  | 96  | 89  | 83  | 78  | 86  | 81  | 77  | 83  | 79  | 76  | 81  | 78  | 75  | 73  |    |    |   |
| 4   | 92  | 82  | 75  | 70  | 90  | 81  | 75  | 70  | 79  | 73  | 69  | 77  | 72  | 68  | 75  | 71  | 67  | 65  |    |    |   |
| 5   | 86  | 75  | 68  | 63  | 84  | 74  | 68  | 63  | 72  | 66  | 62  | 71  | 65  | 61  | 69  | 64  | 61  | 59  |    |    |   |
| 6   | 80  | 69  | 62  | 57  | 78  | 68  | 61  | 56  | 67  | 61  | 56  | 65  | 60  | 56  | 64  | 59  | 55  | 53  |    |    |   |
| 7   | 75  | 64  | 56  | 51  | 73  | 63  | 56  | 51  | 62  | 55  | 51  | 60  | 55  | 51  | 59  | 54  | 50  | 49  |    |    |   |
| 8   | 70  | 59  | 52  | 47  | 69  | 58  | 51  | 47  | 57  | 51  | 46  | 56  | 50  | 46  | 55  | 50  | 46  | 44  |    |    |   |
| 9   | 66  | 55  | 48  | 43  | 65  | 54  | 47  | 43  | 53  | 47  | 43  | 52  | 47  | 42  | 51  | 46  | 42  | 41  |    |    |   |
| 10  | 62  | 51  | 44  | 40  | 61  | 50  | 44  | 39  | 50  | 43  | 39  | 49  | 43  | 39  | 48  | 43  | 39  | 38  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202716

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBWH1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 82.0   | 5.8       |
| 10°-20°   | 232.6  | 16.5      |
| 20°-30°   | 341.0  | 24.2      |
| 30°-40°   | 354.9  | 25.2      |
| 40°-50°   | 245.5  | 17.5      |
| 50°-60°   | 106.9  | 7.6       |
| 60°-70°   | 32.8   | 2.3       |
| 70°-80°   | 9.8    | 0.7       |
| 80°-90°   | 1.5    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 655.5  | 46.6      |
| 0°-40°    | 1010.4 | 71.8      |
| 0°-60°    | 1362.8 | 96.9      |
| 0°-90°    | 1406.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1406.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 868 |      |
| 5°  | 864 | 82   |
| 15° | 826 | 233  |
| 25° | 746 | 341  |
| 35° | 574 | 355  |
| 45° | 317 | 246  |
| 55° | 115 | 107  |
| 65° | 31  | 33   |
| 75° | 9   | 10   |
| 85° | 2   | 2    |
| 90° | 0   |      |



TEST NUMBER: P202716

CATALOG NUMBER: LE\_6B15D010 EC6B10209040 6LBWH1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 867.8 |
| 2.5°  | 869.6 |
| 5°    | 864.1 |
| 7.5°  | 856.8 |
| 10°   | 847.8 |
| 12.5° | 838.6 |
| 15°   | 825.9 |
| 17.5° | 809.4 |
| 20°   | 791.1 |
| 22.5° | 771.1 |
| 25°   | 745.6 |
| 27.5° | 712.8 |
| 30°   | 670.9 |
| 32.5° | 627.1 |
| 35°   | 574.2 |
| 37.5° | 515.9 |
| 40°   | 448.5 |
| 42.5° | 381.0 |
| 45°   | 317.2 |
| 47.5° | 257.0 |
| 50°   | 204.1 |
| 52.5° | 155.0 |
| 55°   | 114.9 |
| 57.5° | 82.0  |
| 60°   | 56.5  |
| 62.5° | 41.9  |
| 65°   | 31.0  |
| 67.5° | 23.8  |
| 70°   | 16.4  |
| 72.5° | 12.8  |
| 75°   | 9.1   |
| 77.5° | 5.5   |
| 80°   | 3.6   |
| 82.5° | 1.9   |
| 85°   | 1.9   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)