

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204787

Luminaire Tested: **LE_6B20D010 EC6B10209024 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204787
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10209024 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2021.6 lumens
Efficiency: N/A
Efficacy: 97.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204787

CATALOG NUMBER: LE_6B20D010 EC6B10209024 6LBCSMW1

Luminous Intensity Polar Plot

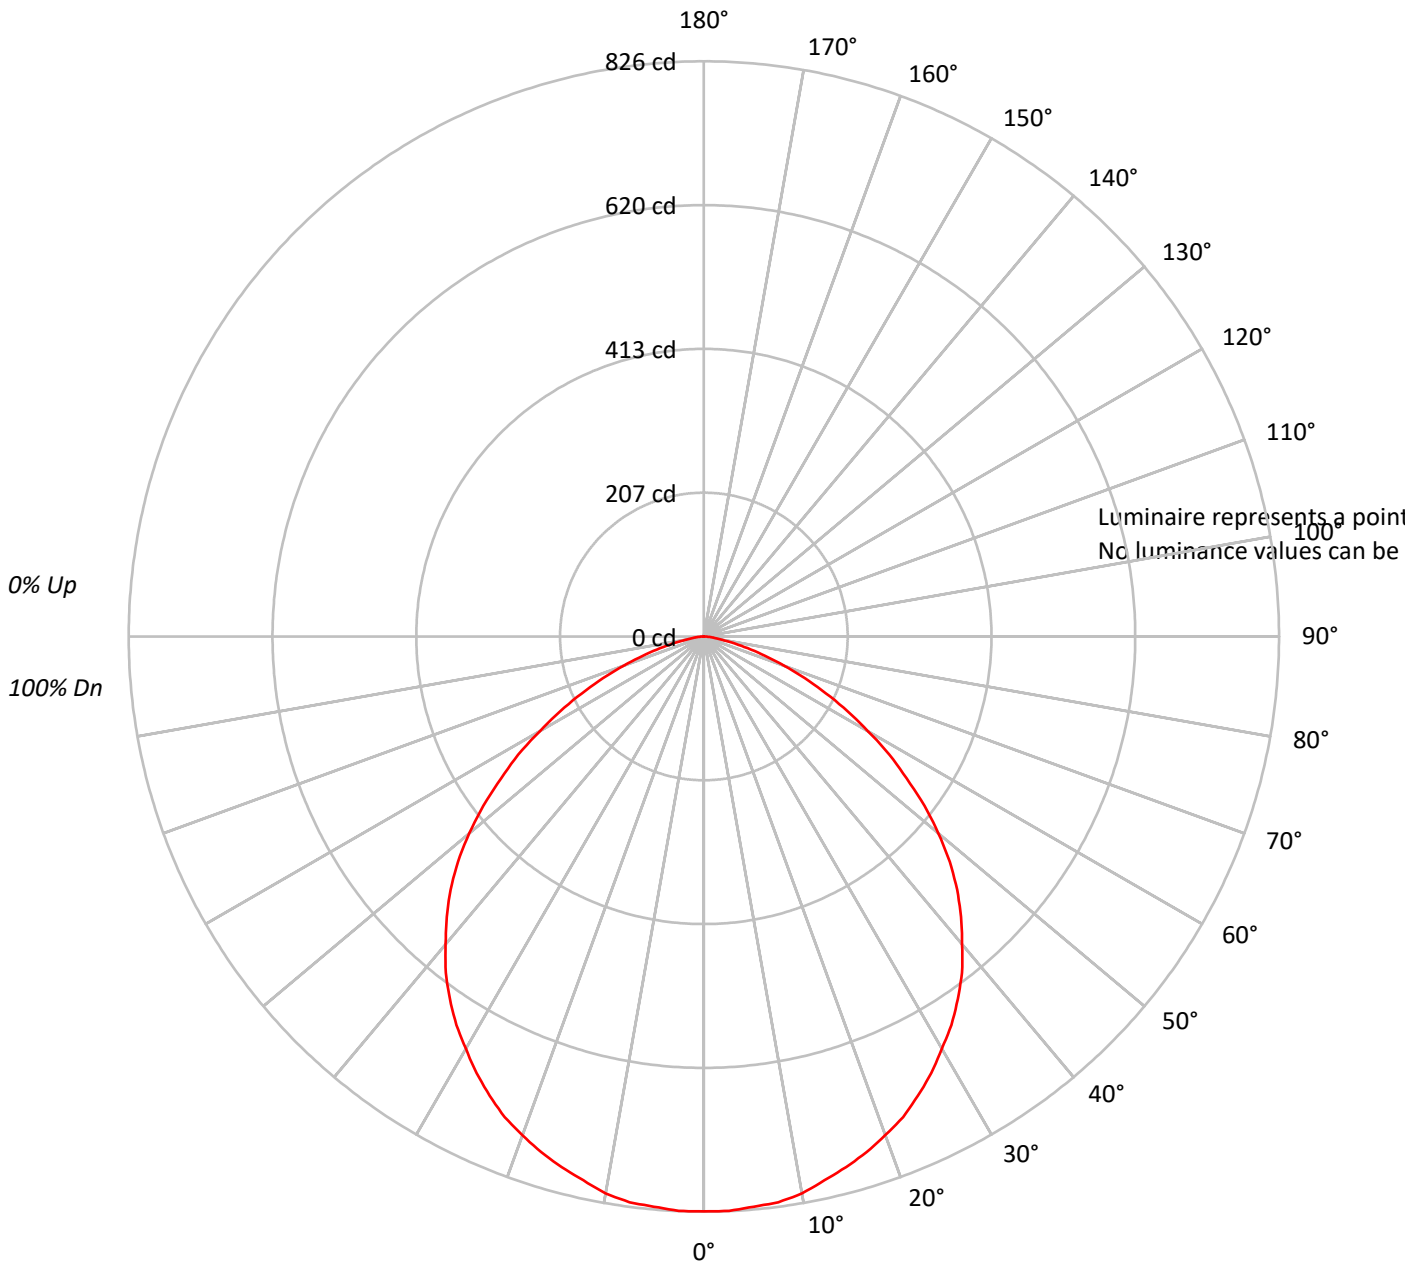



TEST NUMBER: P204787

CATALOG NUMBER: LE_6B20D010 EC6B10209024 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204787

CATALOG NUMBER: LE_6B20D010 EC6B10209024 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.2	3.9
10°-20°	222.7	11.0
20°-30°	335.0	16.6
30°-40°	397.1	19.6
40°-50°	395.1	19.5
50°-60°	318.5	15.8
60°-70°	192.7	9.5
70°-80°	71.5	3.5
80°-90°	10.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	636.0	31.5
0°-40°	1033.0	51.1
0°-60°	1746.7	86.4
0°-90°	2021.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2021.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	826	
5°	822	78
15°	789	223
25°	728	335
35°	636	397
45°	514	395
55°	355	319
65°	194	193
75°	65	72
85°	9	11
90°	0	



TEST NUMBER: P204787

CATALOG NUMBER: LE_6B20D010 EC6B10209024 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	825.6
2.5°	825.6
5°	822.0
7.5°	819.5
10°	812.2
12.5°	800.0
15°	788.9
17.5°	776.6
20°	762.0
22.5°	747.2
25°	727.6
27.5°	706.9
30°	683.6
32.5°	661.5
35°	635.8
37.5°	608.9
40°	577.0
42.5°	546.4
45°	514.5
47.5°	479.0
50°	439.8
52.5°	399.4
55°	355.2
57.5°	316.1
60°	272.0
62.5°	232.8
65°	193.5
67.5°	156.8
70°	122.5
72.5°	91.9
75°	64.9
77.5°	41.6
80°	24.5
82.5°	14.8
85°	8.6
87.5°	3.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)