

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202926

Luminaire Tested: **LE\_6B20D010 EC6B10208027 6LBWGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202926  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B20D010 EC6B10208027 6LBWGPH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1622.5 lumens  
Efficiency: N/A  
Efficacy: 78.0 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202926

CATALOG NUMBER: LE\_6B20D010 EC6B10208027 6LBWGPH1

### Luminous Intensity Polar Plot

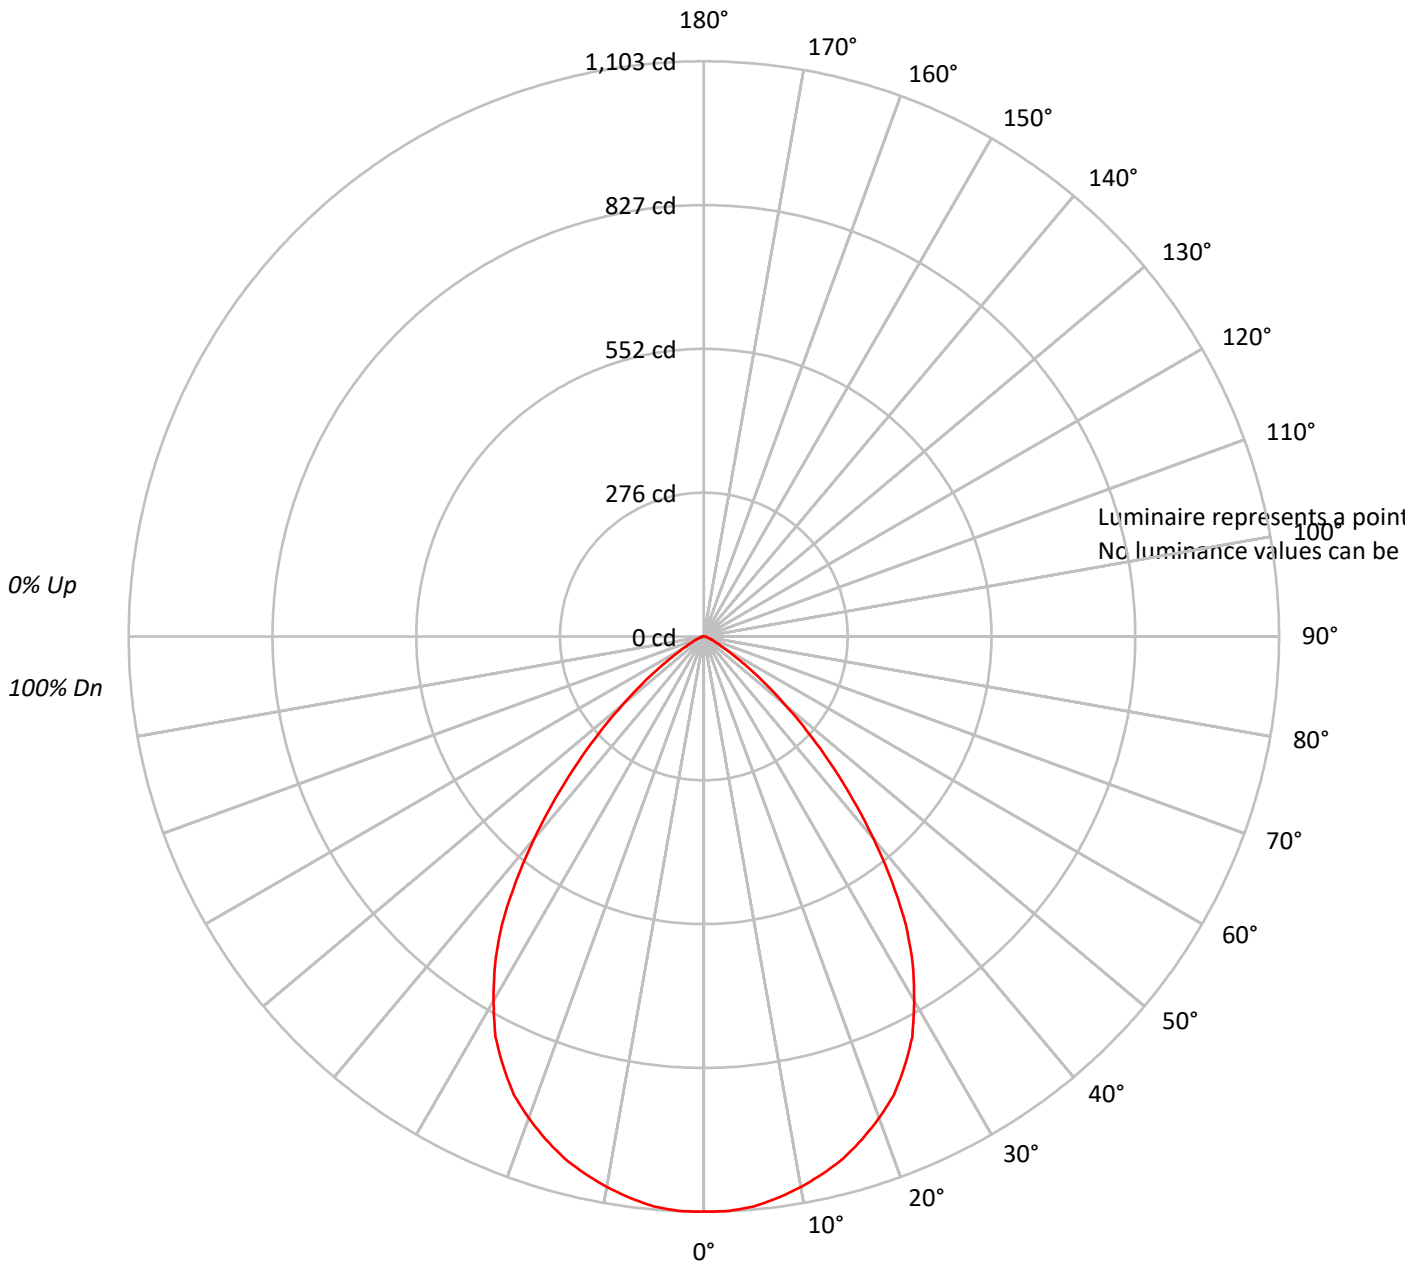



TEST NUMBER: P202926

CATALOG NUMBER: LE\_6B20D010 EC6B10208027 6LBWGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91				91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82				82
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74				74
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67				67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61				61
6	81	71	64	59	80	70	63	58	68	62	58	67	62	58	65	61	57	56				56
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51				51
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47				47
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43				43
10	64	53	46	42	63	52	46	42	51	45	41	51	45	41	50	45	41	40				40

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202926

CATALOG NUMBER: LE\_6B20D010 EC6B10208027 6LBWGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	103.9	6.4
10°-20°	291.3	18.0
20°-30°	416.8	25.7
30°-40°	415.4	25.6
40°-50°	264.6	16.3
50°-60°	97.5	6.0
60°-70°	24.5	1.5
70°-80°	7.4	0.5
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	812.0	50.0
0°-40°	1227.4	75.6
0°-60°	1589.5	98.0
0°-90°	1622.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1622.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1103	
5°	1097	104
15°	1036	291
25°	910	417
35°	676	415
45°	341	265
55°	103	98
65°	22	24
75°	6	7
85°	0	1
90°	0	



TEST NUMBER: P202926

CATALOG NUMBER: LE\_6B20D010 EC6B10208027 6LBWGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1102.8
2.5°	1102.8
5°	1097.1
7.5°	1086.0
10°	1072.0
12.5°	1055.2
15°	1035.8
17.5°	1010.6
20°	982.6
22.5°	952.0
25°	910.1
27.5°	865.4
30°	806.8
32.5°	745.4
35°	675.6
37.5°	591.9
40°	505.2
42.5°	421.5
45°	340.6
47.5°	268.0
50°	201.0
52.5°	148.0
55°	103.2
57.5°	67.0
60°	44.6
62.5°	30.8
65°	22.4
67.5°	16.8
70°	14.0
72.5°	8.4
75°	5.6
77.5°	5.6
80°	2.8
82.5°	2.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)