

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203658

Luminaire Tested: **LE\_6B20D010 EC6B10209727 6LBNH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203658  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B20D010 EC6B10209727 6LBNH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1144.4 lumens  
Efficiency: N/A  
Efficacy: 55.0 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203658

CATALOG NUMBER: LE\_6B20D010 EC6B10209727 6LBNH1

### Luminous Intensity Polar Plot

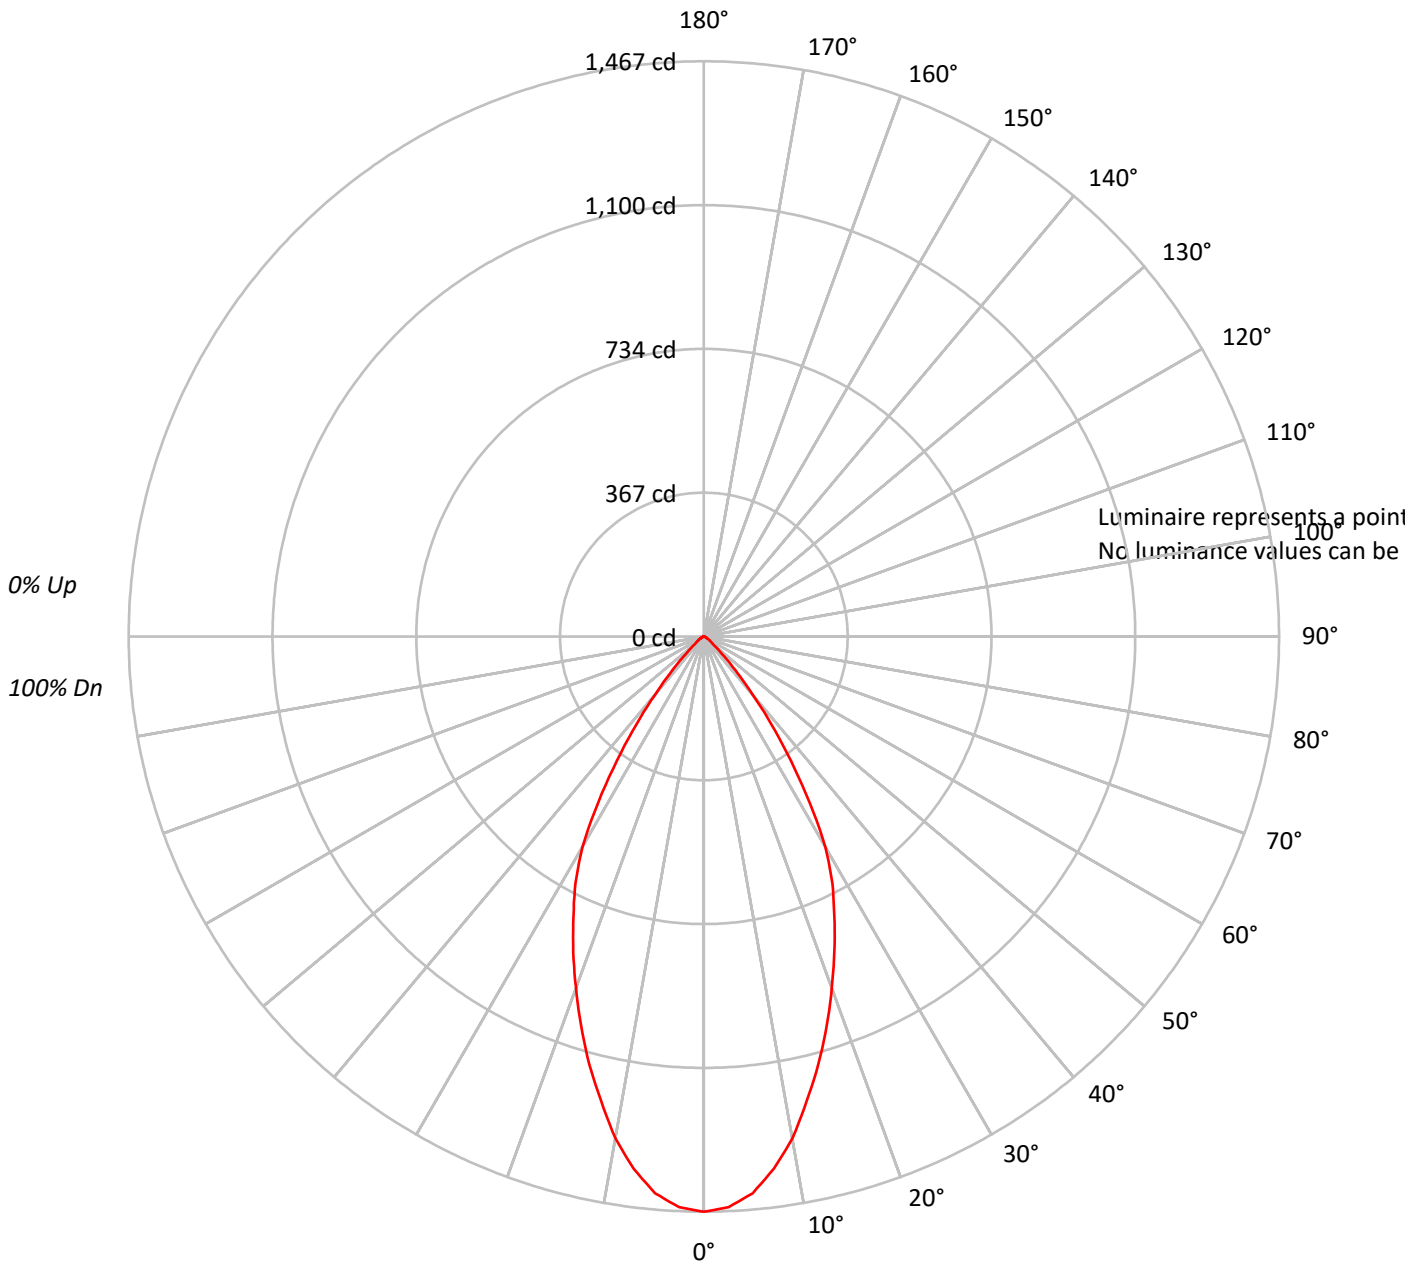



TEST NUMBER: P203658

CATALOG NUMBER: LE\_6B20D010 EC6B10209727 6LBNH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87		
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81		
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75		
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70		
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65		
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61		
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58		
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54		
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203658

CATALOG NUMBER: LE\_6B20D010 EC6B10209727 6LBNH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	131.9	11.5
10°-20°	314.6	27.5
20°-30°	360.4	31.5
30°-40°	242.2	21.2
40°-50°	69.2	6.0
50°-60°	16.9	1.5
60°-70°	6.4	0.6
70°-80°	2.5	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	807.0	70.5
0°-40°	1049.2	91.7
0°-60°	1135.3	99.2
0°-90°	1144.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1144.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1467	
5°	1425	132
15°	1129	315
25°	787	360
35°	386	242
45°	79	69
55°	19	17
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P203658

CATALOG NUMBER: LE\_6B20D010 EC6B10209727 6LBNH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1467.1
2.5°	1456.6
5°	1425.4
7.5°	1369.0
10°	1300.1
12.5°	1212.5
15°	1129.0
17.5°	1041.4
20°	953.8
22.5°	870.2
25°	786.8
27.5°	709.5
30°	619.9
32.5°	500.9
35°	386.1
37.5°	281.8
40°	194.1
42.5°	127.2
45°	79.2
47.5°	48.0
50°	29.2
52.5°	23.0
55°	18.8
57.5°	14.6
60°	10.4
62.5°	8.4
65°	6.2
67.5°	4.1
70°	4.1
72.5°	2.1
75°	2.1
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)