

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203133

Luminaire Tested: **LE_6B20D010 EC6B10208030 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203133
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10208030 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2407.9 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203133

CATALOG NUMBER: LE_6B20D010 EC6B10208030 6LBWMW1

Luminous Intensity Polar Plot

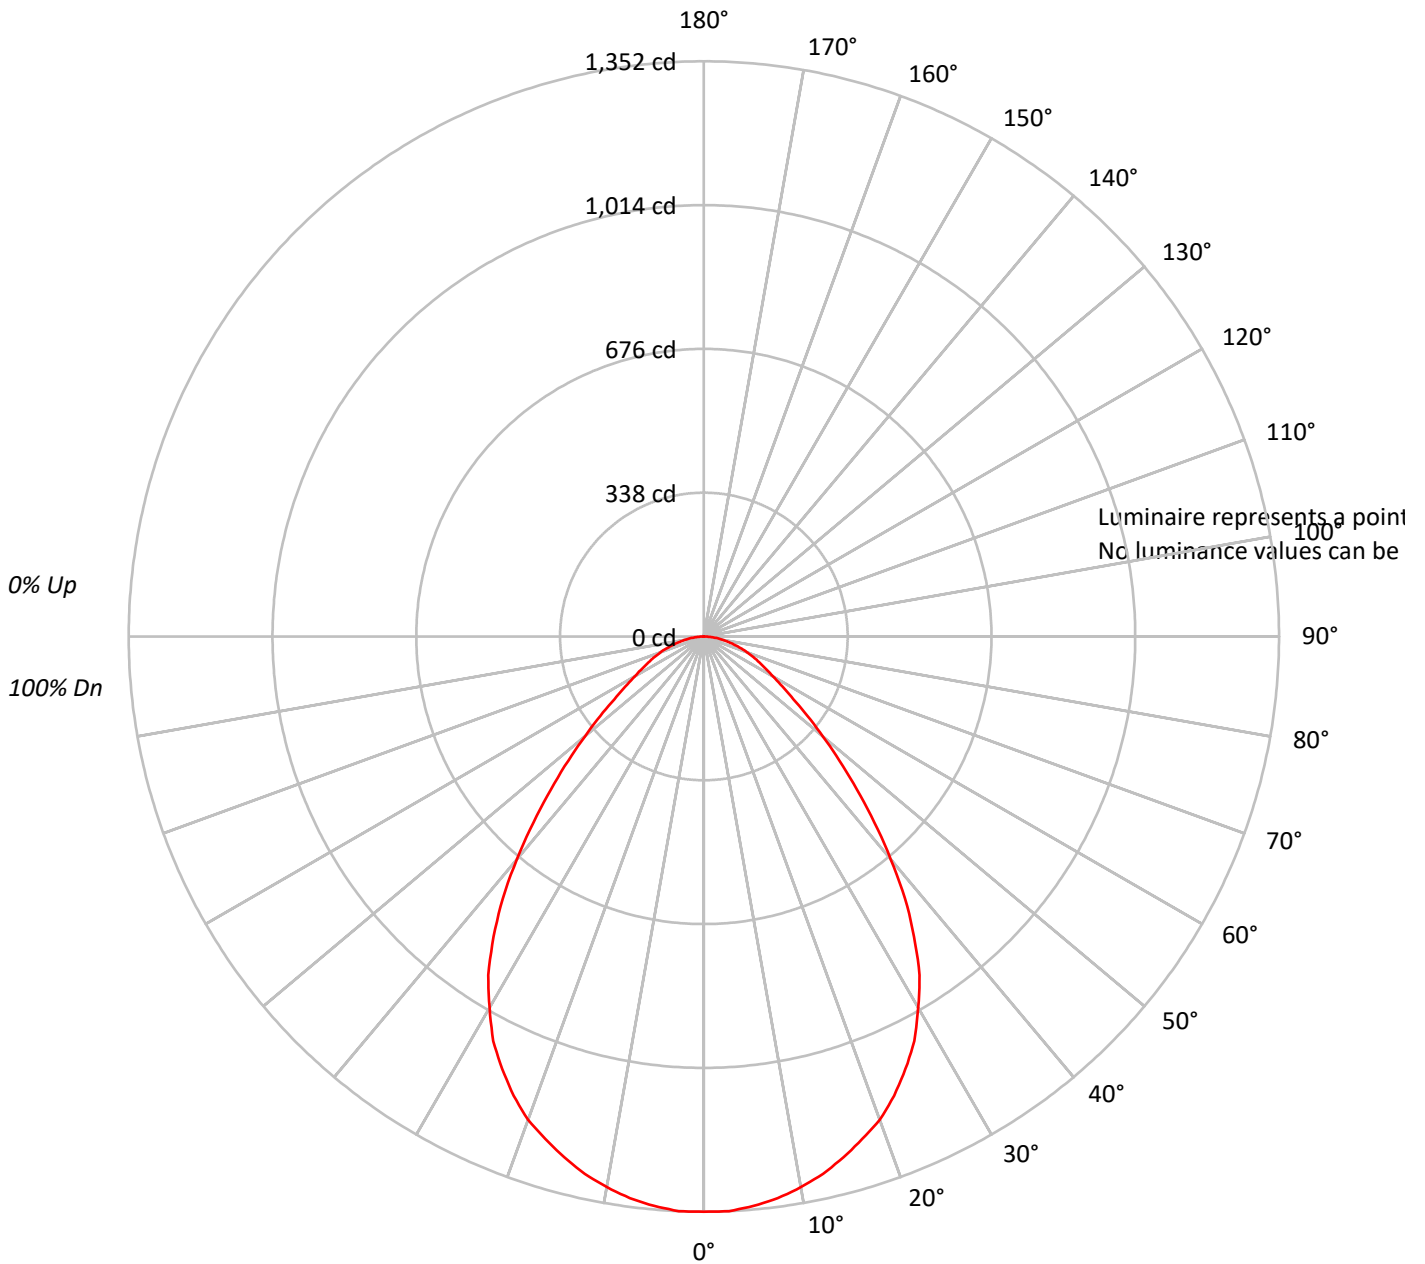



TEST NUMBER: P203133

CATALOG NUMBER: LE_6B20D010 EC6B10208030 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88			88
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77			77
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68			68
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60			60
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54			54
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49			49
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			44
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40			40
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37			37
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34			34

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203133

CATALOG NUMBER: LE_6B20D010 EC6B10208030 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.3	5.3
10°-20°	357.1	14.8
20°-30°	514.6	21.4
30°-40°	534.3	22.2
40°-50°	395.0	16.4
50°-60°	235.9	9.8
60°-70°	143.4	6.0
70°-80°	78.5	3.3
80°-90°	21.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	999.0	41.5
0°-40°	1533.3	63.7
0°-60°	2164.2	89.9
0°-90°	2407.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2407.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1352	
5°	1344	127
15°	1268	357
25°	1122	515
35°	862	534
45°	508	395
55°	257	236
65°	143	143
75°	73	79
85°	18	22
90°	0	



TEST NUMBER: P203133

CATALOG NUMBER: LE_6B20D010 EC6B10208030 6LBWMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1352.2
2.5°	1352.2
5°	1343.5
7.5°	1331.8
10°	1314.2
12.5°	1293.9
15°	1267.5
17.5°	1238.4
20°	1209.1
22.5°	1168.2
25°	1121.5
27.5°	1071.9
30°	1007.6
32.5°	943.4
35°	861.6
37.5°	776.9
40°	683.4
42.5°	592.9
45°	508.1
47.5°	432.2
50°	365.1
52.5°	306.6
55°	257.0
57.5°	219.0
60°	186.9
62.5°	163.5
65°	143.1
67.5°	125.6
70°	108.0
72.5°	90.5
75°	73.0
77.5°	58.4
80°	43.8
82.5°	32.1
85°	17.5
87.5°	8.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)