

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205508

Luminaire Tested: **LE_6B20D010 EC6B10209730 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205508
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10209730 6LBMGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1061.0 lumens
Efficiency: N/A
Efficacy: 51.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct

Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205508
CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBMGPH1

Luminous Intensity Polar Plot

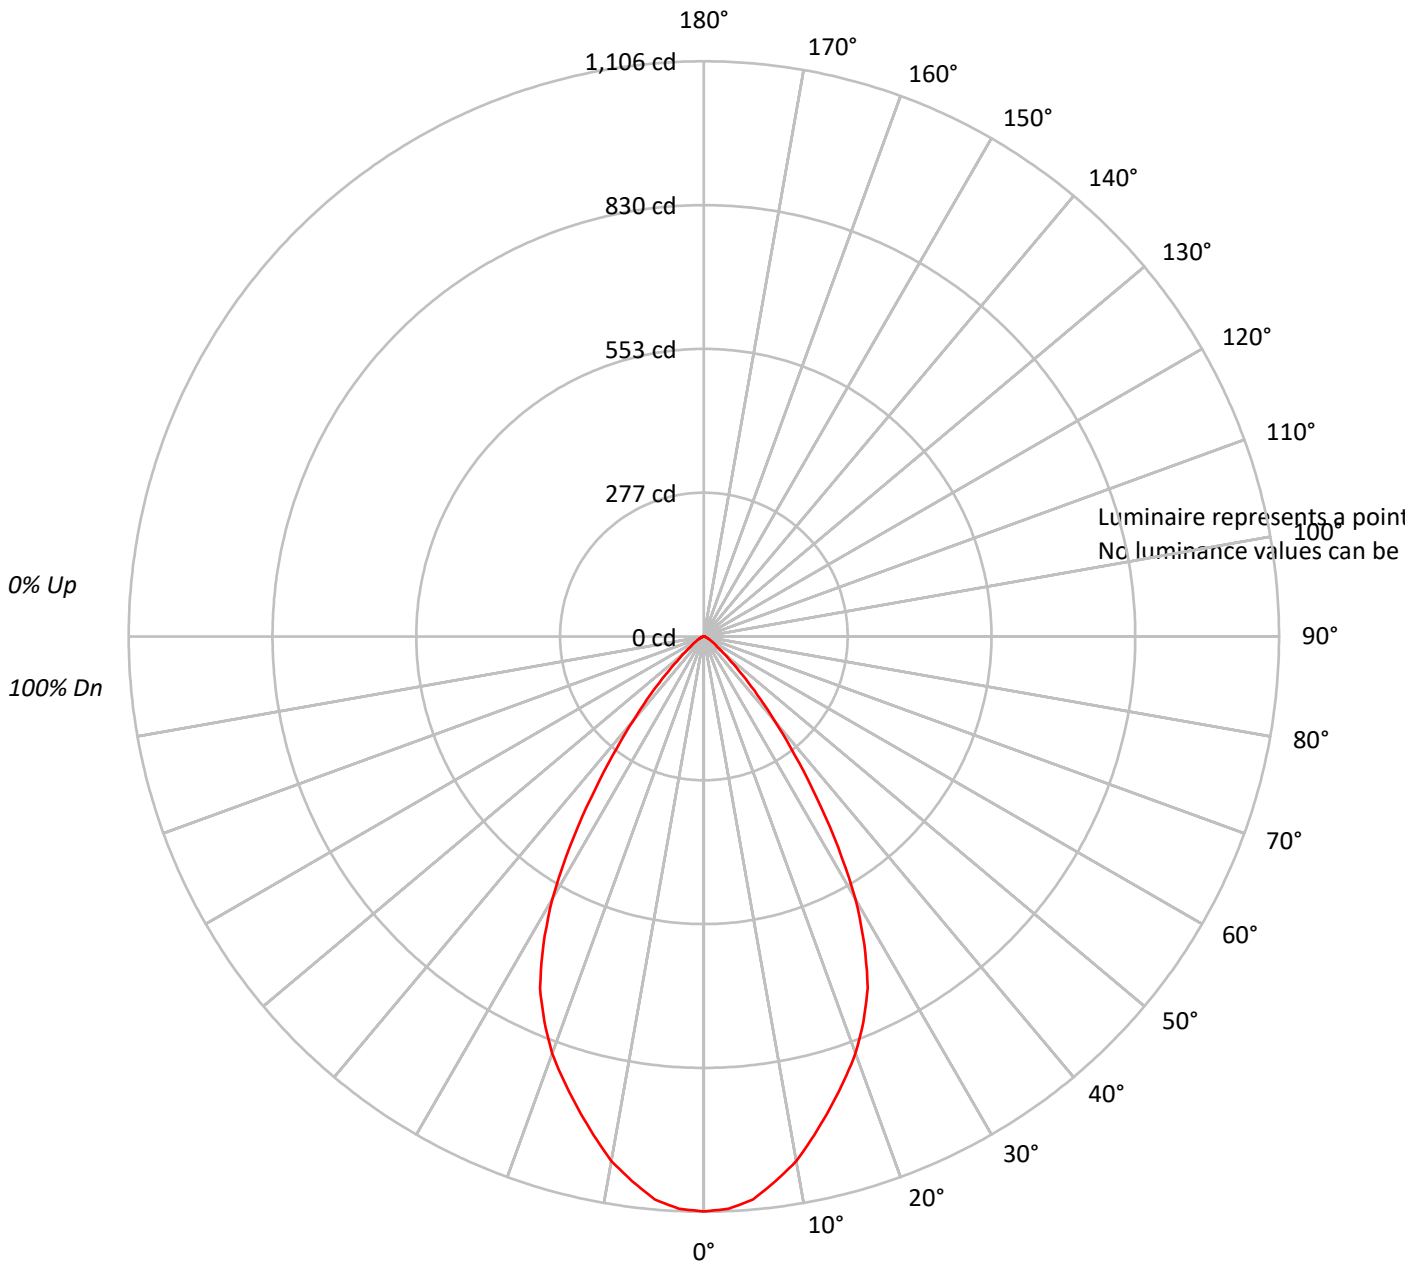



TEST NUMBER: P205508

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																												
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86																												
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79																												
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	81	78	75	73																												
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																												
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																												
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																												
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																												
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51																												
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48																												

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205508

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.6	9.6
10°-20°	263.6	24.8
20°-30°	335.8	31.7
30°-40°	237.3	22.4
40°-50°	86.6	8.2
50°-60°	24.0	2.3
60°-70°	8.7	0.8
70°-80°	3.0	0.3
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	700.9	66.1
0°-40°	938.3	88.4
0°-60°	1048.9	98.9
0°-90°	1061.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1061.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1106	
5°	1086	102
15°	938	264
25°	746	336
35°	377	237
45°	105	87
55°	26	24
65°	9	9
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P205508

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1105.6
2.5°	1101.4
5°	1086.4
7.5°	1056.4
10°	1024.2
12.5°	981.4
15°	938.5
17.5°	895.6
20°	852.9
22.5°	801.4
25°	745.6
27.5°	668.5
30°	582.9
32.5°	480.0
35°	377.1
37.5°	287.1
40°	210.0
42.5°	152.1
45°	105.0
47.5°	70.8
50°	47.1
52.5°	32.1
55°	25.8
57.5°	19.2
60°	15.0
62.5°	10.8
65°	8.6
67.5°	6.4
70°	4.2
72.5°	4.2
75°	2.1
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)