

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204691

Luminaire Tested: **LE_6B20D010 EC6B10209730 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204691
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10209730 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2134.2 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204691

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBPSMW1

Luminous Intensity Polar Plot

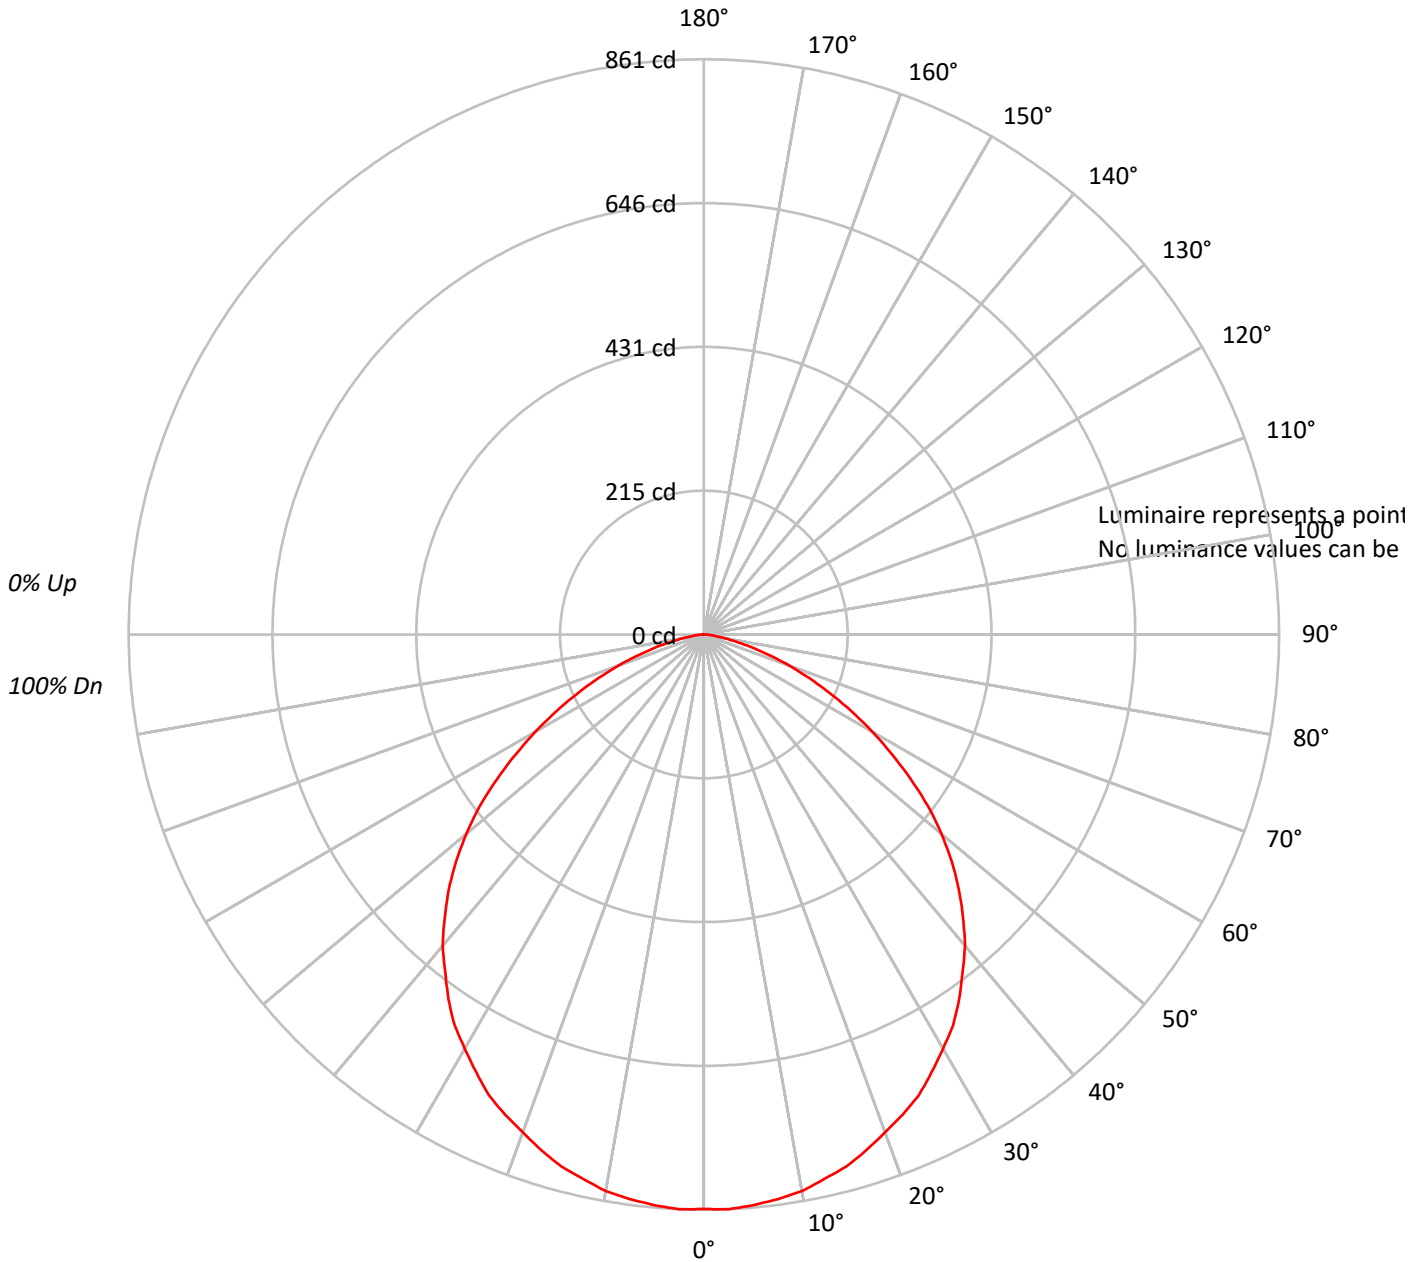



TEST NUMBER: P204691

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204691

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.5	3.8
10°-20°	232.3	10.9
20°-30°	349.8	16.4
30°-40°	416.2	19.5
40°-50°	415.4	19.5
50°-60°	337.9	15.8
60°-70°	207.8	9.7
70°-80°	80.5	3.8
80°-90°	12.9	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	663.5	31.1
0°-40°	1079.7	50.6
0°-60°	1833.0	85.9
0°-90°	2134.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2134.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	860	
5°	857	81
15°	824	232
25°	761	350
35°	666	416
45°	540	415
55°	378	338
65°	209	208
75°	73	81
85°	10	13
90°	0	



TEST NUMBER: P204691

CATALOG NUMBER: LE_6B20D010 EC6B10209730 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	859.9
2.5°	861.1
5°	857.4
7.5°	852.2
10°	846.0
12.5°	834.6
15°	824.5
17.5°	809.4
20°	792.9
22.5°	777.8
25°	761.2
27.5°	738.5
30°	715.8
32.5°	694.2
35°	666.4
37.5°	636.1
40°	608.2
42.5°	574.1
45°	540.0
47.5°	503.2
50°	464.1
52.5°	423.6
55°	378.1
57.5°	333.9
60°	290.9
62.5°	249.1
65°	208.6
67.5°	170.8
70°	135.2
72.5°	102.4
75°	73.4
77.5°	48.0
80°	29.1
82.5°	17.8
85°	10.1
87.5°	5.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)