

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204164

Luminaire Tested: **LE_6B20D010 EC6B10208035 6LBSH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204164
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10208035 6LBSH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2719.0 lumens
Efficiency: N/A
Efficacy: 130.7 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204164

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBSH1

Luminous Intensity Polar Plot

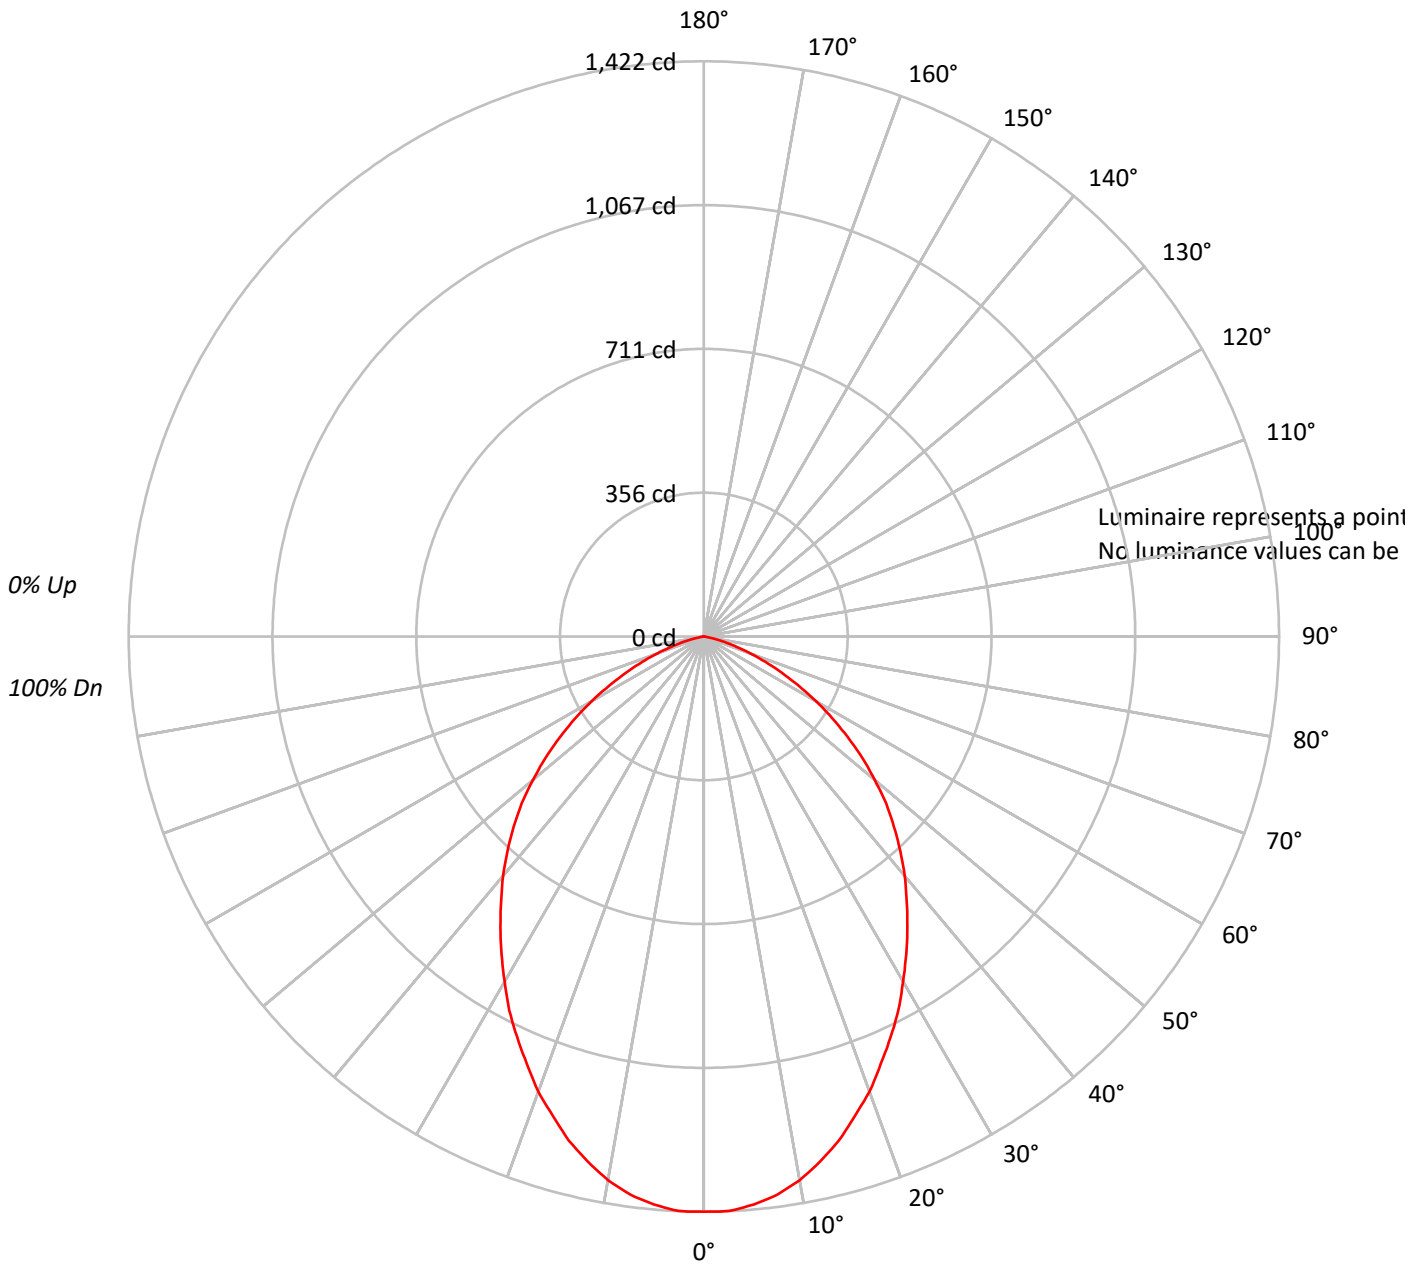



TEST NUMBER: P204164

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBSH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204164

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LSBH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.2	4.9
10°-20°	362.0	13.3
20°-30°	502.7	18.5
30°-40°	548.6	20.2
40°-50°	511.8	18.8
50°-60°	388.5	14.3
60°-70°	212.7	7.8
70°-80°	58.6	2.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	997.9	36.7
0°-40°	1546.6	56.9
0°-60°	2446.9	90.0
0°-90°	2719.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2719.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1422	
5°	1410	133
15°	1290	362
25°	1093	503
35°	877	549
45°	665	512
55°	434	388
65°	212	213
75°	51	59
85°	0	1
90°	0	



TEST NUMBER: P204164

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBSH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1422.0
2.5°	1422.0
5°	1410.0
7.5°	1392.0
10°	1365.1
12.5°	1329.1
15°	1290.2
17.5°	1242.4
20°	1197.4
22.5°	1143.5
25°	1092.6
27.5°	1041.8
30°	984.9
32.5°	931.0
35°	877.1
37.5°	823.2
40°	772.4
42.5°	718.5
45°	664.6
47.5°	610.8
50°	550.9
52.5°	494.0
55°	434.1
57.5°	377.2
60°	320.4
62.5°	263.4
65°	212.5
67.5°	164.6
70°	122.8
72.5°	83.9
75°	50.9
77.5°	24.0
80°	6.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)