

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202722

Luminaire Tested: **LE_6B20D010 EC6B10208035 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202722
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10208035 6LBWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2309.1 lumens
Efficiency: N/A
Efficacy: 111.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202722

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBWH1

Luminous Intensity Polar Plot

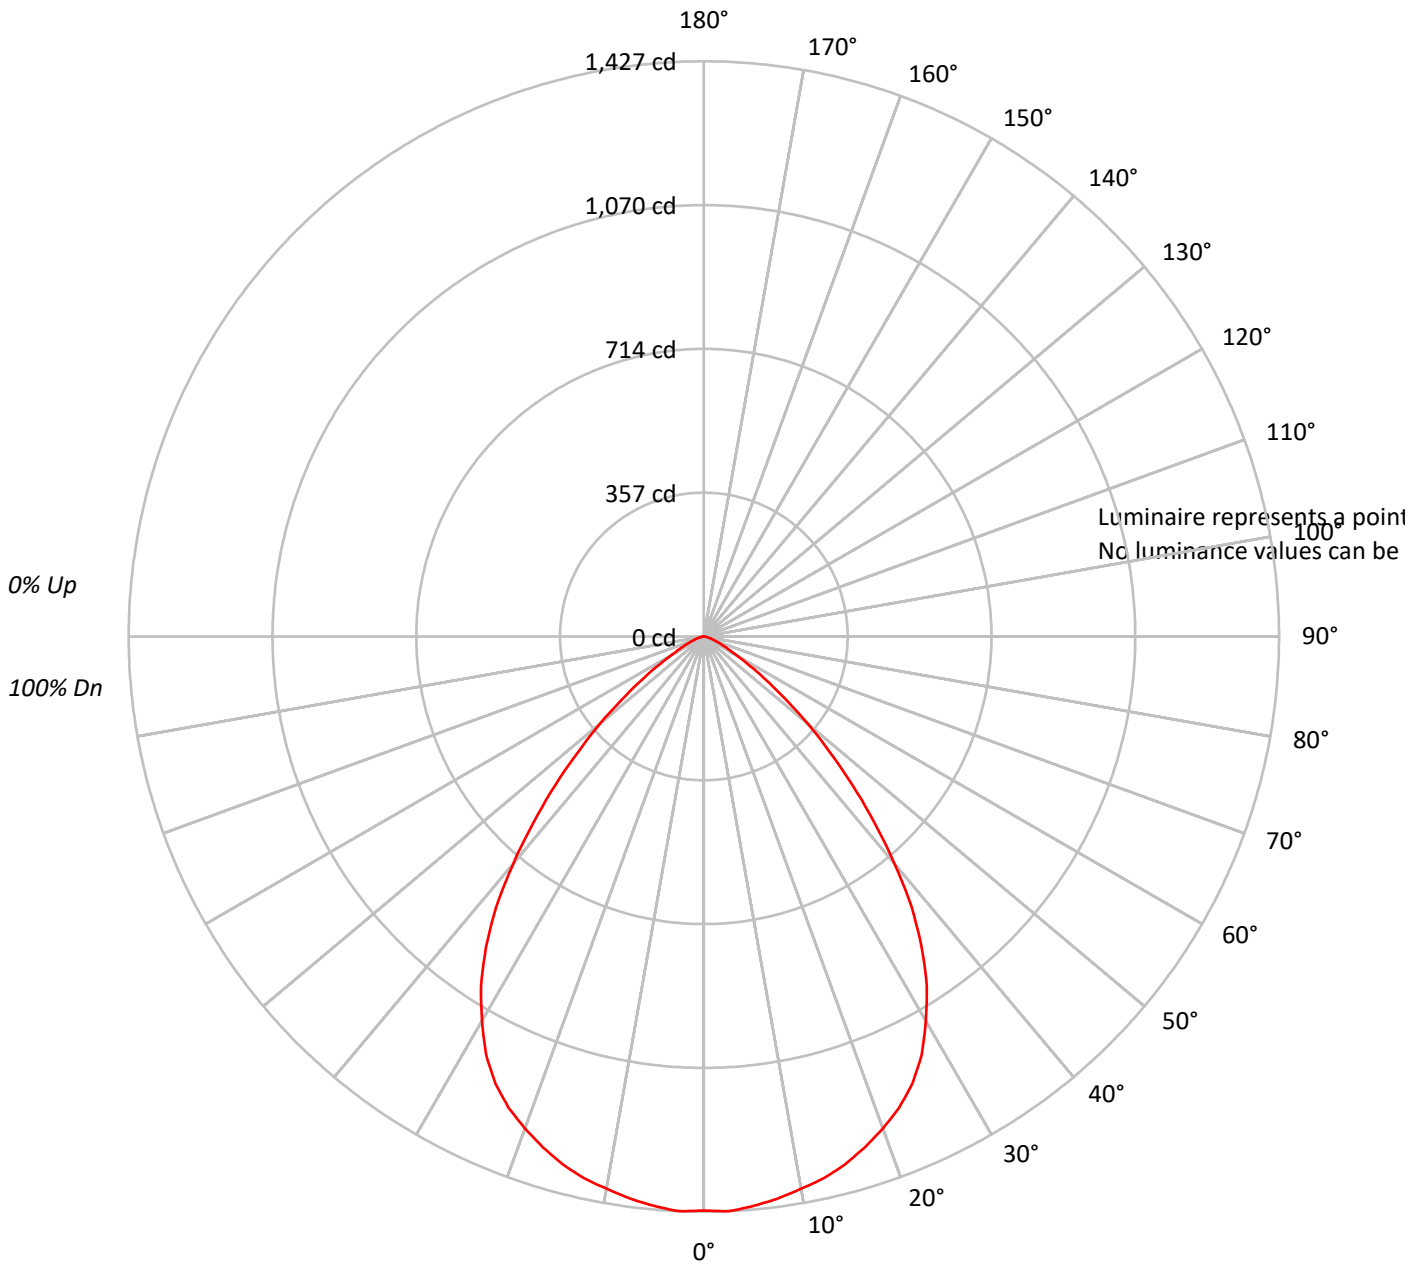



TEST NUMBER: P202722

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202722

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.5	5.8
10°-20°	381.7	16.5
20°-30°	559.6	24.2
30°-40°	582.4	25.2
40°-50°	403.0	17.5
50°-60°	175.4	7.6
60°-70°	53.8	2.3
70°-80°	16.2	0.7
80°-90°	2.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1075.8	46.6
0°-40°	1658.3	71.8
0°-60°	2236.7	96.9
0°-90°	2309.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2309.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1424	
5°	1418	135
15°	1355	382
25°	1224	560
35°	942	582
45°	521	403
55°	188	175
65°	51	54
75°	15	16
85°	3	2
90°	0	



TEST NUMBER: P202722

CATALOG NUMBER: LE_6B20D010 EC6B10208035 6LBWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1424.2
2.5°	1427.2
5°	1418.2
7.5°	1406.2
10°	1391.2
12.5°	1376.4
15°	1355.4
17.5°	1328.5
20°	1298.5
22.5°	1265.6
25°	1223.8
27.5°	1169.9
30°	1101.1
32.5°	1029.2
35°	942.5
37.5°	846.8
40°	736.0
42.5°	625.4
45°	520.6
47.5°	421.9
50°	335.1
52.5°	254.4
55°	188.5
57.5°	134.6
60°	92.8
62.5°	68.9
65°	50.9
67.5°	38.9
70°	26.9
72.5°	21.0
75°	15.0
77.5°	9.0
80°	6.0
82.5°	3.0
85°	3.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)