

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205401

Luminaire Tested: **LE\_6B20D010 EC6B10209035 6LBSLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205401  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B20D010 EC6B10209035 6LBSLI1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2379.4 lumens  
Efficiency: N/A  
Efficacy: 114.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205401

CATALOG NUMBER: LE\_6B20D010 EC6B10209035 6LBSLI1

### Luminous Intensity Polar Plot

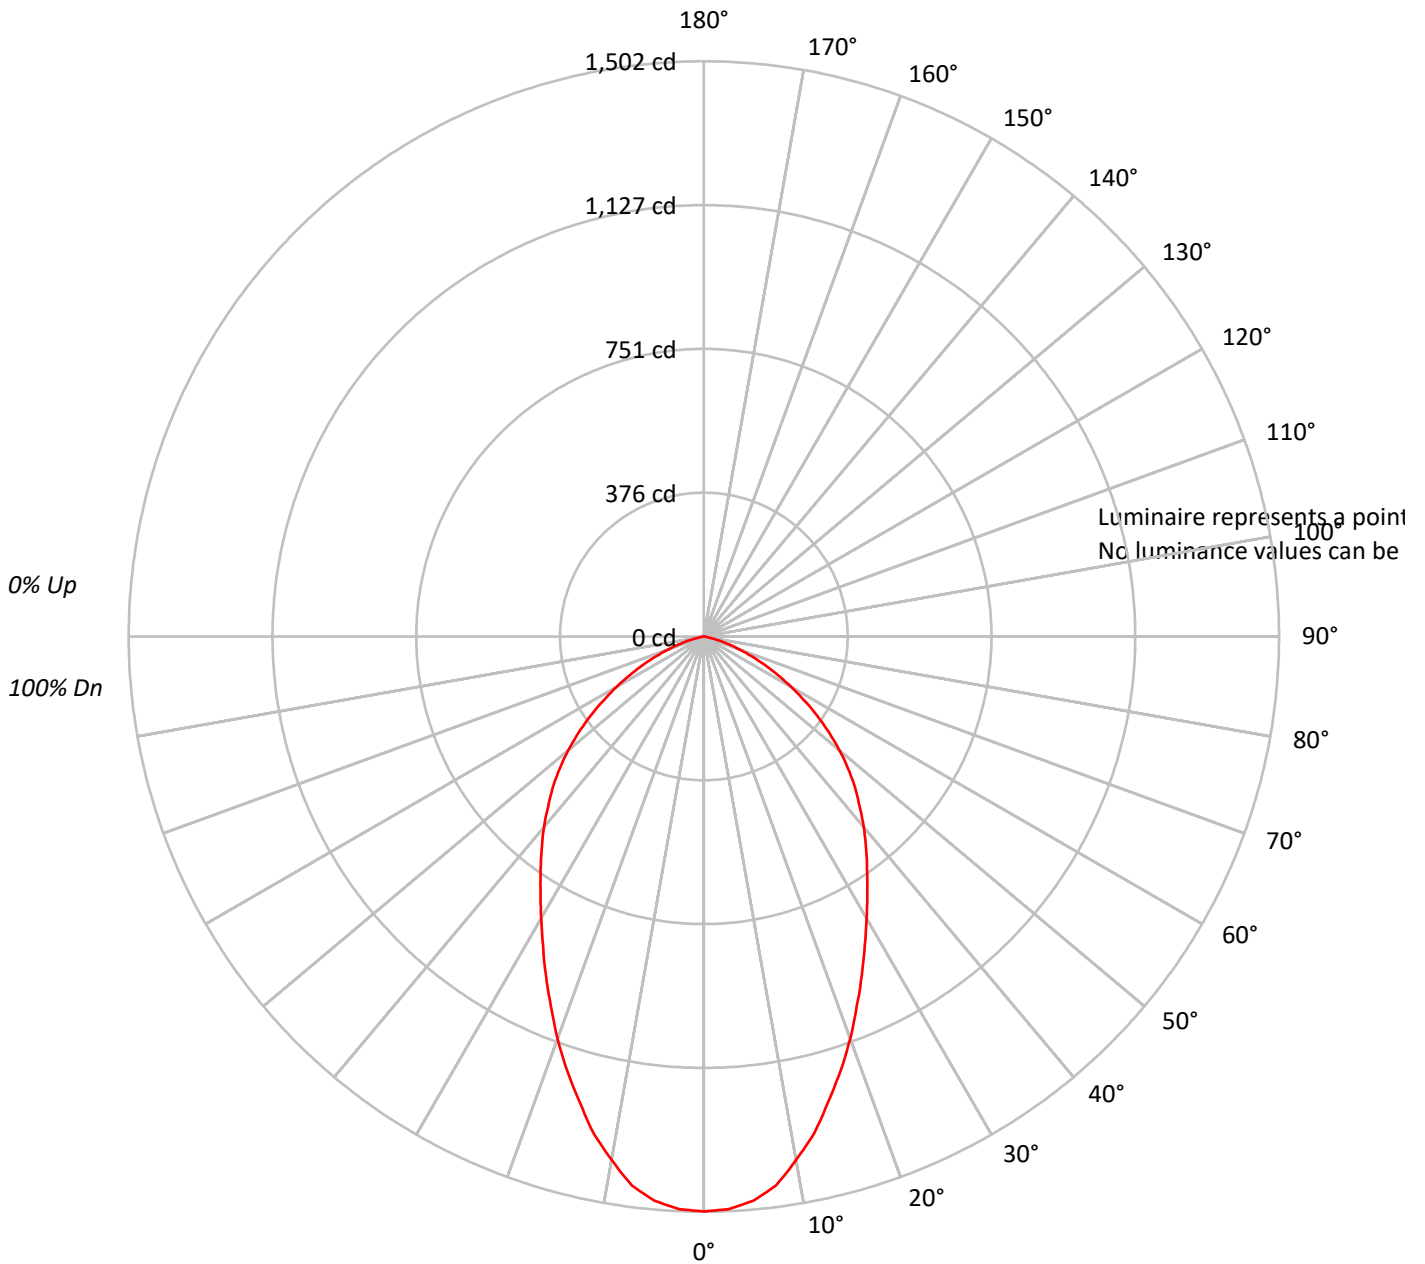



TEST NUMBER: P205401

CATALOG NUMBER: LE\_6B20D010 EC6B10209035 6LBSLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89				89
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77				77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68				68
4	88	78	70	64	86	77	69	64	74	68	63	72	67	62	70	65	62	60				60
5	82	71	63	57	80	70	62	57	67	61	56	66	60	55	64	59	55	53				53
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	47				47
7	71	59	51	46	70	58	51	45	57	50	45	55	49	45	54	49	45	43				43
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39				39
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36				36
10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33				33

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205401

CATALOG NUMBER: LE\_6B20D010 EC6B10209035 6LBSLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	138.4	5.8
10°-20°	352.3	14.8
20°-30°	449.2	18.9
30°-40°	465.8	19.6
40°-50°	429.2	18.0
50°-60°	322.9	13.6
60°-70°	174.3	7.3
70°-80°	46.8	2.0
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	939.8	39.5
0°-40°	1405.6	59.1
0°-60°	2157.7	90.7
0°-90°	2379.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2379.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1502	
5°	1479	138
15°	1256	352
25°	976	449
35°	743	466
45°	559	429
55°	362	323
65°	174	174
75°	40	47
85°	0	1
90°	0	



TEST NUMBER: P205401

CATALOG NUMBER: LE\_6B20D010 EC6B10209035 6LBSLI1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1501.6
2.5°	1496.5
5°	1478.9
7.5°	1446.0
10°	1387.8
12.5°	1329.6
15°	1256.4
17.5°	1188.1
20°	1117.4
22.5°	1044.0
25°	975.8
27.5°	910.0
30°	849.4
32.5°	793.8
35°	743.2
37.5°	695.1
40°	649.6
42.5°	601.6
45°	558.6
47.5°	510.6
50°	462.6
52.5°	412.0
55°	361.5
57.5°	310.9
60°	262.9
62.5°	217.4
65°	174.4
67.5°	134.0
70°	98.6
72.5°	68.2
75°	40.5
77.5°	17.8
80°	5.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)