

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204786

Luminaire Tested: **LE_6B20D010 EC6B10208050 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204786
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10208050 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2897.1 lumens
Efficiency: N/A
Efficacy: 139.3 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204786

CATALOG NUMBER: LE_6B20D010 EC6B10208050 6LBCSMW1

Luminous Intensity Polar Plot

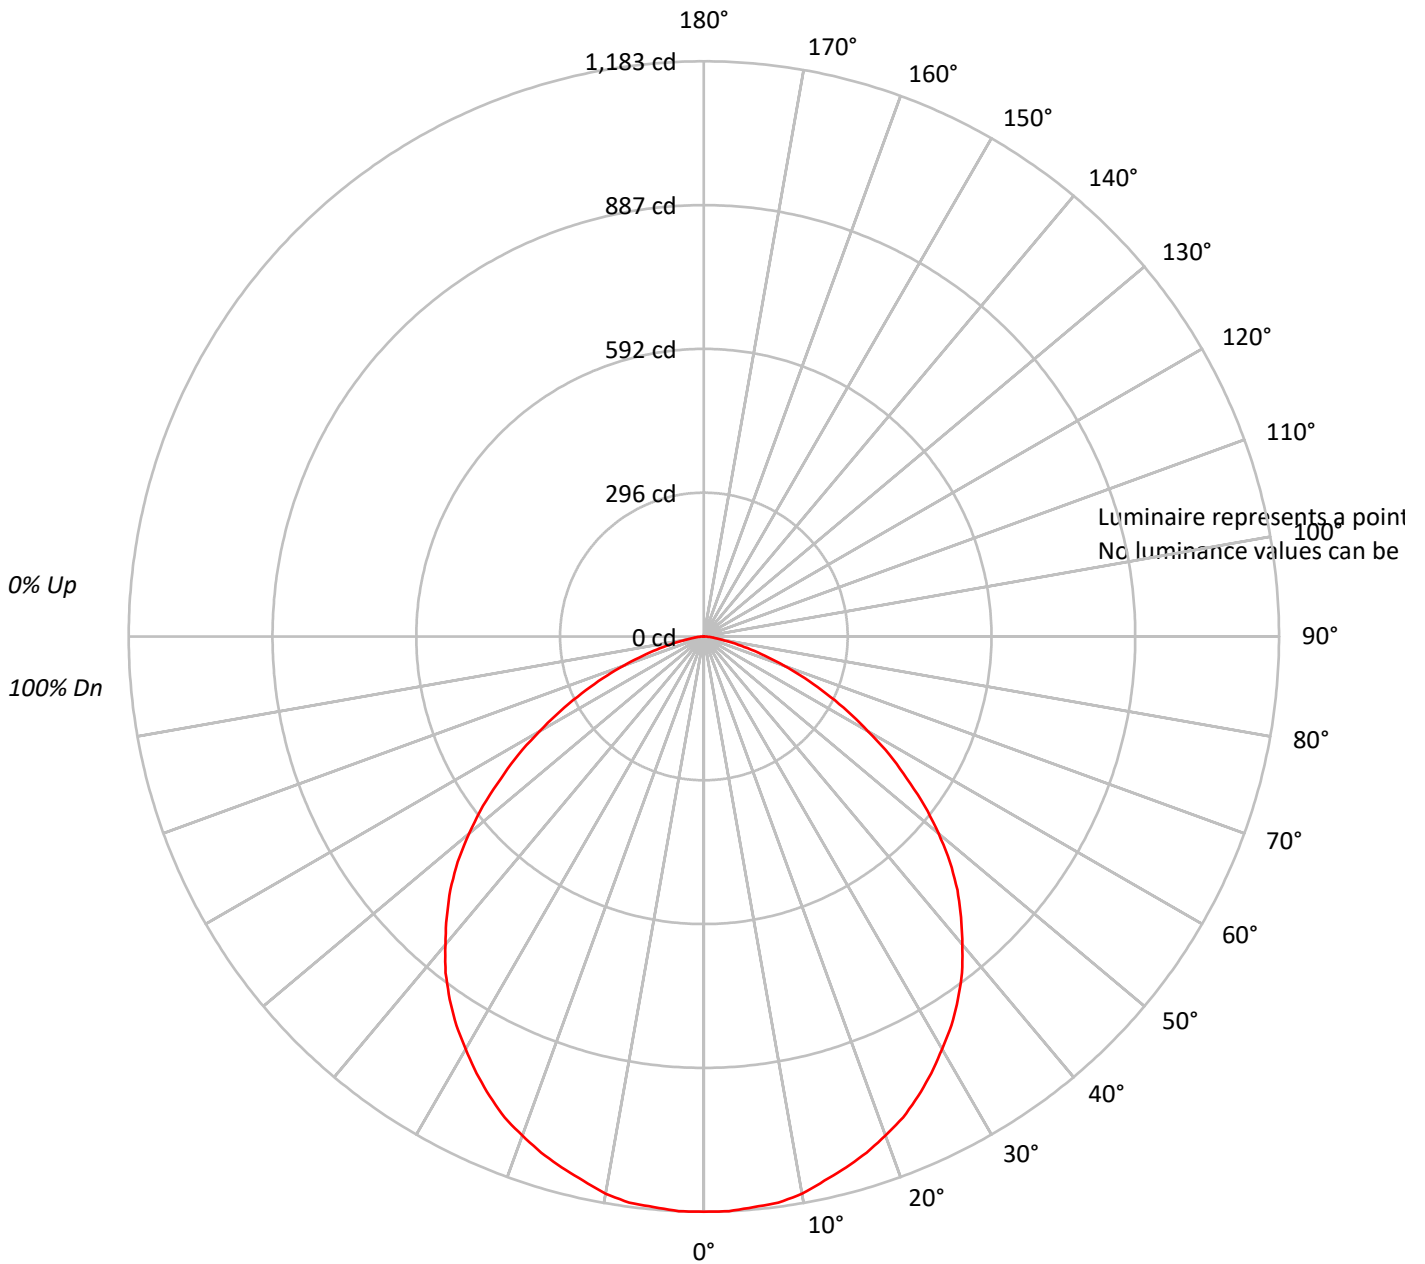



TEST NUMBER: P204786

CATALOG NUMBER: LE_6B20D010 EC6B10208050 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74			
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63			
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55			
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48			
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42			
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37			
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33			
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30			
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204786

CATALOG NUMBER: LE_6B20D010 EC6B10208050 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.1	3.9
10°-20°	319.2	11.0
20°-30°	480.1	16.6
30°-40°	569.0	19.6
40°-50°	566.3	19.5
50°-60°	456.5	15.8
60°-70°	276.2	9.5
70°-80°	102.5	3.5
80°-90°	15.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	911.4	31.5
0°-40°	1480.4	51.1
0°-60°	2503.2	86.4
0°-90°	2897.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2897.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1183	
5°	1178	112
15°	1131	319
25°	1043	480
35°	911	569
45°	737	566
55°	509	457
65°	277	276
75°	93	103
85°	12	15
90°	0	



TEST NUMBER: P204786

CATALOG NUMBER: LE_6B20D010 EC6B10208050 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1183.2
2.5°	1183.2
5°	1178.0
7.5°	1174.5
10°	1164.0
12.5°	1146.4
15°	1130.6
17.5°	1113.0
20°	1092.0
22.5°	1070.9
25°	1042.9
27.5°	1013.0
30°	979.6
32.5°	948.0
35°	911.1
37.5°	872.5
40°	826.9
42.5°	783.0
45°	737.4
47.5°	686.5
50°	630.2
52.5°	572.4
55°	509.1
57.5°	453.0
60°	389.8
62.5°	333.6
65°	277.4
67.5°	224.8
70°	175.5
72.5°	131.6
75°	93.0
77.5°	59.8
80°	35.1
82.5°	21.1
85°	12.2
87.5°	5.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)